

ADLINK Fanless Embedded Computers

■ RUGGED ■ DURABLE ■ FUNCTIONAL

www.adlinktech.com



ADLINK
TECHNOLOGY INC.



Matrix

Vol. S131

ADLINK Fanless Embedded Computers

Your Trusted Embedded System Provider

Rugged, Reliable, and Flexible

ADLINK's revolutionary series of Matrix fanless embedded computers provide an optimal computing platform with expandable options to customers. These platforms are the result of combining ADLINK's expertise in x86 platform design, versatile I/O function development, and thermal design to push fanless systems to a higher standard, including a wide operating temperature, 5 Grms vibration, and cable-free durable structure.


With a sturdy hardware design, the Matrix MXC and MXE series are ideal for developing reliable embedded systems effortlessly and offering time-to-market solutions to mission-oriented industries. ADLINK takes the advantage of flexibility to offer diverse comprehensive I/O interfaces to meet requirements for a variety of industrial applications.



Expandable Embedded Computers

MXC series

A flexible open architecture design with PCI/PCI Express peripheral slots

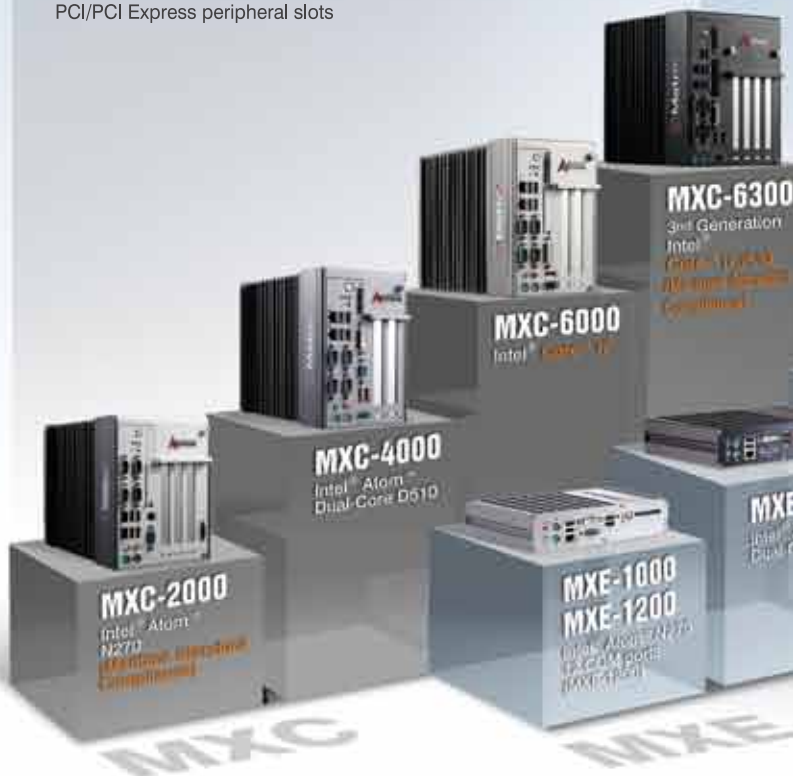

Integrated Embedded Computers

MXE series

Platform providing comprehensive I/O interfaces and versatile options for a wide range of application solutions



Rugged

Reliable

Flexible

Optimal Features of the Matrix Series

Compact

Smaller form-factor for easier installation and maintenance




Fanless

Fanless design significantly extends MTBF to 190,000 hours and minimizes the maintenance cost.



Rugged

The Matrix is designed to operate in a -20 to 70°C (-4 to 158°F) wide temperature range and withstand up to 100 G shock and 5 Grms vibration, making it ideal for deployment in harsh environments.

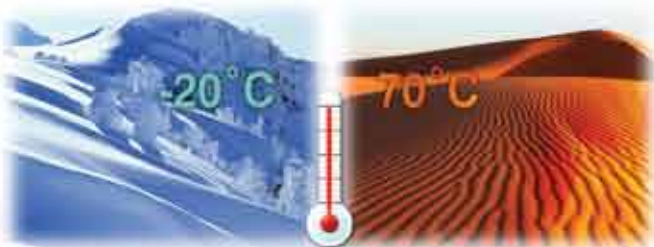

Note: Extending the operating temperature to is optional and requires use of an industrial solid-state drive storage device.

Application-specific

By integrating ADLINK DAQ, DIO, motion and vision technologies, the Matrix can provide specific I/O functions on-board for your applications.






Video Surveillance/
Recognition

Facility Management

Electrical Substation



Unique Design of the Matrix Series

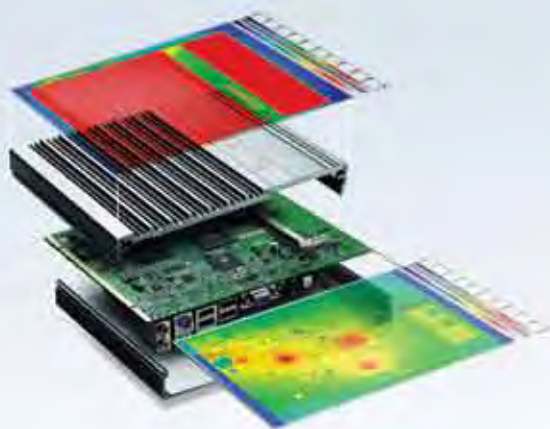

Complete Consideration for Heat Dissipation

Mechanical and electrical engineers worked from the early design stages of the Matrix to ensure the best conductive heat dissipation performance possible. All components, such as the CPU, chipset, memory, clock generator, MOSFET, and power choke, etc. generate heat and are thus placed on the top of the PCB and kept at a minimal distance from the aluminum case. Thus the shortest path of heat conduction and lowest thermal resistance can be provided to guarantee the thermal stability of the Matrix at a 70°C (158°F) ambient temperature.

*This option guarantees cold boot of the system at -20°C (-4°F) and operation with 100% loading at 70°C (158°F).

The industrial solid-state drive storage option is required. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

**Cable-free,
Trouble-less**



Cable-Free and User-friendly Mechanical Structure

The Matrix features an excellent cable-less design. All components and connectors are directly mounted on the PCB via SMT and DIP processes instead of cable connections. The result is an extremely strong and durable mechanical structure suitable for the harshest of environments. The Matrix MXC series—being an expandable embedded computer—also provides a very user-friendly design for system installation. You can open the chassis and install your PCI/PCIe card simply by loosening one screw. And, only four screws are used to access the hard disk drive. This mechanical design provides high reliability and durability and easy access for installation and maintenance.



Intelligent Transportation

Machine Automation



Wide Range and Reliable DC Power Input

We know you may need to deploy the Matrix anywhere. So, we designed the Matrix with wide range DC input to allow it to be powered everywhere. Regardless if there are 12 or 24 volts available at the site, or you have a 19 V laptop adapter handy, you can simply feed the power into the Matrix series and it will run. The Matrix is also ideal for use with solar power because of the great tolerance for the variation of solar panel output. The power circuitry of the Matrix was carefully designed with high-quality components (regulators, capacitors, and inductors) to supply reliable power under almost any circumstances.



High Tolerance Vibration and Shock Capability

Designed for the customers looking for robust and reliable industrial platforms, the Matrix fanless embedded computers underwent high tolerance up to 100 G shock duration (MXE Series) and 5 Grms vibration resistance for harsh environments, such as transportation applications.

New Product Development Process

Functionality

A Meticulous Commitment to Product Quality

ADLINK continues to elevate and refine quality and efficiency. Our engineering team is dedicated to developing creative solutions for improving product capabilities. With our solid development process, tangible benchmarks are verified with rigorous testing and verification. From the very earliest planning stages to the mass production stage, quality of engineering and hardware and software testing of all proposed functions is assured.



Planning Stage

Identifies design obstacles and solves them, ensuring that the basic unit performs to design goals and specifications



Production

Pilot runs include rigorous testing of product samples and mass production for reliability and quality



Design Stage

Explores all opportunities to improve existing solutions for enhanced quality and performance, with flexibility and efficiency supported by modular circuit design



Testing & Verification

Thorough, dependable process for testing and verification in simulated industrial network environments, with resulting integrity reporting


Operation

IO Ports

Performance

Rugged Design with Rigorous Testing and Verification

ADLINK's Matrix fanless embedded computers feature cable-free construction, wide operating temperature ranges, and extended MTBF of up to 250,000 hours, fulfilling the needs of automation users in harsh working environments. To meet industrial certifications for ruggedness in specific applications. The ADLINK Matrix line subjected to rigorous testing for verification. All ADLINK Matrix products are proven reliable and flexible platforms in any industrial application.

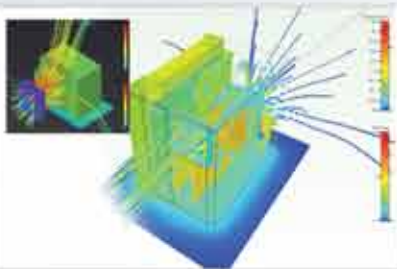

Optimizing Thermal Design

Thermal Simulation allows testing and design adjustment before prototyping. Thermal analysis avoids heat issues that can cause system damage, assuring long-term system quality and optimizing system performance.



Temperature Cycling

Temperature cycling consists of multiple cycles of changing temperature between predetermined limits. Since products have different surface areas and the materials different coefficients of expansion, weaknesses are revealed. Temperature cycling determines potential for thermal fatigue, cracking and defective components and forces latent defects into failures.



HALT Testing

HALT testing determines operating and design limits, providing reference for developers to increase product integrity and robustness. For enhanced reliability, ADLINK's Matrix line undergoes HALT testing in early design stages, providing continuous fine tuning and optimizing designs to deliver maximum reliability.



Rugged Vibration & Shock Resistance

Withstanding the rigors of harsh environments is critical in industry computing. ADLINK's Matrix line withstands up to 5G vibration & 100G shock, providing reliable platforms for any industrial application.

Best Application-Specific Platform with Versatile ADLINK I/O Cards

Unshakeable Fanless Platform

ADLINK's MXC series provides fanless embedded computers for high-performance embedded solutions. Leading the field, high-performance computing power combined with PCI/PCIe high-speed expansion slots in a compact enclosure fully enable integration of a variety of applications.



Digital Surveillance System




Factory Automation & Machine Vision



Telemedicine Workstation
(Entry PACS)



Maritime Automation

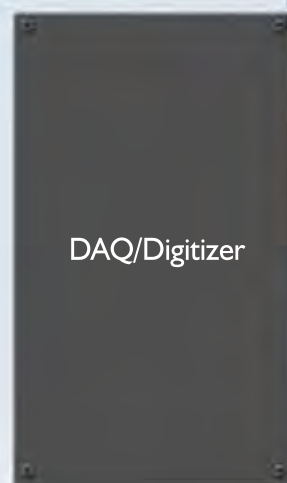

DAQ/Digitizer



PCI-7250
8-CH Relay Outputs &
8-CH Isolated DI PCI
Cards



PCIe-6208V
16-CH 16-Bit PCI
Express Voltage
Output Card



Motion Control



PCI-8154
Advanced 4-axis Servo
& Stepper Motion
Controller with Modular
Design



Signal Acquisition &
Generation



PCI-9527
24-Bit High-Resolution
Dynamic Signal
Acquisition and Generation



Machine Vision



HDV62A
1-CH PCI Express®
HDMI Video & Audio
Capture Card

Versatile I/O function with PCI/PCIe

high-bandwidth expansion slots in a compact package. The MXC series' combined features make it the best choice for applications requiring a compact profile, maximum computing power, and strong I/O capability in environmentally challenging applications, including machine vision, factory automation, maritime automation and video surveillance.

Enables integration of off-the-shelf

PCI/PCIe cards such as ADLINK's full spectrum of frame grabbers, motion controllers, and I/O cards. All this, plus the clear benefit of ADLINK's comprehensive expertise and experience in industrial automation, allows the MXC series to embody an ideal platform for a variety of applications.



PCI-7260

8-CH High-Power Relay Outputs & 8-CH Isolated DI PCI Card



PCI-7300A

80 MB/s High-Speed 32-CH Digital I/O PCI Card



PCI-7432

64-CH Isolated Digital I/O PCI Cards



PCI-9112

16-CH 12-Bit 110 kS/s Multi-Function DAQ Card



PCI-9221

Low-Cost 16-Bit Multi-Function DAQ Card with 2-CH Encoder Input



PCI-9223

16-CH 16-Bit 250/500 KS/s Multi-Function DAQ Cards with Encoder Input



PCIe-7296

96-CH Opto-22 Compatible PCI Express DIO Card



LPC1e-7230

32-CH Isolated DIO Card



PCIe-7300A

80 MB/s High-Speed 32-CH Digital I/O PCI Express Card



PCIe-7350

50 MHz 32-CH High-Speed Digital I/O Card



DAQ-2005

4-CH 16-Bit 500 kS/s Simultaneous-Sampling Multi-Function DAQ Card



DAQe-2005

4-CH 16-Bit 500 kS/s Simultaneous-Sampling Multi-Function PCI Express® DAQ Card



PCI-8158

Advanced 8-axis Servo & Stepper Motion Controller with Modular Design



PCI-8136

6-CH Quadrature Encoder and Multi-Function I/O Card



PCI-8144

4-axis Stepper Motion Controller



PCI-8164

Advanced 4-axis Servo & Stepper Motion Controller with High-Speed Triggering



PCI-9820

2-CH 14-Bit 65 MS/s PCI Digitizer with SDRAM



PCI-9846

4-CH 16-Bit 40 MS/s PCI Digitizer with 512MB Memory



HDV62

HDTV Frame Grabber / HDMI Video Capture Card



GIE64+

4-CH PCI Express® Power over Ethernet Frame Grabber



GIE62+

2-CH Gigabit Ethernet Frame Grabber Supporting Power over Ethernet



RTV24

4-CH PCI Real-time Video Capture Card for Standard



FIW64

4-CH PCI Express® IEEE 1394b Frame Grabber



CPL64

2-CH PCI Express® PoCL Frame Grabber

Intelligent Unmanned Ground Vehicles



Application

Intelligent Unmanned Ground Vehicle systems consist of vehicles functioning with no human operator onboard. The unmanned vehicles can be remotely controlled or guided, or autonomous vehicles capable of self-navigation based on detected environmental factors.

The systems are valuable in many scenarios in which it may be dangerous, inconvenient, or impractical to have a human operator present. Vehicles are outfitted with sensors to detect environmental conditions, and either autonomously operate in response, or feed gathered information back to a central or remote operator who then applies vehicle control accordingly through a command transmission system.

The initial goal of UGV systems was to equip off-road vehicles with computer-controlled unmanned operability, including integrated remote control systems; on-road and off-road navigation; detection capability; and route planning algorithms, all in addition to standard mobility.



ADLINK Solution ■ Matrix MXC Series

ADLINK's high performance MXC-6000 fanless computer proves to be the ideal platform for these in-vehicle systems. With a wide range of input power options and built-in resilience, the MXC-6000 more than fulfills the application's specific requirements. PCI/PCIe expansion slots allow installation of a variety of PCI, PCIe add-on cards and a rich I/O front panel connectivity supports UGV needs to accommodate vision card, camera, navigation node, vehicle control node via GbE Ethernet ports, COM ports, and USB ports.

Electric Vehicle Battery Exchange System



Application

To encourage the use of electric scooters to help improve air quality and gradually eliminate fossil fuel use within the next 10 years, Taipei City Government plans to set up hundreds of battery exchange stations which will accommodate thousands of electric scooters.

The Electric Vehicle Battery Exchange System classifies batteries as Waiting to Charge, Charging, and Charged. Users simply pay with a debit card, enter instructions on a computer screen, and insert a depleted lithium battery in exchange for a charged one. The entire process takes only a few minutes as opposed to the hours spent waiting for a battery to charge.



ADLINK Solution ■ Matrix MXC Series

The Matrix MXC-4000 provides system stability and reliability required to best support the Electric Vehicle Battery Exchange System. The system design, with one PCI and one PCIe slot, allow users to utilize PCI-7841 CAN interface cards to implement the transactions.

The MXC-4000, compact and reliable with a fanless and cable-free design, accommodates -10 to 60°C (-14 to 140°F) operating environments, and is equipped with thermal fins for efficient cooling in harsh environments.

Outdoor Unmanned Traffic Monitoring System




Application

Remote observation and identification of traffic infractions in urban settings has become standard procedure in the last decade. As technologies evolve, challenges in such solutions increase commensurately.

The system must integrate diversified functionality. Activity must be accurately monitored and desired event capture accomplished efficiently.

The internal application then performs further analysis to determine if a violation has occurred. Finally, the pertinent media-based record must be remitted to a control center. Critical requirements thus comprise powerful computing performance and rich data transmission capabilities.

Additionally, however, the systems are primarily deployed in environments with little or no protection from exposure to the elements and pollutants, factors which must be prevented from impairing system results. Finally, since limited physical access to system components is common to deployment locations, remote maintenance and management are essential to system administrators.

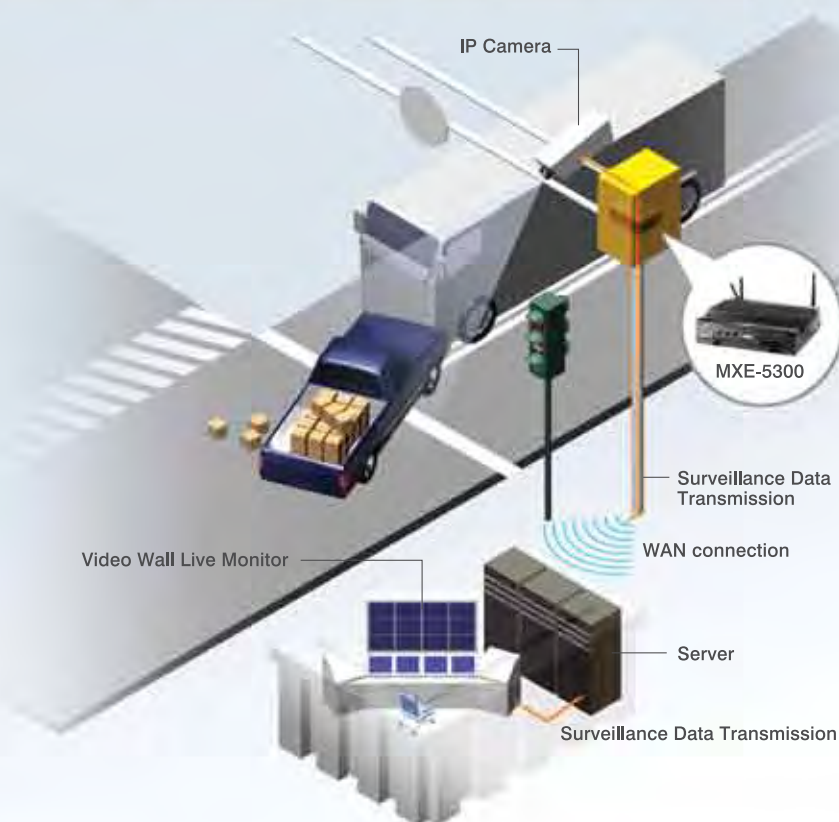

ADLINK Solution | Matrix MXE Series

ADLINK's MXE-5300 Intel® Core™ i7 processor-based fanless embedded computer with superior wireless accessibility is ideally suited to the needs of the system. In addition, a rich I/O interface easily connects to co-functional system elements, such as cameras over GbE and traffic signal controls through DIO or COM ports.

Electronic Highway Tollbooth and Surveillance Systems




Application

Tollbooth lanes are often utilized to allow motorists in single-occupant vehicles to access high-occupancy vehicle lanes. Tolls are collected either by manned tollbooths, automatic number plate recognition, or electronic toll collection systems.

The main function of a tollbooth lane is to identify, record, and control passage of vehicles, to carry out toll payments and transmit acquired information to monitoring and local toll plaza facilities. Toll payment information is monitored and aggregated at each toll plaza and reported to central administration for further custom processing.

Toll systems require an industrial platform integrated with serial communication cards to connect and control the systems, remit related data to the control center, and control barriers, read vehicle license plates, and control trigger settings via capture cards.

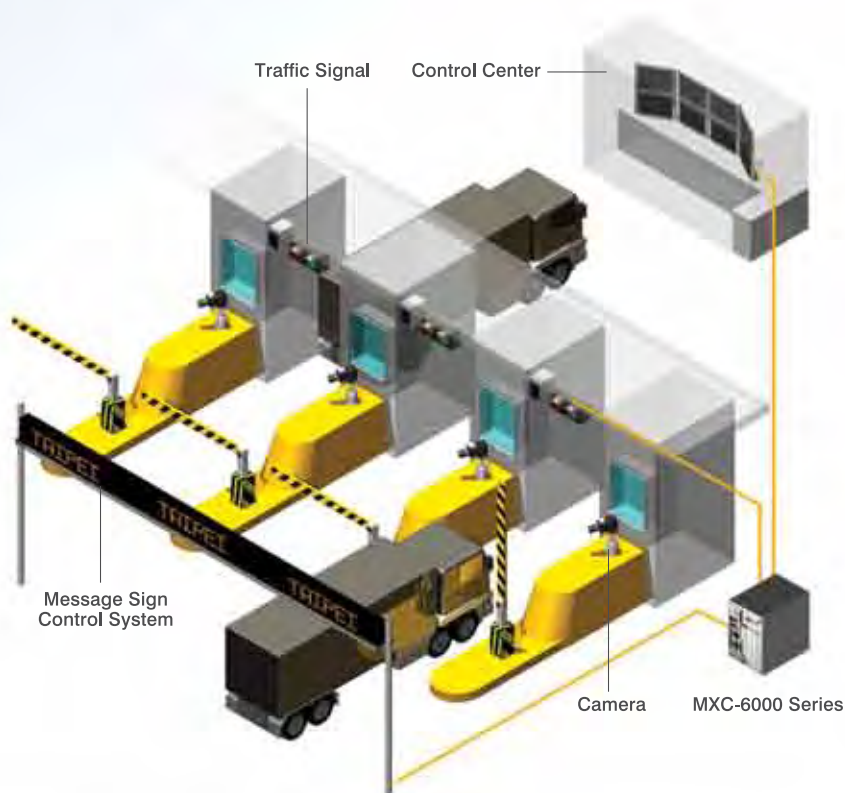

ADLINK Solution ■ Matrix MXC Series

The MXC-6000 fanless expandable embedded system is perfectly suited for electronic toll gate and surveillance applications with high performance Intel® Core™ i7 Processor with superior graphic performance, two GbE ports, four serial ports and two PCI/PCIe expansion slots. All electronics are securely housed in a compact, rugged chassis with thermal cooling fins, for easy and dependable deployment, even in severe conditions.

Each surveillance camera is connected to a 2/4-port PCI/PCIe video capture card or PoE frame grabber. Captured images transferred to system storage can be scaled down with application software. Entry systems are connected to the control center via Ethernet, and onboard serial ports or add-on serial communication cards enable reliable, high-speed serial communication.

► Integrated Embedded Computers

In-vehicle Multimedia and Surveillance Technologies



Application

The popularity of in-vehicle multimedia access is increasing with the evolution of digital content and distances travelled. Mass transit system or long-distance bus users can experience improved quality of travel when accompanied by music, video, and even interactive internet content. Also increasing in desirability is personal access to the internet. Wireless AP can be implemented on public transport to provide wireless internet services to passengers.

In addition, with growing concerns over security, the demand for in-vehicle surveillance technologies is also expanding. With the convenience and cost-effectiveness of Ethernet networks and wireless technologies, IP surveillance systems can be implemented on buses or trains to enhance passenger safety, fleet management, and traffic monitoring, especially in combination with vehicle positioning provided by GPS, delivering real-time driving status to operators and system administrators.

Given the limited space available in vehicles, meeting the various requirements of such systems is clearly a challenge. In-vehicle systems must provide multimedia content, along with data acquisition from both inside and outside the vehicle, with transmission of the data to centralized control facilities. Finally, the system must operate effectively under the conditions unique to moving vehicles, including high frequency of vibration and shock and severe temperatures.



ADLINK Solution | Matrix MXE Series

With sophisticated mechanical design and discreet circuit layout, the ADLINK Matrix series offers a rugged platform suitable for severe operating environments. The Matrix series packs versatile I/O application solutions into minimized form factors, to meet the needs of a huge variety of applications. Matrix provides a full spectrum of fanless embedded computers to fulfill every application-specific task.

The Matrix MXE series accommodates powerful Intel® processors to fulfill delivery of digital content while processing surveillance data received through multiple GbE Ethernet ports. With the flexibility of an internal mini PCIe module, the Matrix-E series takes full advantage of a diversity of wireless protocols such as 3G/UMTS/WiFi and Bluetooth.

➤ Integrated Embedded Computers

Using an Integrated Fanless Embedded Computer for a Vehicle Identification System



Application

A vehicle identification system (VIS) is a solution for automatic licence plate recognition and vehicle identification that helps to increase the effectiveness of modern security systems, which is now considered part of an intelligent transportation system (ITS). VIS technology captures vehicle licence plates, analyzes images, and increase the level of security, based on a multi-criteria comparison of a photo of the vehicle and a photo stored in storage. The system needs to provide long-term durability and reliability to operate effectively day and night to monitor both static and moving vehicles.

In light of the increasing demands for VIS, ADLINK developed a series of embedded computers—the Matrix MXE series—to provide a robust solution with versatile integrated I/O options suitable for many different fields, such as access control to public or private car lots, logistics, roads and motorways, police force applications and automatic detection of traffic violations.



ADLINK Solution ■ Matrix MXE Series

The ADLINK MXE series is an exceptionally rugged embedded controller for operating in harsh environments. Its -20°C to 70°C (-4°F to 158°F) temperature range allows it to operate outdoors in both hot summer days and cold winter nights. The Matrix can also be deployed on vehicles as it can withstand 5 Grms vibration. And, its fanless and cable-less structure ensures extensive durability for long-term usage.

The Matrix MXE series features an Intel® embedded processor to deliver adequate performance at low-power. The MXE series also integrates versatile generic and special purpose I/O features to support a wide variety of applications. The on-board Gigabit Ethernet is designed for connecting cameras for surveillance and image recognition applications, while its COM ports meet the requirements in most machine automation and facility management applications.

Combining rugged design and integrated I/O functions, the ADLINK MXE series offers the most versatile choice for your applications.

Feeder Terminal Unit in Electrical Transmission Network




Application

In conventional urban electrical power supply systems, electricity generated at the power plant level is converted in substations, level by level, for transmission through cable networks to user sites.

Numerous nodes distributed throughout the network separate the overall system. Integrity of supply is recorded in a FTU (feeder terminal unit) of the node, fed back to a corresponding RTU (remote terminal unit) in the originating substation and finally gathered in the SCADA system.

The FTU comprises a data concentrator and protective relays, two or four, dependent on the power line input/output arrangement and deployment. When the protective relay is closed, power is transmitted between the FTUs for the specific powered area. In current implementation, the protective relays automatically open to interrupt transmission in segments and narrow power-down potential in controlled areas in the event of system malfunction or damage to supply lines.

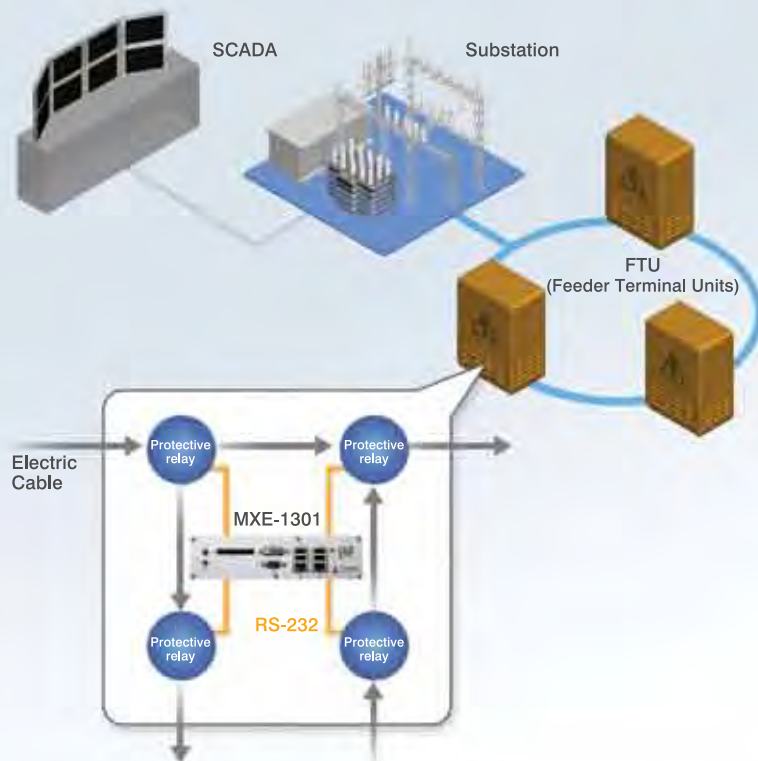

ADLINK Solution | Matrix MXE Series

The MXE-1301 delivers outstanding reliability in even harsh environments for dependable data concentration in FTUs. Two or four protective relays connect to the MXE-1301 through serial ports, as well as the data in the protective relays. Critical integrity information, such as “open” state of relays is collected by MXE-1301 and provided to the RTU in substations for transmission to the SCADA system.

The MXE-1300's compact and hardy construction, well able to sustain operations in temperature ranges as wide as -20°C to 70°C (-4°F to 158°F), is supported by fanless and cable-free design, effectively extending the MTBF while enhancing reliability of the system, thereby satisfying the most critical concerns of the application.


Power Transmission and Distribution Systems



Application

In power substations, voltage generated elsewhere is converted from high to low or the reverse using transformers. In the area of transmission, equipment is used as a data concentrator and in distribution, for supervision, monitoring and control.

Some supervisory functions performed in the substation, such as communication of relay status and circuit breakers to central administration via Ethernet and verification of circuit breaker states, must be performed even in the event of a short circuit, blackout or other contingency.

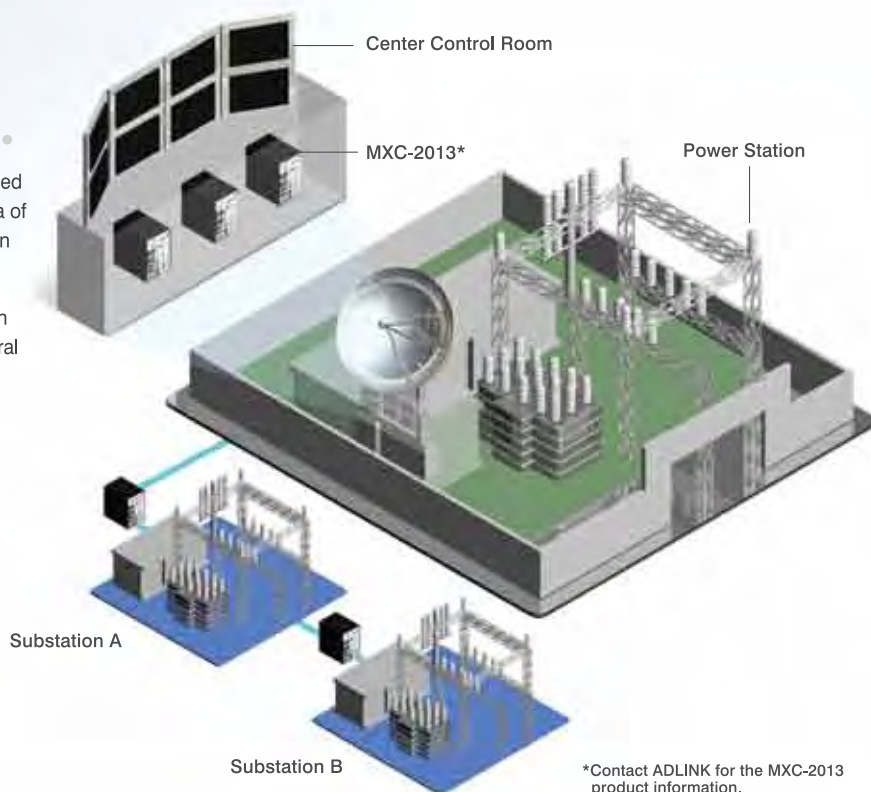

*Contact ADLINK for the MXC-2013 product information.

ADLINK Solution ■ Matrix MXC Series

The MXC-2000 provides guaranteed system stability and reliability when deployed in a power substation environment. The system design with one PCI and one PCIe slot offers maximum flexibility for system integration and expansion.

The wide input range of the AC/DC switching power supply meets the requirements of most power substation applications. Fanless, managed LANs, isolated DIO, dual power inputs, and rugged system housings all contribute to the MXC-2000's suitability for this type of application.

The MXC-2000 Series is further configurable for reliable operation in a -20°C to 70°C (-4°F to 158°F) operating temperature range, offering an optimal solution for applications subjected to harsh environments.)(Contact ADLINK for the MXC-2013 product information)

➤ Expandable Embedded Computers


State-of-the-art I/O Platform Controllers for Maritime Automation



Application

With the near-constant exchange of shipboard directives and responses taking place every day, precise information and communication are critical. To maximize efficiency of navigation and communication, and thereby profitability, focus on navigation automation control systems has increased dramatically.

Accordingly, ADLINK provides innovative and reliable machine-to-machine computer systems for maritime and offshore electronics. Integration of technology with acquired experience and expertise in measurement, automation, digital imaging, motion control and data acquisition into fanless embedded systems allows ADLINK to provide professional solutions and global services enabling customers to lead the field in maritime automation and intelligent transportation.

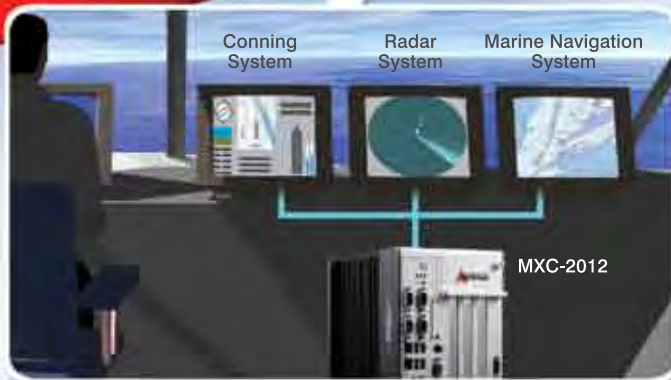

ADLINK Solution ■ Matrix MXC Series

ADLINK understands the importance of securing aft bridge control in offshore service vessels (OSV) to heighten navigational performance and increase vessel lifetime. Matrix expandable computers (MXC) from ADLINK satisfy all navigation requirements, alarm and power management issues, and thruster control challenges by focusing on a machine-to-machine system of control.

The Matrix MXC series provides a comprehensive line of products and services to streamline every aspect of command, control, and communications in an aft bridge workstation. The Matrix MXC series also complies with such maritime classifications as IEC-60945 and DNV (Det Norske Veritas) to fulfill application requirements.

➤ Expandable Embedded Computers

AOI with Expandable Fanless Embedded Computers



Application

Automated optical inspection (AOI) is an automated visual inspection of a wide range of products, such as PCBs, LCDs, wafer, and automotive parts. It is commonly used in manufacturing processes because it is a non-contact test method and used for inspecting parts that have limited and known variations. These inspection devices all have some common attributes that affect capability, accuracy, and reliability. AOI is able to perform most of the visual checks performed previously by manual operators far more quickly and accurately.

In light of the increasing demands for AOI, ADLINK developed the Matrix MXC series of fanless embedded computers to provide a robust solution with optimal inspection strategy in order to achieve the best possible defect coverage, which optimizes the production processes and lower your maintenance cost by extending the MTBF (mean time between failure) of the system with its fanless and cable-less design.



ADLINK Solution ■ Matrix MXC Series

The ADLINK Matrix MXC series is a configurable controller with fanless and cable-less design offers greater computing power for AOI applications. The MXC series features an Intel® processor to boost its performance with low power consumption. Leveraging a reliable fanless and durable cable-less design, the MXC series exhibits excellent dependability in harsh environments, where severe temperature variation and vibration may exist.

Featuring an expandable PCI and PCIe slots architecture, the MXC series provides the possibility to integrate off-the-shelf PCI/PCIe cards, such as ADLINK's PCIe frame grabbers and motion controllers. Combining ADLINK's comprehensive know-how and experience in industrial automation, the MXC series is the best choice for developing a rugged AOI application platform.

In addition, for some applications that required higher power consumption with PCI/PCIe cards installed, the MXC-4000 and 6000 series provides an optional hot-pluggable fan module for greater heat dissipation. This ingenious mechanical design features a cable-less structure which dramatically improves thermal stability while using PCI/PCIe cards.

» Integrated Embedded Computers

Multifunction Mobile Measurement Platform Deployed in Extreme Environments



Application

In factories or fabrication plants, mobile platforms in use require both processor performance and requisite I/O functions, but also reliability to provide long-term, dependable service despite the harshness of the environment.

In steel fabrication, molten metals are processed in ceramic-lined steel vessels. The ceramic lining wears, corrodes, and spalls with the intense heat generated by the iron process. A method is necessary to determine the thickness of the remaining ceramic lining, with the resulting information dictating replacement or repair, as required. The primary component utilized here is a 3D computer-controlled laser scanner.

These mobile platforms must be able to withstand the effects of continuous high temperatures, formidable levels of airborne particulate matter, and vibration generated by the process. Fan-cooling of the computers is ineffective, resulting in catastrophic failures of both hardware and software components.



ADLINK Solution | Matrix MXE Series

ADLINK's Matrix MXE series provides a highly reliable platform fully able to accomplish required tasks in severe environments presenting such conditions as high temperatures, concentrated airborne particulates, and continuous vibration, thanks to a fanless and cablefree design. It accommodates various x86 based processors to satisfy all kinds of computing requirements. With multiple I/O functions, merging the platform into the system is easily accomplished. The Matrix MXE Series represents a superior choice for reliable computing platform in severe environments.

The Future of Medication Management & Pharmacy Automation




Application

The medication management process is complex. When people are delivering thousands of doses to the patients every day, error and inefficiency are inevitable. In an effort to improve clinical efficiency and profitability, hospitals of every size are taking a closer look at medication management. Many have found that the traditional path that medication takes from the pharmaceutical distribution center to the pharmacy to the patient is both error-prone and inefficient, which potentially delays treatment, increases risk, drives up costs, and complicates efforts to meet regulatory requirements.

Yet in many hospitals, these long-standing challenges have turned out to be opportunities. Pharmacists, nurses and administrators across the country have found that automating the medication-use process not only helps solve these issues, it also can make a measurable improvement in clinical, operational, and financial results.

ADLINK is committed to help our customers develop a system together to break the harmful cycle of medication errors and simplifying medication management to bring safety and practice together in measurable ways. With proven capabilities including medication dispensing, order management, and point of care verification, we can positively impact patient safety across the entire continuum of care.

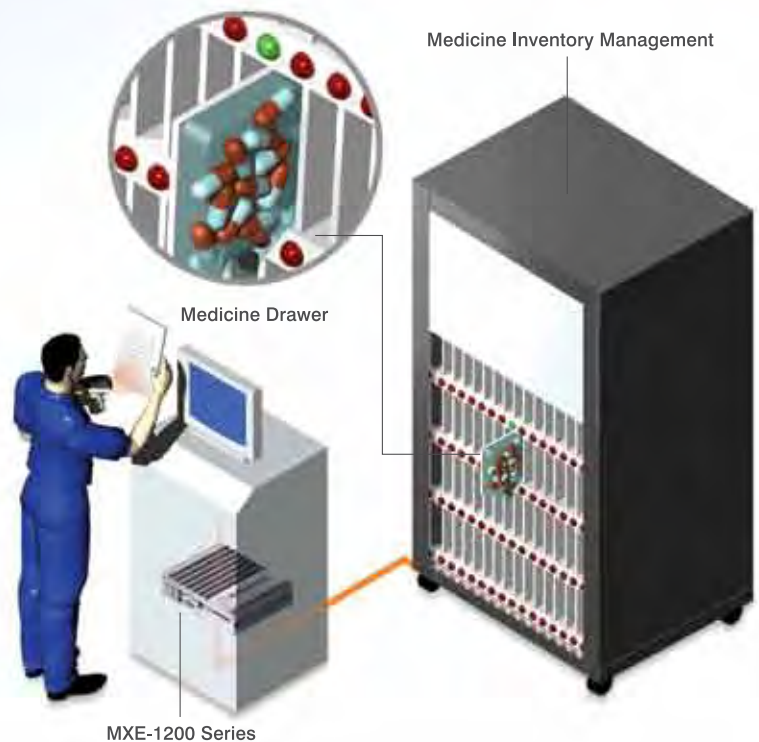

ADLINK Solution | Matrix MXE Series

The Matrix series of embedded computers from ADLINK addresses these medication management challenges by focusing on the security of the process of filling, delivering, and removing medications at an automated dispensing system.

The Matrix E series provides a comprehensive line of products and services to streamline every aspect of medication management facilities. The fanless and cable-less structure of the Matrix MXE-1200 series provides extensive durability for long-term use. The design of the system is extremely flexible to meet the needs of a wide variety of applications, including pharmacy management.

Selection Guide

Matrix MXC Series-Expandable Embedded Computers

	MXC-2000 Series			MXC-4000 Series	
					
Model Name	MXC-2002	MXC-2011	MXC-2012 (Maritime compliance)	MXC-4002D	MXC-4011D
System					
Processor	Intel® Atom™ N270 1.6 GHz			Intel® Atom™ D510 1.66 GHz	
Chipset	Intel® 945GSE+ ICH7-M			Intel® ICH8-M	
Memory	1 GB DDR2 533 MHz SODIMM module			1 GB DDR2 667 MHz SODIMM Module	
I/O Interface					
Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x1 slot	2 PCI slot and 1 PCIe x4 slots	2 PCI slots	1 PCI slot and 1 PCIe slot
Ethernet	2 GbE ports (Realtek® 8111C)			2 GbE ports (Intel® 82574L)	
Serial Port	COM1 & COM2	2 RS-232/422/485		2 RS-232/422/485	
	COM3 & COM4	2 RS-232		2 RS-232	
USB Port	4			4	
Watchdog Timer	√			√	
Storage					
SATA HDD	2.5" HDD/SSD installation			2.5" HDD/SSD installation	
CompactFlash	2 Type II CF sockets			1 Type II CF socket	
Environment					
Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/ industrial SSD)			Standard: 0°C to 50°C (32°F to 122°F) Extended option: -10°C to 60°C (-14°F to 140°F) (w/ industrial SSD)	
General					
Power Supply	9-32 V _{DC}		18-36 V isolation DC input	9-32 V _{DC}	
Page No.	11-11			11-9	

	MXC-6000 Series		MXC-6300/6310 Series	
			   	
Model Name	MXC-6101D	MXC-6201D	MXC-6301D/6302D/6303D	MXC-6311D/6312D/6313D
System				
Processor	Intel® Core™ i7-620LE 2.0 GHz		Intel® Core™ i7-3610QE/ i5-3610ME/i3-3120ME	Intel® Core™ i7-3610QE/ i5-3610ME/i3-3120ME
Chipset	Intel® QM57		Intel® QM77	
Memory	2 GB DDR3 800/1066 MHz SODIMM module		4 GB DDR3 1600 MHz SODIMM module	
I/O Interface				
Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x4 slot	1 PCI +2 PCIe x8 slots or 1 PCI + 1 PCIe x16	1 PCI + 1 PCIe x16
Ethernet	2 GbE ports (2 Intel® 82574L)		2 Intel GbE ports with teaming function, Intel iAMT 8.0	
Serial Port	COM1 & COM2	2 RS-232/422/485	2 RS-232/422/485	
	COM3 & COM4	2 RS-232	2 RS-232	
USB Port	4 (external), 1 (internal)		6 external USB ports (4 USB 3.0 + 2 USB 2.0) + 1 internal USB 2.0	
Watchdog Timer	√		√	
Storage				
SATA HDD	2.5" HDD/SSD installation		2.5" HDD/SSD installation	
CompactFlash	1 external Type II CF socket, 1 internal Type II CF socket		2 CFast socket (1 external + 1 internal)	
Environment				
Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -10°C to 60°C (-14°F to 140°F) (w/ industrial SSD)		Standard: 0°C to 50°C (32°F to 122°F) Extended Temperature: -20°C to 55°C (-4°F to 131°F) (w/Ind. SSD or CFast) for MXC-6301D/6311D; -20°C to 60°C (-4°F to 140°F) (w/Ind. SSD or CFast) for MXC-6302D/6303D/6312D/6313D	
General				
Power Supply	9-32 V _{DC}		9-32 V _{DC}	
Page No.	11-7		11-5	

*Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

Selection Guide

Matrix MXE Series-Integrated Embedded Computers

		MXE-I 000 Series			MXE-I 200 Series		MXE-I 300 Series	
								
Model Name		MXE-1005	MXE-1010	MXE-1020	MXE-1212/232, MXE-1212/422, MXE-1212/485		MXE-1301/1302	MXE-1311/1312
System								
Processor		Intel® Atom™ N270 1.6 GHz			Intel® Atom™ N270 1.6 GHz		Intel® Atom™ D2550 1.86 GHz/N2600 1.6 GHz	
Chipset		Intel® 945GSE+ ICH7-M			Intel® 945GSE+ ICH7-M		Intel® NM10	
Memory		1 GB DDR2 533 MHz SODIMM module			1 GB DDR2 533 MHz SODIMM module		2 GB DDR3 1066/800 MHz SODIMM module	
I/O Interface								
Ethernet		1 GbE port (Realtek® 8111C)	3 GbE ports (Realtek® 8111C+Intel® 82574) (support teaming function)	1 GbE port (Realtek® 8111C)	1 GbE port (Realtek® 8111C)		3 GbE ports (3x Intel® 82574L)	
Serial Port	COM1 & COM2	2 RS-232/422/485			2 RS-232/422/485 by DB9 connectors		2 RS-232/422/485	
	COM3 & COM4	2 RS-232			2 RS-232 by DB9 connectors		2 RS-232	
	COM5 - COM12	-			8 RS-232/422/485 by DB62 connector		-	
USB Port		4			4		6	
Watchdog Timer		√			√		√	
Storage								
SATA HDD		2.5" HDD/SSD installation			2.5" HDD/SSD installation		2.5" HDD/SSD installation	3.5" HDD installation
CompactFlash		1 Type I CF socke			1 Type II CF socket		1 Type I CF socket	
Environment								
Operating Temperature*		Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/ industrial SSD)			Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/ industrial SSD)		Standard: 0°C to 50°C (32°F to 122°F) Extended temperature: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD or CF)	
General								
Power Supply		6-36 V _{DC}			6-36 V _{DC}		6-36 V _{DC}	9-36 V _{DC}
Page No.		11-23			11-21		11-19	

		MXE-3000 Series		MXE-5000 Series		MXE-5300/5310 Series			
									
Model Name		MXE-3002	MXE-5104M	MXE-5104 (Maritime compliance)	MXE-5301/5302/5303	MXE-5311/5312/5313			
System									
Processor		Intel® Atom™ D510 1.66 GHz		Intel® Core™2 Duo P8400 2.26 GHz		Intel® Core™ i7-2710QE / i5-2510E / i3-2330E		Intel® Core™ i7-2710Q E / i5-2510E / i3-2330E	
Chipset		Intel® ICH8-M		Intel® GM45+ ICH9-M		Intel® QM67			
Memory		1 GB DDR2 667 MHz SODIMM module		2 GB DDR3 SODIMM		4 GB DDR3 1066 MHz SODIMM module			
I/O Interface									
Ethernet		3 GbE ports(1 Realtek® 8111C + 2 Intel® 82574L)		4 GbE ports (2 Intel® 82574L + 2 Realtek® 8111C)		4 GbE ports (2 Realtek® 8111C + 1 Intel® 82574IT + 1 82579 LM)			
Serial Port	COM1 & COM2	2 RS-232/422/485		2 RS-232		2 RS-232/422/485			
	COM3 & COM4	2 RS-232		2 RS-232/422/485		2 RS-232			
	COM5 - COM12	-		-		-			
USB Port		6		6		4 (USB 2.0) & 2 (USB 3.0)			
Watchdog Timer		√		√		√			
Storage									
SATA HDD		2.5" HDD/SSD installation		2.5" HDD/SSD installation		2.5" HDD/SSD installation		One 2.5" HDD/SSD + one 3.5" HDD installation	
CompactFlash		1 Type II CF socket		-		1 CFast socket			
Environment									
Operating Temperature*		Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/ industrial SSD)		Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)		Standard: 0°C to 50°C (32°F to 122°F) Extended option: MXE-5301:-20°C to 60°C (-4°F to 140°F) ; MXE-5302/5303:-20°C to 70°C (-4°F to 158°F) (w/industrial SSD or CFast)			
General									
Power Supply		9-32 V _{DC}		9-24 V _{DC}		24V isolation DC input		9-32 V _{DC}	
Page No.		11-7		11-15		11-13		11-13	

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

MXC-6300/6310 Series

High Performance 3rd Generation Intel® Core™ i7/i5/i3 Processor-based
Fanless Expandable Embedded Computer with PCI/PCIe (Gen2) Slots



Introduction

The Matrix MXC-6300/6310 series is a high-performance fanless embedded computer integrating a 3rd generation Intel® Core™ i7/ i5/i3 processor and QM77 chipset to provide powerful computing and superior graphic performance. Graphic-intensive and computing-oriented applications including image and vision measurement, machine automation, maritime automation, surveillance and high-resolution medical imaging all benefit.

Increased PCI & PCI express (Gen2) expansion slots allow installation of a variety of PCI, PCIe x8 or PCIe x16 add-on cards, meeting the needs of application platform development environments. In addition, the MXC-6300/6310 series offers 2 DisplayPort and one DVI-I port for three independent display support connections, four USB 3.0 and two USB 2.0 ports, and 2 GbE LAN ports with teaming function. The two 2.5" onboard SATA III ports with high speed SATA 6 Gb/s and RAID 0, 1 ensure all data in the RAID array is fully backed up. Built-in 16 CH isolated DIO provides overall industrial control.

Delivering high quality, durable and compact construction, the MXC-6300/6310 series leverages a reliable fanless and cable-free configuration, optimal thermal dissipation, and easy installation for flexible and user-friendly system development and application implementation in harsh environments.

Features

- Supports 3rd generation Intel® Core™ i7/i5/i3 processor + QM77 chipset
- 2 x DDR3 SO-DIMM socket, supporting up to 16 GB memory
- 1 PCI + 2 PCIe x8 slots or 1 PCI + 1 PCIe x16 for MXC-6300 series; 1 PCI + 1 PCIe x16 for MXC-6310 series, supporting PCIe Gen2
- 3 independent display capability with onboard 2 DisplayPort + 1 DVI-I
- 6 external USB ports (4 USB 3.0 + 2 USB 2.0) + 1 internal USB 2.0
- 2 Intel® GbE ports with teaming function, Intel® iAMT 8.0
- 2 CFast sockets, onboard SATA III for 2 x 2.5" HDD/SSD installation, SATA 6Gb/s and RAID 0, 1 support
- Built-in 9 V_{DC} to 32 V_{DC} wide-range DC power input
- Rugged, up to -20°C to 60°C (-4°F to 140°F) fanless operation (w/ industrial SSD)

Applications

- Factory Automation / Machine Vision
- Intelligent Transportation Systems / Surveillance
- Maritime Automation
- High Resolution Medical Imaging


Software Support

OS Information


- Windows® 7/Embedded standard 7/XP/XP Embedded
- Linux
- *Linux Distribution by Request

Easy-to-install Optional Fan Module

■ MXC-6300 Series Front Panel

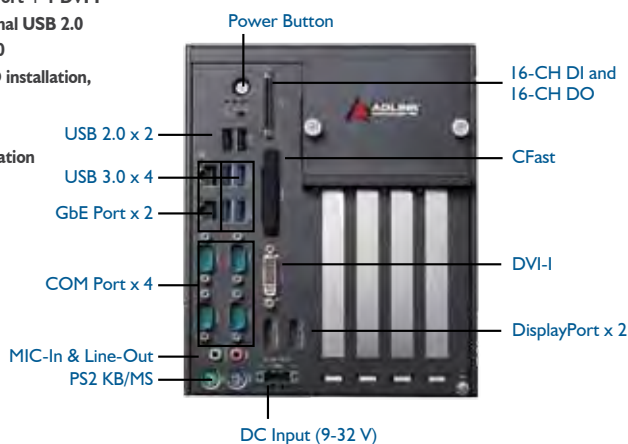

■ Inside of the MXC-6300 Series

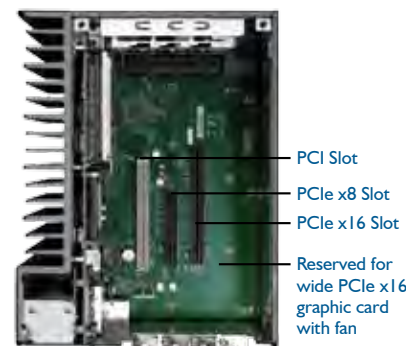

*Recommended expansion slot configuration options for MXC-6300 (not applicable for MXC-6310):

- 1 x PCI card + 1 x PCIe x16, with PCIe x8 slot empty
- OR
- 1 x PCI card + 1 x PCIe x8 (in PCIe x8 slot) + 1 x PCIe x8 (in PCIe x16 slot)

For best results, other configurations are not recommended



1. Undo the thumbscrews by hand



2. Withdraw the thumbscrew and remove the top cover



3. Seat the fan module cover and slide into place, the fan connects automatically

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

Model Name	MXC-6301D/6311D	MXC-6302D/6312D	MXC-6303D/6313D
System Core			
■ Processor	Intel® Core™ i7-3610QE, 2.3 GHz, 6M cache (Max Turbo 3.3 GHz)	Intel® Core™ i5-3610ME, 2.7 GHz, 3 M cache (Max Turbo up to 3.3 GHz)	Intel® Core™ i3-3120ME, 2.4 GHz, 3 M cache
■ Chipset	Intel® Mobile Platform Controller Hub (QM77)		
■ Video	Three independent display capability (2 DisplayPort + 1 VGA or 2 DisplayPort + 1 DVI-D) 1st DP: up to 2560x1600 / 2nd DP: up to 1920x1600 / DVI-I port: up to 1920x1200		
■ Memory	4 GB DDR3 1600 MHz SODIMM module (Max. capacity 16 GB with 2 SODIMM socket option)		
I/O Interface			
■ Expansion Slots	1 PCI + 2 PCIe x8 slots or 1 PCI + 1 PCIe x16 (MXC-6300 series), supporting PCIe Gen2 1 PCI + 1 PCIe x16 (MXC-6310 series), supporting PCIe Gen2		
■ Ethernet	2 Intel® GbE ports (1 Intel® Springville WGI210IT + 1 82579LM) Support Teaming function, Intel iAMT 8.0, Wake On LAN		
■ Serial Ports	2 software-programmable RS-232/422/485 (COM 1&2) with autoflow control, 2 RS-232 (COM 3&4)		
■ USB	6 external USB ports (4 USB 3.0 + 2 USB 2.0) + 1 internal USB 2.0		
■ DIO	16-CH DI and 16-CH DO with 1.5KV isolation		
■ Audio	1 MIC-in and 1 Line-out		
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse		
■ WDT	Supports a watchdog timer		
Power Supply			
■ DC Input	Built-in 9-32 V _{DC} wide-range DC input pluggable connectors with latch (GND, V-, V+), 2-pin remote power on/off switch		
■ AC Input	Optional 160 W external AC-DC adapter for AC input		
Storage Device			
■ SATA HDD	2 onboard SATA-III for 2.5" HDD/SSD installation, SATA RAID 0,1 & SATA 6 Gb/s support		
■ CompactFlash	2 CFast socket (1 external + 1 internal)		
Mechanical			
■ Optional Fan Module	Optional fan module for dissipating heat generated by PCI/PCIe card, Smart fan control		
■ Dimensions	MXC-6300 series: 172.5 (W) x 225 (D) x 213 (H) mm (6.9" x 9" x 8.52"); MXC-6310 series: 154 (W) x 225 (D) x 213 (H) mm (6.16" x 9" x 8.52")		
■ Weight	MXC-6300 series: 4.3 kg (9.5 lbs); MXC-6310 series: 3.8kg (8.39 lbs)		
■ Mounting	Wall-mount kit		
Environmental			
■ Operating Temperature	Standard: 0°C to 50°C (32°F to 122°F) Extended Temperature: -20°C to 55°C (-4°F to 131°F) (w/industrial SSD or CFast) for MXC-6301D/6311D -20°C to 60°C (-4°F to 140°F) (w/industrial SSD or CFast) for MXC-6302D/6303D/6312D/6313D		
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SDD/CFast)		
■ Humidity	~95% @ 40°C (104°F) (non-condensing)		
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CFast or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)		
■ ESD	Contact +/-4 KV and Air +/-8 KV		
■ Shock	Operating, 50 G, half sine 11 ms duration (w/ CFast or SSD)		
■ EMC	CE and FCC Class A		

Ordering Information

Model Name	Description	Expansion Slots	Memory	DIO
MXC-6301D	Intel® Core™ i7-3610QE fanless computer	1 PCI + 2 PCIe x8 slots or 1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO
MXC-6302D	Intel® Core™ i5-3610ME fanless computer	1 PCI + 2 PCIe x8 slots or 1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO
MXC-6303D	Intel® Core™ i3-3120ME fanless computer	1 PCI + 2 PCIe x8 slots or 1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO
MXC-6311D	Intel® Core™ i7-3610QE fanless computer	1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO
MXC-6312D	Intel® Core™ i5-3610ME fanless computer	1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO
MXC-6313D	Intel® Core™ i3-3120ME fanless computer	1 PCI + 1 PCIe x16	4 GB DDR	16 DI + 16 DO

Optional Accessories

MXC-6300 Optional Fan Module	Fan module for MXC-6300 series
8/16 GB DDR3 Upgrade	Upgrade to 8/16 GB DDR3 Memory
320/500 GB HDD Option	Factory-installed 320/500 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
8/16 GB CFast Option	Factory-installed 8/16 GB industrial CFast (-40°C to 85°C, -40°F to 185°F)
32/64 GB SSD Option	Factory-installed 32/64 GB MLC SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
160 W AC-DC Adapter	160 W industrial grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional screening service to extend the operating temperature to -20°C to 55°C (-4°F to 131°F) for MXC-6301D/6311D; -20°C to 60°C (-4°F to 140°F) for MXC-6302D/6303D/6312D/6313D

MXC-6000 Series

Powerful Intel® Core™ i7 Processor-based Fanless Expandable Embedded Computer with PCI/PCIe Slots



Introduction

The Matrix MXC-6000 series of powerful fanless, expandable embedded computers feature the new Intel® Core i7 2.0 GHz processor for maximized computing. The MXC-6000 inherits its exceptional fanless and cable-free design from ADLINK's existing Matrix C series.

The MXC-6000 series' Intel® Core i7 2.0 GHz processor and Intel® QM57 chipset deliver a level of performance ideal for image and vision measurement and automation applications. PCI and PCIe slots allow integration of off-the-shelf PCI/PCIe cards for development of configurable application platforms. 16 built-in isolated DIO channels enable standardized industrial control. A DVI-I connector output on the front panel allows direct connection to a LCD panel, and one eSATA port supports storage expansion or hot-swapping SATA drives.

Leveraging a reliable fanless and durable cable-free design, the MXC-6000 series exhibits excellent dependability in harsh environments, where severe temperature variation and vibration may exist. The MXC-6000 series provides an optional hot-pluggable fan module to dissipate heat generated within the system when high power consumption PCI/PCIe cards are installed. This inventive mechanical design retains a cable-free structure which dramatically improves thermal stability when PCI/PCIe cards are installed.

The MXC-6000 also provides an USB 2.0 port internally located on a riser card, enabling heightened reliability for secure applications, with license keys or password encryption on an internal USB dongle dramatically improve system security. Combining a reliable design with more computing power and innovative features, the Matrix MXC-6000 series is the optimal choice on which to base any rugged application system.

Combining a reliable design with more computing power and innovative features, the Matrix MXC-6000 series is the optimal choice on which to base any rugged application system.

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance

Features

- Intel® Core i7-620LE 2.0 GHz processor + Intel® QM57 chipset
- Configurable, providing PCI and PCIe x4 slots
- Rugged, -10°C to 60°C (-14°F to 140°F) fanless operation*
- Built-in 9 Vdc to 32 Vdc wide-range DC power input
- VGA+DVI-D display by DVI-I connector
- Dual 1000/100/10 Mbps Ethernet ports, 2 RS-232 ports and 2 software-selectable RS-232/422/485 ports
- USB 2.0 port internally on riser card, built-in 16-CH isolated DI and 16-CH isolated DO
- RAID 0, 1 function available through 2 internal SATA-connected HDD or one internal SATA-connected HDD and one external eSATA-connected HDD

Applications

- Machine Automation / Factory Automation
- Image & Vision Measurement
- Test Instrumentation
- Safety Surveillance

Software Support

OS Information

- Windows® XP/XP Embedded/7
- Linux*
- INtime*

*Linux Distribution by Request
Custom BIOS is necessary to support INtime

Easy-to-install Hot-pluggable Fan Module



1. Undo the thumbscrew by hand



2. Withdraw the thumbscrew and remove the top cover




3. Replace it by plugging the hot-pluggable fan module cover into the fan connector on CPU board

A More Reliable Design of Internal USB Port




The Matrix internal USB 2.0 port provides increased application security with connectivity for license keys or password encryption on USB dongle.

MXC-6000 Series Front Panel

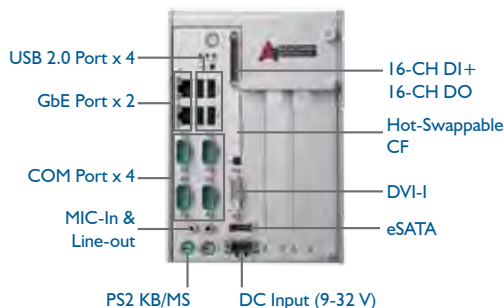

Inside of the MXC-6000 Series

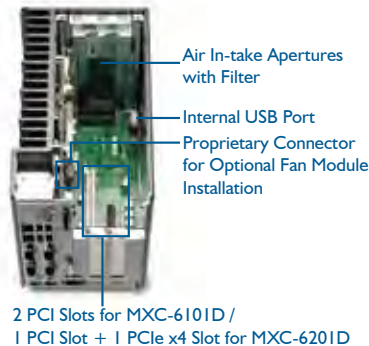

Specifications

Model Name	MXC-6101D		MXC-6201D
System Core			
■ Processor	Intel® Core i7-620LE 2.0 GHz CPU		
■ Chipset	Intel® QM57		
■ Video	VGA+DVI display by DVI-I connector • Analog CRT, supports QXGA (2048 x 1536) resolution • DVI-I 1.0 (DVI + VGA) (with external cable for connecting DVI-I connector to DVI-D and VGA device) • Optional 48-bit LVDS (by Internal box header)		
■ Memory	2 GB DDR3 800/1066 MHz SODIMM module (Max. capacity 4GB SODIMM module option)		
I/O Interface			
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x4 slot	
■ Ethernet	2 GbE ports (2 Intel® 82574L)		
■ Serial Port	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)		
■ USB	4 USB 2.0 ports (external), 1 USB 2.0 port (internal)		
■ Audio	1 mic-in and 1 line-out		
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse		
■ DIO	16-CH isolated DI + 16-CH isolated DO		
■ WDT	Supports a watchdog timer		
Power Supply			
■ DC Input	AT/ATX, built-in 9-32 Vdc wide-range DC power input 3P pluggable connector with latch (GND, V-, V+)		
■ AC Input	Optional 100 W external AC-DC adapter for AC input		
Storage Device			
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation Support SATA RAID 0, 1		
■ CompactFlash	1 external type II CompactFlash socket 1 internal type II CompactFlash socket		
■ eSATA	1 eSATA interface connector for external storage expansion		
Mechanical			
■ Optional Fan Module	Optional hot-pluggable fan module for dissipating heat generated by PCI/PCIe card		
■ Dimensions	130 mm (W) x 225 mm (D) x 183 mm (H) (5.1" x 8.9" x 7.2")		
■ Weight	3.5 kg (7.72 lbs)		
■ Mounting	Wall-mount kit		
Environmental			
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -10°C to 60°C (-14°F to 140°F) (w/industrial SSD)		
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)		
■ Humidity	~95% @ 40°C (104°F) (non-condensing)		
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)		
■ Shock	Operating, 50 G, Half sine 11 ms duration (w/ CF or SSD)		
■ EMC	CE and FCC Class A		

*Without PCI/PCIe card installation.

Ordering Information

Model Name	Description	PCI	PCIe x4	GbE	eSATA	COM	USB	Memory	DIO
MXC-6101D	Intel® Core i7-620LE 2.0 GHz fanless expandable embedded computer	2	0	2	1	4	5	2 GB DDR3	16 DI + 16 DO
MXC-6201D	Intel® Core i7-620LE 2.0 GHz fanless expandable embedded computer	1	1	2	1	4	5	2 GB DDR3	16 DI + 16 DO

Optional Accessories

MXC-6000 Optional Fan Module	Hot-pluggable fan module for the MXC-6000 series
4 GB DDR3 upgrade	Upgrade to 4 GB DDR3 memory
320 GB HDD option	Factory-installed SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB industrial SSD option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
100 W AC-DC adapter	100 W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
DVI-I to VGA&DVI-D cable	External cable for connecting DVI-I to DVI-D and VGA devices
Auxiliary power cable	Auxiliary power cable for providing PCI and PCIe card external power suppliers
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-6000 series to -10°C to 60°C (-14°F to 140°F)

MXC-4000 Series

Intel® Atom™ Dual-Core Processor-based Fanless Expandable Embedded Computer with PCI/PCIe Slots



Introduction

The Matrix MXC-4000 series is a fanless, expandable embedded computer based on the Intel® Atom™ D510 dual-core processor to offer greater computing power for your applications. The MXC-4000 inherits its exceptional fanless and cable-less design from existing Matrix C series, with the addition of innovative features, such as an eSATA interface, a LVDS output, and a hot-pluggable fan option.

The MXC-4000 series features an Intel® Atom™ D510 dual-core 1.66 GHz processor to boost its performance to almost twice that of the Atom™ N270 platform, while maintaining the same overall power consumption. Its PCI and PCIe slots give you the possibility to integrate off-the-shelf PCI/PCIe cards and develop a configurable application platform. Built-in isolated DIO channels are provided for general industrial control. Its LVDS output on the front panel allows you to directly connect to a LCD panel. The MXC-4000 series also provides two eSATA ports to enable the capability of either expanding storage capacity or using hot-swappable SATA drives.

Leveraging a reliable fanless and durable cable-less design, the MXC-4000 series exhibits excellent dependability in harsh environments, where severe temperature variation and vibration may exist. The MXC-4000 series provides an optional hot-pluggable fan module to dissipate heat generated within the system when high power consumption PCI/PCIe cards are installed. This ingenious mechanical design retains a cable-less structure which dramatically improves thermal stability when PCI/PCIe cards installed.

Combining a reliable design with more computing power and innovative features, the Matrix MXC-4000 series is the optimal choice to base your rugged application system on.

Features

- Intel® Atom™ D510 1.66 GHz processor + ICH8-M chipset
- Configurable, providing PCI and PCIe slots
- Rugged, -10°C to 60°C (-14°F to 140°F) fanless operation*
- Built-in 9 Vdc to 32 Vdc wide-range DC power input
- VGA + LVDS independent dual display
- Dual 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two software-selectable RS-232/422/485 ports
- Two eSATA ports for storage expansion
- Built-in 12-CH isolated DI and 12-CH isolated DO

Applications

- Machine Automation
- Intelligent Transportation
- Factory Control
- Test Instrumentation
- Safety Surveillance
- Building Automation

Software Support


OS Information

- Windows® XP/XP Embedded/7
- Linux*

*Linux Distribution by Request

Easy-to-install Hot-pluggable Fan Module

■ MXC-4000 Series Front Panel

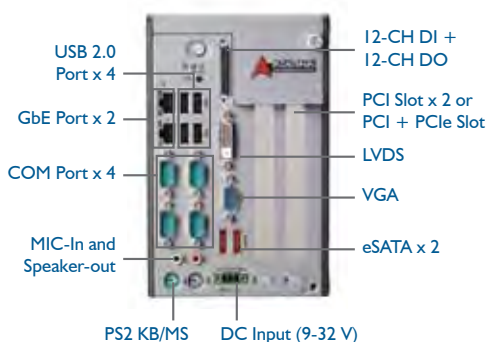

■ Inside of the MXC-4000 Series



1. Undo the thumbscrew by hand



2. Withdraw the thumbscrew and remove the top cover



3. Replace it by plugging the hot-pluggable fan module cover into the fan connector on CPU board

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

Specifications

Model Name	MXC-4002D		MXC-4011D
System Core			
■ Processor	Intel® Atom™ D510 1.66 GHz Dual-Core CPU		
■ Chipset	Intel® I/O Control Hub 8 Mobile (ICH8-M)		
■ Video	Analog CRT, supports QXGA (2048 X 1536) resolution 18-bit LVDS output by DVI-D connector for LCD panel		
■ Memory	1 GB DD2 667 MHz SODIMM module		
I/O Interface			
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x1 slot	
■ Ethernet	2 GbE ports (Intel® 82574L)		
■ DIO	12-CH isolated DI + 12-CH isolated DO		
■ Serial Port	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)		
■ USB	4 USB 2.0 ports		
■ Audio	1 mic-in and 1 line-out		
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse		
■ WDT	Supports a watchdog timer		
Power Supply			
■ DC Input	Built-in 9-32 Vdc wide-range DC input with over-voltage protection 3P pluggable connector with latch (GND, V-, V+)		
■ AC Input	Optional 60 W external AC-DC adapter for AC input		
Storage Device			
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation		
■ eSATA	2 eSATA interface connectors for external storage expansion		
■ CompactFlash	1 type II CF socket, supporting PIO and DMA modes for HDD replacement		
Mechanical			
■ Optional Fan Module	Optional, hot-pluggable fan module for dissipating heat generated by PCI/PCIe card		
■ Dimensions	118 mm (W) x 219 mm (D) x 183 mm (H) (4.6" x 8.6" x 7.2")		
■ Weight	2.8 kg (6.17 lbs)		
■ Mounting	Wall-mount kit		
Environmental			
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -10°C to 60°C (-14°F to 140°F) (w/industrial SSD)		
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)		
■ Humidity	~95% @ 40°C (104°F) (non-condensing)		
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)		
■ Shock	Operating, 50 G, half sine 11 ms duration (w/ CF or SSD)		
■ EMC	CE and FCC Class A		

*Without PCI/PCIe card installation

Ordering Information

Model Name	Description	PCI	PCIe x1	GbE	eSATA	COM	USB	Memory	DIO
MXC-4002D	Intel® Atom™ D510 fanless expandable embedded computer	2	0	2	2	4	4	1 GB DDR2	12 DI+12 DO
MXC-4011D	Intel® Atom™ D510 fanless expandable embedded computer	1	1	2	2	4	4	1 GB DDR2	12 DI+12 DO

Optional Accessories

MXC-4000 Optional Fan Module	Hot-pluggable fan module for the MXC-4000 series
2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
80 W AC-DC Adapter	80 W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-4000 series to -10°C to 60°C (-14°F to 140°F)

MXC-2000 Series

Intel® Atom™ Processor-based Fanless Expandable Embedded Computer with PCI/PCle Slots



MXC-2002/2011



MXC-2012

Introduction

ADLINK's MXC-2000 series is an exceptionally fanless expandable embedded computer with configurable PCI and PCIe slots. It is designed to provide a reliable platform for a wide variety of applications by accepting standard PCI and PCIe cards. The MXC-2000 series can operate in a -20 to 70°C (-4 to 158°F) temperature range and withstands 5 Grms vibration. Its fanless and cable-less structure provides additional durability for long-term usage.

The MXC-2000 series features the Intel® Atom™ N270 1.6 GHz processor to deliver adequate performance at low power. Its PCI and PCIe slots enable the possibility of integrating off-the-shelf PCI/PCle cards for a configurable application platform. Generic I/O interfaces, such as Gigabit Ethernet, COM, and USB are provided for connecting devices, while VGA + S-Video dual graphic outputs to allow connections to larger displays such as an LCD TV. The MXC-2000 series also integrates ADLINK in-house DIO design to deliver optional isolated DIO channels for industrial control usage.

ADLINK's MXC-2000 series is the perfect combination of configurability, reliability, durability, and compactness. With the MXC-2000 series, creating your rugged application system has never been easier.

Features

- Intel® Atom™ N270 1.6 GHz processor + 945GSE chipset
- Configurable, providing both PCI and PCIe slots options
 - 2 PCI Slots for MXC-2002
 - 1 PCI Slot + 1 PCIe x1 Slot for MXC-2011
 - 2 PCI Slot + 1 PCIe x4 Slot for MXC-2012
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Built-in wide-range DC power input
 - 9 V_{DC} to 32 V_{DC} for MXC-2002 and MXC-2011
 - 18 V_{DC} to 36 V_{DC} for MXC-2012
- Dual 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two RS-232/422/485 ports
- Two CF sockets for HDD replacement and hot-swappable data storage
- VGA + S-Video independent dual display outputs
- Optional on-board 16-CH isolated DI and 16-CH isolated DO (MXC-2012)
- IEC-60945 maritime standards compliance (MXC-2012)

Applications


- Industrial Automation
- Factory Control
- Test Instrumentation
- Security Surveillance
- Data Acquisition System
- Building Automation
- Maritime Computer (MXC-2012)

Software Support


OS Information

- Windows® CE6.0/XP/XP Embedded/7
- Linux*

*Linux Distribution by Request

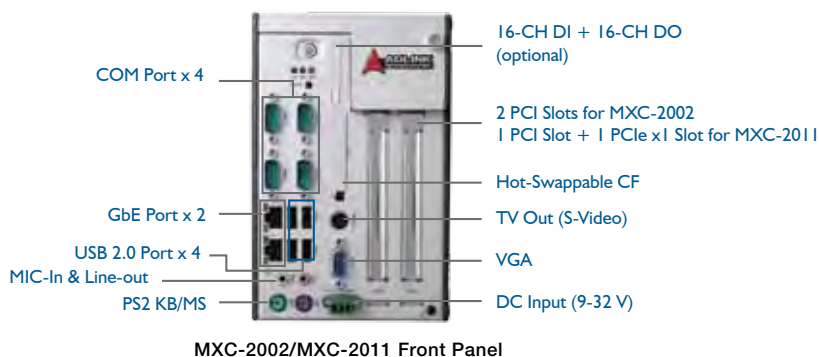

MXC-2002/MXC-2011 Front Panel

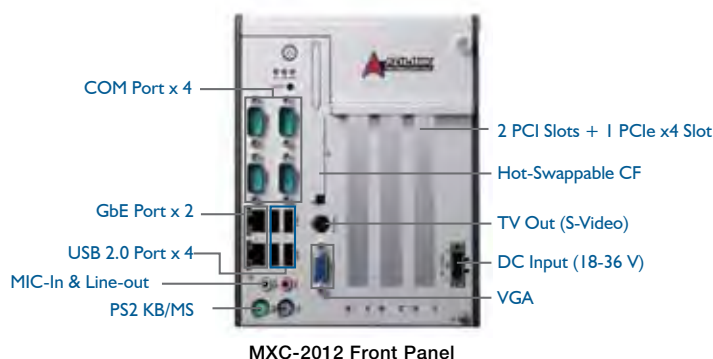

MXC-2012 Front Panel



Easy Installation for HDD and PCI/PCle Cards

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCle cards may affect thermal performance.

Specifications

Model Name	MXC-2002		MXC-2011	MXC-2012
System Core				
■ Processor	Intel® Atom™ N270 1.6 GHz CPU			
■ Chipset	Intel® 945GSE Graphic Memory Control Hub Intel® I/O Controller Hub 7 Mobile (ICH7-M)			
■ Video	Analog CRT, supports QXGA (2048 x 1536) resolution TV-out, supports s-video			
■ Memory	1 GB DDR2 533 MHz SODIMM module			
I/O Interface				
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x1 slot	2 PCI slots and 1 PCIe x4 slot	
■ Ethernet	2 GbE ports (Realtek® 8111C)			
■ Serial Port	2 RS-232/422/485 (jumper selectable, COM1 & COM2) 2 RS-232 (COM3 & COM4)			
■ USB	4 USB 2.0 ports			
■ Audio	1 mic-in and 1 line-out			
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse			
■ DIO	Optional 16-CH isolated DI + 16-CH isolated DO			
■ WDT	Supports a watchdog timer			
Power Supply				
■ DC Input	Built-in 9-32 Vdc input with over-voltage protection 3P pluggable connector with latch (GND, V-, V+)		Built-in 18-36 Vdc isolation DC input	
■ AC Input	Optional 60 W external AC-DC adapter for AC input		Optional 100 W external AC-DC adapter for AC input	
Storage Device				
■ SATA HDD	Onboard SATA port for 2.5" HDD/SSD			
■ CompactFlash	2 type II CF sockets, supporting PIO and DMA modes CF1 (internal) for HDD replacement CF2 (external) supports hot-swapping			
Mechanical				
■ Dimensions	118 mm (W) x 219 mm (D) x 183 mm (H) (4.6" x 8.6" x 7.2")		150 mm (W) x 219 mm (D) x 183 mm (H) (5.9" x 8.6" x 7.2")	
■ Weight	2.8 kg (6.17 lbs)		3.1 kg (6.83 lbs)	
■ Mounting	Wall-mount kit			
Environmental				
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)			
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excluding HDD/SSD/CF)			
■ Humidity	~95% @ 40°C (104°F) (non-condensing)			
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/CF or SSD) Operating, 0.7 Grms, 5-500 Hz, 3 axes (w/HDD)			
■ Shock	Operating, 50 G, half-sine 11 ms duration (w/CF or SSD)			
■ EMC	CE and FCC Class A		CE, FCC Class A IEC-60945 Compliance	

Ordering Information

Model Name	Description	PCI	PCIe x1	PCIe x4	GbE	COM	USB	Memory	DIO	IEC-60945
MXC-2002	Intel® Atom™ N270 fanless expandable embedded computer	2	0	-	2	4	4	1 GB DDR2	-	-
MXC-2002D	Intel® Atom™ N270 fanless expandable embedded computer	2	0	-	2	4	4	1 GB DDR2	16 DI+16 DO	-
MXC-2011	Intel® Atom™ N270 fanless expandable embedded computer	1	1	-	2	4	4	1 GB DDR2	-	-
MXC-2011D	Intel® Atom™ N270 fanless expandable embedded computer	1	1	-	2	4	4	1 GB DDR2	16 DI+16 DO	-
MXC-2012	Intel® Atom™ N270 fanless expandable embedded computer	2	0	1	2	4	4	1 GB DDR2	-	v

Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
60 W AC Adapter	60 W industrial-grade AC adapter (-20°C to 70°C, -4°F to 158°F)
100 W AC Adapter	100 W industrial-grade AC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-2000 series to -20°C to 70°C (-4°F to 158°F)

MXE-5300/5310 Series

Powerful 2nd Generation Intel® Core™ i7 Processor-based Fanless Embedded Computer with High Performance Wireless Support



MXE-5300 Series



MXE-5310



Introduction

The Matrix MXE-5300/5310 series is the latest addition to ADLINK's Matrix E series, based on the Intel® Core™ i7-2710QE quad-core processor, boosting performance by almost 150% with minimal increase in power consumption, and offering outstanding computing power tailored to a variety of specific application needs.

Featuring a new design simplifying system component replacement and maintenance, the MXE-5300/5310 series allows effortless access to storage, memory, and wireless modules. Leveraging proprietary mechanical engineering, the MXE-5300 series also retains all the popular features of the Matrix E series, including rugged -20 to 70°C (-4 to 158°F) fanless operation, 5 Grms vibration resistance, and 9-32V wide range DC input.


In addition, the MXE-5300/5310 series provides dual mini-PCIe sockets and a USIM socket supporting wireless protocols such as 3G, GPS, WiFi and Bluetooth. ADLINK's proprietary wireless enhancement technology empowers the MXE-5300/5310 series to deliver industrial-grade wireless performance.

The MXE-5300/5310 series accommodates Intel® Active Management 7.0, for remote system management, enabling users to easily perform maintenance, diagnostic, update, and even BIOS configuration tasks on the MXE-5300/5310 series via Ethernet connection.


Combining superior processor performance, innovative mechanical design, superior wireless capability, and rich IO, all in a compact and robust package, the ADLINK MXE-5300/5310 series is an idea choice for a wide range of applications.

Features

- Intel® Core™ i7-2710QE (Quad-Core) / i5-2510E / i3-2330E Processor
+ Intel® QM67 chipset
- Rugged, up to -20°C to 70°C (-4°F to 158°F) fanless operation (w/ industrial SSD)*
- Intel® Active Management Technology 7.0 support
- Optional wireless function enhancement (WCDMA, 802.11 a/b/g/n, BT3.0, AGPS)
- 1 on-board SATA-III (6.0 Gb/s) port
- 6 USB ports (USB 3.0 port x2 + USB 2.0 port x4), 4 DI + 4 DO
w/ 1.5KV isolation, 4 GbE ports
- 1 external CFast socket; 2 onboard mini PCIe card sockets
- 2 software-programmable RS-232/422/485 (COM1&2), 2 RS-232 (COM3&4)

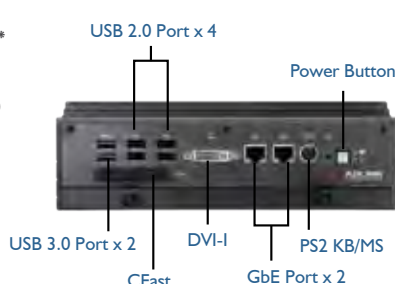

MXE-5300 Front Panel

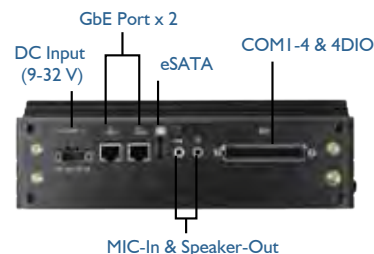

MXE-5300 Back Panel

Applications

- Intelligent Transportation Systems
- Facility Management
- Building Automation Systems (BAS)
- Digital Surveillance
- In-vehicle Multimedia and Surveillance

Software Support

OS Information

- Windows® XP / XP Embedded / 7
- Linux*

*Linux Distribution by Request

■ An Ingenious Design for Easy Maintenance



MXE-5300 with Antenna



1. Ready-to-deploy wall mount kit



2. One screw removable storage bracket



3. Flexible memory expansion slots

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device or CFast.

Specifications

Model Name	MXE-5301	MXE-5302	MXE-5303	MXE-5311/5312/5313
System Core				
■ Processor	Intel® Core™ i7-2710QE	Intel® Core™ i5-2510E	Intel® Core™ i3-2330E	Intel® Core™ i7-2710Q E/i5-2510E/i3-2330E
■ Chipset	Intel® Mobile Platform Controller Hub (QM67)			
■ Video	VGA+DVI dual display output by DVI-I connector Analog CRT, supports QXGA (2048 x 1536) resolution DVI output, supports up to 1920 x 1080 resolution			
■ Memory	4 GB DDR3 1066 MHz SODIMM module (Max. capacity 16 GB with 2 SODIMM socket option)			
I/O Interface				
■ Ethernet	4 GbE ports (2 Realtek® 8111C + 1 Intel® 82574IT + 1 82579LM PHY)			
■ Serial Ports	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)			
■ USB	4 USB 2.0 ports & 2 USB 3.0 ports			
■ DIO	4 DIO w/ 1.5KV isolation			
■ Audio	1 mic-in and 1 Line-out			
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse (combo)			
■ Mini PCIe	2 internal PCIe mini card sockets			1 internal PCIe mini card socket
■ USIM	1 USIM socket for 3G communication (used for a 3G-mini module)			-
■ WDT	Supports a watchdog timer			
Power Supply				
■ DC Input	Built-in 9-32 Vdc wide-range DC input 3P pluggable connectors with latch (GND, V-, V+)			
■ AC Input	Optional 160 W external AC-DC adapter for AC input			
Storage Device				
■ SATA HDD	1 SATA-III port for 2.5" HDD/SSD installation			One 2.5" HDD/SSD + one 3.5" HDD installation
■ CompactFlash	1 CFast slot			
■ eSATA	1 eSATA interface connectors on rear panel for storage expansion			
Mechanical				
■ Dimensions	230 mm (W) x 205 mm (D) x 75 mm (H) (9" x 8" x 2.9")			230 mm (W) x 205 mm (D) x 125 mm (H) (9" x 8" x 2.92")
■ Weight	3.8 kg (8.39 lbs)			5 kg (11.05 lbs)
■ Mounting	Wall-mount kit			
Environmental				
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended Temperature: -20°C to 60°C (-4°F to 140°F) (w/Industrial SSD or CFast)			Standard: 0°C to 50°C (32°F to 122°F) -
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CFast)			
■ Humidity	~95% @ 40°C (104°F) (non-condensing)			
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CFast or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ 2.5" HDD)			Operating, 0.2 Grms, 5-500 Hz, 3 axes (w/ 3.5" HDD)
■ ESD	Contact +/-4 KV and Air +/-8 KV			
■ Shock	Operating, 50 G, half sine 11 ms duration (w/ CFast or SSD)			
■ EMC	CE and FCC Class A			

Ordering Information

Model Name	Description	Storage	Memory	DIO
MXC-5301D	Intel® Core™ i7-2710QE fanless computer	One 2.5" HDD/SSD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation
MXC-5302D	Intel® Core™ i5-2510E fanless computer	One 2.5" HDD/SSD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation
MXC-5303D	Intel® Core™ i3-2330E fanless computer	One 2.5" HDD/SSD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation
MXC-5311D	Intel® Core™ i7-2710QE fanless computer	One 2.5" HDD/SSD + one 3.5" HDD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation
MXC-5312D	Intel® Core™ i5-2510E fanless computer	One 2.5" HDD/SSD + one 3.5" HDD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation
MXC-5313D	Intel® Core™ i3-2330E fanless computer	One 2.5" HDD/SSD + one 3.5" HDD	4 GB DDR	4 DI + 4 DO w/1.5 KV isolation

Optional Accessories

8/16 GB DDR3 Upgrade	Upgrade to 8/16 GB DDR3 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0 to 50°C) (32 to 122°F)
2 TB HDD Option	Factory-installed 2 TB SATA hard disk drive (0 to 50°C) (32 to 122°F) (MXE-5311/5312/5313)
8 GB/32 GB/64 GB SSD Option	Factory-installed of 8 GB/ 32 GB SLC type or 64 GB MLC type industrial-grade SATA solid state disk (-40 to 85 °C) (-40 to 185 °F)
160 W AC-DC Adapter	160 W industrial-grade AC-DC adapter (-20 to 70°C) (-4 to 158°F)
Wireless Module Option	3G/WiFi/BT/GPS wireless modules (3G/GPS for MXE-5301/5302/5303 only)
RF Matching Module Option	3G/WiFi/BT/GPS performance enhancement with RF Matching Module (MXE-5301/5302/5303 only)
Extended Temperature Option*	Optional screening to extend the operating temperature of the MXE-5301 to -20 to 60°C (-4 to 140°F) and MXE-5302/5303 to -20 to 70°C (-4 to 158°F)

MXE-5000 Series

Performance Intel® Core™ 2 Duo Processor-based Marine Grade Fanless Embedded Computer



MXE-5104M



MXE-5104

Introduction

ADLINK's MXE-5000 series is an exceptionally rugged embedded computer for operating in harsh environments. Its -20 to 70°C (-4 to 158°F) temperature range allows it to operate outdoors in both hot summer days and cold winter nights. The MXE-5000 can withstand 5 Grms vibration and can also be deployed in factory plants or on vehicles as. Its fanless and cable-less structure ensures extensive durability for long-term usage.

The MXE-5000 series features the Intel® Core™ 2 Duo P8400 2.26 GHz processor to deliver adequate performance at low-power. The MXE-5000 also integrates versatile general purpose and dedicated I/O features to support a wide variety of applications. Combining rugged design, integrated I/O functions, and IEC-60945 maritime standards compliance, the ADLINK MXE-5000 series provides a versatile choice for your applications.

Features

- Intel® Core™ 2 Duo P8400 2.26 GHz processor + Intel® GM45
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Built-in 9 V_{DC} to 24 V_{DC} wide-range DC power input
- Up to four 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two RS 232/422/485 ports
- Six USB 2.0 ports
- DVI-I connector combining analog CRT and DVI-D signals, supporting dual displays
- IEC-60945 maritime standards compliance (MXE-5104)

Applications


- Maritime Computer
- Facility Management
- Environment Monitoring
- Machine Automation
- Video Surveillance/Recognition
- Transportation

Software Support


■ OS Information

- Windows® XP / XP Embedded / 7
- Linux*


*Linux Distribution by Request

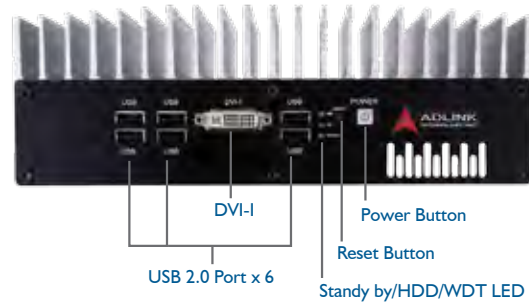

MXE-5104M Front Panel

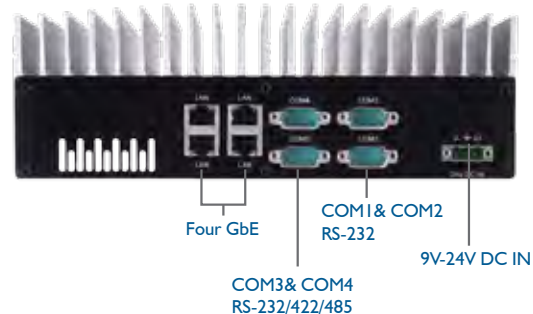

MXE-5104M Back Panel

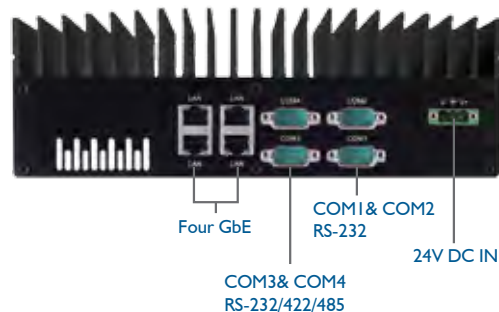

MXE-5104 Back Panel

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

Specifications

Model Name	MXE-5104M		MXE-5104	
System Core				
■ Processor	Intel® Core™ 2 Duo P8400 2.26 GHz CPU			
■ Chipset	Intel® GM45 Graphic Memory Control Hub Intel® I/O Controller Hub 9 Mobile (ICH9-M)			
■ Video	DVI-I connector Combines analog CRT and DVI-D signals, supports dual displays			
■ Memory	2 GB DDR3 SODIMM 2 sockets (supports up to 4 GB DDR3)		2G DDR3 SODIMM 1 Socket (support up to 4GB DDR3)	
I/O Interface				
■ Serial Port	2 RS-232 (COM1 & COM2) via DB9 connectors 2 RS-232/422/485 (COM3 & COM4) via DB9 connectors			
■ Ethernet	4 GbE ports (2 Intel® 82574L & 2 Realtek® 8111C)			
■ USB	6 USB 2.0 ports			
■ WDT	Supports a watchdog timer			
Power Supply				
■ DC Input	Built-in 9-24 Vdc DC input 3P pluggable connector with latch (V-, GND, V+)		24V isolation DC input 3P pluggable connector with latch (V-, GND, V+)	
■ AC Input	Optional 100 W external AC-DC adapter for AC input			
Storage Device				
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation			
Mechanical				
■ Dimensions	248 mm (W) x 185 mm (D) x 85 mm (H) (9"8 x 7"3 x 3.3")			
■ Weight	3.7 kg (8.14 lbs)			
■ Mounting	Wall-mount kit			
Environmental				
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)			
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)			
■ Humidity	~95% @ 40°C (104°F) (non-condensing)			
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)			
■ Shock	Operating, 50 G, half sine 11 ms duration (w/ CF or SSD)			
■ EMC	CE and FCC Class A		CE, FCC Class A and IEC-60945 compliance	

Ordering Information

Model Name	Description	IEC-60945 compliance	GbE	COM	USB	Memory
MXE-5104M	Intel® Core™ 2 Duo Fanless Embedded Computer	-	4	2 RS-232, 2 RS-232/422/485 ports	6	2 GB DDR3 SO-DIMM
MXE-5104	Intel® Core™ 2 Duo Maritime Fanless Embedded Computer	√	4	2 RS-232, 2 RS-232/422/485 ports	6	2 GB DDR3 SO-DIMM

Optional Accessories

4 GB DDR3 Upgrade	Upgrade to 4 GB DDR3 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
100 W AC-DC Adapter	100 W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXE-5000 series to -20°C to 70°C (-4°F to 158°F)

MXE-3000 Series

Intel® Atom™ D510 Processor-based Fanless Embedded Computer
with Integrated I/O



Introduction

The Matrix MXE-3000 series is the latest addition to the ADLINK's Matrix E series. It is based on the Intel® Atom™ D510 dual-core processor to offer greater computing power for your applications. The MXE-3000 series features an Intel® Atom™ D510 dual-core 1.66 GHz processor to boost its performance to almost twice that of the Atom™ N270 platform, while maintaining the same power consumption. This distinctive feature delivers to the ability to access multiple devices using a compact and rugged controller without the need for additional serial communication cards.

Leveraging the design of the Matrix MXE-1000 series, the MXE-3000 series retains all the remarkable features of the Matrix E series, including rugged -20°C to 70°C (-4°F to 158°F)* fanless operation, 5 Grms vibration resistance, and 9-32 Vdc wide range power input. The design of serial ports is also flexible to meet the needs of a wide variety of applications. Two COM ports can be configured to RS-232, RS-422, or RS-485 via a BIOS setting. The MXE-3000 series is also equipped with a mini-PCIe socket, USIM socket, six USB 2.0 ports, and its fanless and cable-less structure gives you extensive durability for long-term usage.

Combining rugged design and integrated I/O functions, the ADLINK MXE-3000 series provides the best choice for your versatile applications.

Features

- Intel® Atom™ D510 1.66 GHz processor + Intel® ICH8-M chipset
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Built-in 9 Vdc to 32 Vdc wide-range DC power input
- Two software-programmable RS-232/422/485 ports, and two RS-232 ports
- Up to three 1000/100/10 Mbps Ethernet ports
- Up to six USB 2.0 ports
- One internal PCIe Mini Card socket and USIM socket
- One external CF socket

Applications


- Toll Gate Controllers
- Smart Grid Applications
- Intelligent Transportation Systems
- Facility Management
- Medication Management
- Pharmacy Automation
- Environmental Monitoring
- Building Automation

Software Support


OS Information

- Windows® XP / XP Embedded / 7
- Linux*

*Linux Distribution by Request

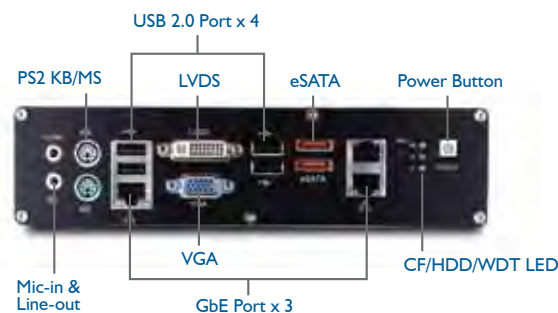

MXE-3000 Front Panel

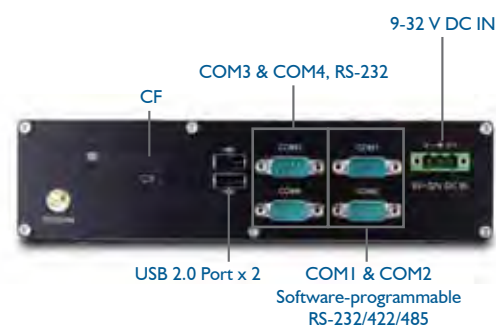

MXE-3000 Back Panel



MXE-3000 with Antenna

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

Specifications

Model Name	MXE-3002
System Core	
■ Processor	Intel® Atom™ D510 1.66 GHz CPU
■ Chipset	Intel® I/O Controller Hub 8 Mobile (ICH8-M)
■ Video	VGA+LVDS output by VGA+DVI-I stacked connector • Analog CRT, supports QXGA (2048 x 1536) resolution • 18-bit LVDS output by DVI-I connector
■ Memory	1 GB DDR2 667 MHz SODIMM module
I/O Interface	
■ Ethernet	3 GbE ports (1 Realtek® 8111C + 2 Intel® 82574L)
■ Serial Port	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)
■ USB	6 USB 2.0 ports
■ Audio	1 mic-in and 1 line-out
■ KB/MS	1 PS/ 2 keyboard and 1 PS/ 2 mouse
■ Mini PCIe	1 internal PCIe mini card socket
■ USIM	1 USIM socket for 3G communication (used for a 3G-mini module)
■ WDT	Supports a watchdog timer
Power Supply	
■ DC Input	Built-in 9-32 Vdc wide-range DC input 3P pluggable connector with latch (GND, V-, V+)
■ AC Input	Optional 80 W external AC-DC adapter for AC input
Storage Device	
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation
■ CompactFlash	1 type II CF socket, supporting PIO and DMA modes
■ eSATA	2 eSATA interface connectors on front panel for storage expansion
Mechanical	
■ Dimensions	210 mm (W) x 170 mm (D) x 53 mm (H) (8.3" x 6.7" x 2.1")
■ Weight	1.8 kg (3.97 lbs)
■ Mounting	Wall-mount kit
Environmental	
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/ industrial SSD)
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)
■ Humidity	~95% @ 40°C (104°F) (non-condensing)
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)
■ ESD	Contact +/-4 KV and Air +/-8 KV
■ Shock	Operating, 100 G, half sine 11 ms duration (w/ CF or SSD)
■ EMC	CE and FCC Class A

Ordering Information

Model Name	Description	COM Ports	GbE	USB	Memory
MXE-3002	Intel® Atom™ D510 1.66 G fanless embedded computer	2 RS-232/422/485 2 RS-232	3	6	1 GB DDR2

Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
80 W AC-DC adapter	80 W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXE-3000 series to -20°C to 70°C (-4°F to 158°F)

MXE-I300 Series

Intel® Atom™ D2550/ N2600 Processor-based Fanless Embedded Computer
with Rich I/O



Introduction

The Matrix MXE-I300 is the latest addition to ADLINK's Matrix line of embedded computers. Based on the Intel® Atom™ D2550/N2600 processor, the MXE-I300 provides excellent computing performance and outstanding power conservation.

Three Intel® Gigabit Ethernet ports deliver abundant support for a variety of internet/ intranet applications, and four digital I/O ports maximize flexibility for inter-device communication. An internal PCI Express Mini Card socket and USIM slot support extension functions, such as wireless connection (3G/WiFi/BT/GPS), video capture, Secure Access Modules (SAM), and others.

With its ruggedized architecture and rich I/O, the MXE-I300 is the best choice for industrial automation/ intelligent transportation systems, facility management, and applications demanding reliability in harsh environments. In addition, the MXE-I300 can meet the needs of digital surveillance with a supporting 3.5 inch HDD.

Features

- Intel® Atom™ D2550/N2600 processor + NM10 chipset
- 3.5" HDD support with internal SATA II interface (MXE-I311/ MXE-I312)
- 2 software-programmable RS-232/422/485 + 2 RS-232 ports
- 3 1000/100/10 Mbps Ethernet ports, 6 USB 2.0 ports, 4 digital input and output
- 1 external CF slot and 1 internal PCIe Mini Card socket with USIM slot
- Built-in wide-range DC power input
 - 6 VDC to 36 VDC for MXE-I301/MXE-I302
 - 9 VDC to 36 VDC for MXE-I311/MXE-I312
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation (w/ industrial SSD)

Applications

- Factory Automation / Industrial Automation
- Intelligent Transportation Systems
- Mobile Surveillance
- Facility Management
- Environment Monitoring
- SCADA / CIM

Software Support

OS Information


- Windows® CE7.0/XP/XP Embedded/Embedded Standard 7/7
- Linux*

*Linux Distribution by Request




Supports 3.5" HDD with internal SATA II interface
(MXE-I311/MXE-I312)

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

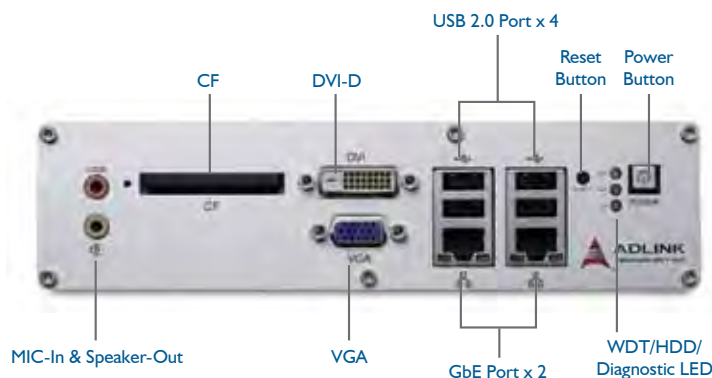

MXE-I300 Series Front Panel

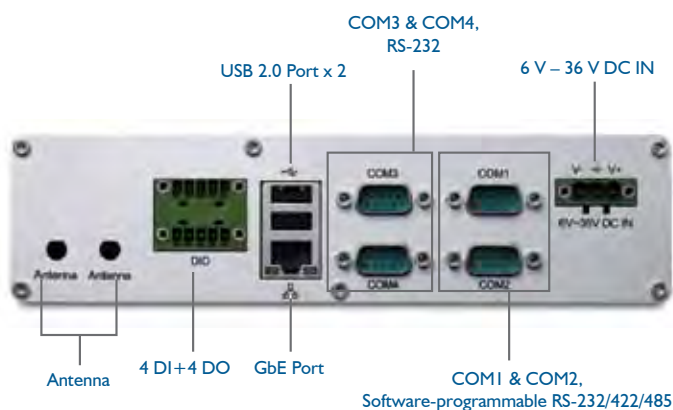

MXE-I300 Series Back Panel

Specifications

Model Name	MXE-1301	MXE-1302	MXE-1311	MXE-1312
System Core				
■ Processor	Intel® Atom™ D2550 1.86GHz CPU	Intel® Atom™ N2600 1.6GHz CPU	Intel® Atom™ D2550 1.86GHz CPU	Intel® Atom™ N2600 1.6GHz CPU
■ Chipset	Intel® NM10	Intel® NM10	Intel® NM10	Intel® NM10
■ Video	VGA+DVI dual display, supports 1920 x 1200 resolution			
■ Memory	2 GB DDR3 1066 MHz SODIMM module (Up to 4 GB support)	2 GB DDR3 800 MHz SODIMM module	2 GB DDR3 1066 MHz SODIMM module (Up to 4 GB support)	2 GB DDR3 800 MHz SODIMM module
I/O Interface				
■ Ethernet	3 GbE ports (3x Intel® 82574L)			
■ Serial Ports	4 COM ports (2 software-programmable RS-232/422/485, and 2 RS-232)			
■ USB	6 USB 2.0 ports			
■ DI/O	4 digital input and output			
■ Audio	1 mic-in and 1 line-out			
■ Mini PCIe	1 internal mini PCIe card socket			
■ USIM	1 USIM socket for 3G communication			
■ WDT	Watchdog timer support			
Power Supply				
■ DC Input	Built-in 6-36 VDC wide-range DC input		Built-in 9-36 VDC wide-range DC input	
■ AC Input	Optional 80 W external AC-DC adapter for AC input			
Storage Device				
■ SATA Storage	1 onboard SATA-II port for 2.5" HDD/SSD installation		1 onboard SATA-II port for 3.5" HDD installation	
■ CompactFlash	1 external type I CF socket, supports PIO/DMA modes			
Mechanical				
■ Dimensions	210 mm (W) x 170 mm (D) x 53 mm (H) (8.3" x 6.75" x 2.1")		210 mm (W) x 170 mm (D) x 58 mm (H) (8.3" x 6.75" x 2.3")	
■ Weight	1.8 kg (3.98 lbs)		1.8 kg (3.98 lbs)	
■ Mounting	VESA 100 hardware kit for wall-mounting			
Environmental				
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD or CF)			
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)			
■ Humidity	~95% @ 40°C (non-condensing)			
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)		Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF) Operating, 0.2 Grms, 5-500 Hz, 3 axes (w/ HDD)	
■ ESD	Contact +/-4 KV and Air +/-8 KV			
■ Shock	Operating, 100 G, half sine 11 ms duration (w/ CF or SSD)			
■ EMC	CE and FCC Class A			

Ordering Information

Model Name	Description	Storage Support	COM Ports	DI/O	GbE	USB	Memory
MXE-1301	Intel® Atom™ D2550 fanless embedded computer	2.5" HDD/SSD	4	4	3	6	2 GB
MXE-1302	Intel® Atom™ N2600 fanless embedded computer	2.5" HDD/SSD	4	4	3	6	2 GB
MXE-1311	Intel® Atom™ D2550 fanless embedded computer	3.5" HDD	4	4	3	6	2 GB
MXE-1312	Intel® Atom™ N2600 fanless embedded computer	3.5" HDD	4	4	3	6	2 GB

Optional Accessories

2 TB 3.5" HDD Option	Factory-installed 2 TB 3.5" hard disk drive (0°C to 60°C, 32°F to 140°F) (MXE-1311/MXE-1312)
4 GB DDR3 Upgrade	Upgrade to 4 GB DDR3 memory (MXE-1301/MXE-1311)
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB MLC SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 8 GB SLC industrial grade SATA solid state drive (-40°C to 85°C, -40°F to 185°F)
80 W AC-DC Adapter	80 W industrial grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional screening service to extend the operating temperature of the MXE-1300 series to -20°C to 70°C (-4°F to 158°F)

MXE-I200 Series

Intel® Atom™ N270 Processor-based Fanless Embedded Computer with 12 COM Ports



Introduction


ADLINK's MXE-I200 is based on the Intel® Atom™ N270 1.6 GHz processor and provides 12 serial ports for device communication and control. This distinctive feature delivers to the ability to access multiple devices using a compact and rugged controller without the need for additional serial communication cards.

Leveraging the design of the Matrix MXE-1000 series, the MXE-I200 series retains all the remarkable features of the Matrix E series, including rugged -20 to 70°C (-4 to 158°F) fanless operation, 5 Grms vibration resistance, and 6-36 VDC wide range power input. The design of serial ports is also flexible to meet the need of a wide variety of applications. Two of the 12 COM ports can be configured to RS-232, RS-422 or RS-485 via a BIOS setting. Two of the 12 COM ports are RS-232 COM Ports (COM3 & COM4). The remaining eight COM ports are either RS-232 (MXE-I212/232), RS-422 (MXE-I212/422) or RS-485 (MXE-I212/485). The MXE-I200 series is also equipped with a mini-PCIe socket, USIM socket to support expansion of wireless communication capabilities.

Combining reliability, compactness, and a unique feature of 12 COM ports, the MXE-I200 series is the perfect fit for communicating with external devices which will greatly benefit many applications such as toll gate control (RS-232), automatic fare collection systems (RS-232), and smart grid (RS-422/485).

Features

- Intel® Atom™ N270 1.6 GHz processor + 945GSE chipset
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Provides 12 COM ports
 - Two software-programmable RS-232/422/485 ports (COM1 & COM2)
 - Two RS-232 ports (COM3 & COM4)
 - 8 RS-232 ports (MXE-I212/232), 8 RS-422 ports (MXE-I212/422), 8 RS-485 ports (MXE-I212/485)
- Built-in 6 V_{DC} to 36 V_{DC} wide-range DC power input
- One 1000/100/10 Mbps Ethernet port
- One internal PCIe mini card socket and USIM socket
- One external CF socket

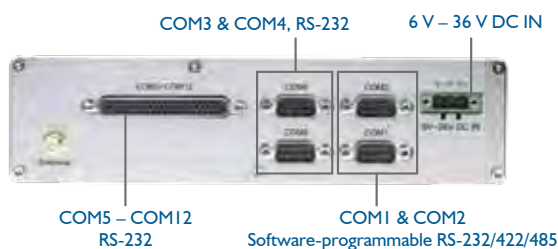

MXE-I212/232 Back Panel


Applications

- Toll Gate Controllers
- Smart Grid Applications
- Intelligent Transportation Systems
- Facility Management
- Environmental Monitoring
- Building Automation


Software Support

OS Information


- Windows® CE6.0 / XP / XP Embedded / 7

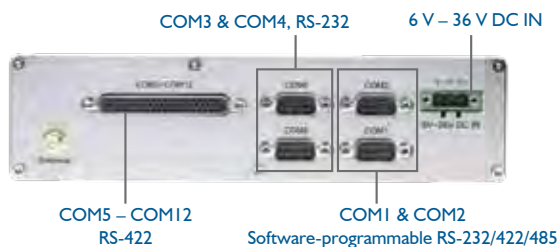


MXE-I212/422 Back Panel

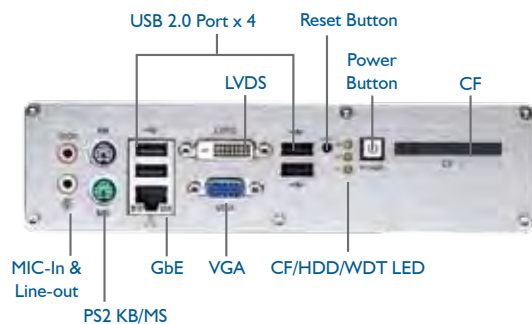

MXE-I200 Series Front Panel

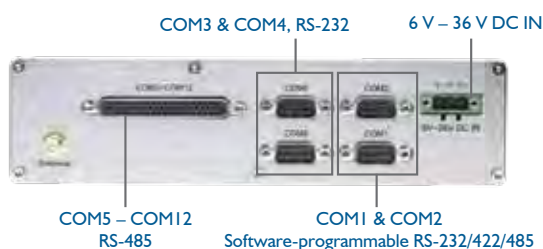

MXE-I212/485 Back Panel



*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

Specifications

Model Name		MXE-1212/232		MXE-1212/422		MXE-1212/485	
System Core							
■ Processor		Intel® Atom™ N270 1.6 GHz CPU					
■ Chipset		Intel® 945GSE Graphic Memory Control Hub Intel® I/O Controller Hub 7 Mobile (ICH7-M)					
■ Video		Analog CRT, supports QXGA (2048 X 1536) resolution 18-bit LVDS output by DVI-D connector for LCD panel					
■ Memory		1 GB DDR2 533 MHz SODIMM module					
I/O Interface							
■ Serial Port		COM1 & COM2	2 software-programmable RS-232/422/485 by DB9 connectors				
		COM3 & COM4	2 RS-232 by DB9 connectors	2 RS-232 by DB9 connectors	2 RS-232 by DB9 connectors		
		COM5 - COM12	8 RS-232 by DB62 connectors	8 RS-422 by DB62 connectors	8 RS-485 by DB62 connectors		
■ Ethernet		1 GbE port (Realtek® 8111C)					
■ USB		4 USB 2.0 ports					
■ Mini-PCIe		1 internal PCIe mini card socket					
■ USIM		1 USIM socket for 3G communication (used for a 3G mini-PCIe module)					
■ Audio		1 mic-in and 1 line-out					
■ KB/MS		1 PS/2 keyboard and 1 PS/2 mouse					
■ WDT		Supports a watchdog timer					
Power Supply							
■ DC Input		Built-in 6-36 Vdc wide-range DC input 3P pluggable connector with latch (V-, GND, V+)					
■ AC Input		Optional 40 W external AC-DC adapter for AC input					
Storage Device							
■ SATA HDD		On-board SATA port for 2.5" HDD/SSD installation					
■ CompactFlash		1 type II CF socket, supporting PIO and DMA modes for HDD replacement					
Mechanical							
■ Dimensions		210 mm (W) x 170 mm (D) x 54 mm (H) (8.3" x 6.7" x 2.1")					
■ Weight		1.9 kg (4.19 lbs)					
■ Mounting		VESA 100 mounting kit for wall-mount					
Environmental							
■ Operating Temperature*		Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)					
■ Storage Temperature		-40°C to 85°C (-40°F to 185°F) (excl. HDD/SSD/CF)					
■ Humidity		~95% @ 40°C (104°F) (non-condensing)					
■ Vibration		Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)					
■ Shock		Operating, 100 G, half sine 11 ms duration (w/ CF or SSD)					
■ EMC		CE and FCC					

Ordering Information

Model Name	Description	COM Ports	GbE	USB	Memory
MXE-1212/232	Intel® Atom™ N270 fanless embedded computer	2 RS-232/422/485 10 RS-232	1	4	1 GB DDR2
MXE-1212/422	Intel® Atom™ N270 fanless embedded computer	2 RS-232/422/485 2 RS-232, 8 RS-422	1	4	1 GB DDR2
MXE-1212/485	Intel® Atom™ N270 fanless embedded computer	2 RS-232/422/485 2 RS-232, 8 RS-485	1	4	1 GB DDR2

Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0°C to 50°C, 32°F to 122°F)
32 GB SSD Option	Factory-installed 32 GB & Intel 40 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
40 W AC-DC Adapter	40W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXE-1200 series to -20°C to 70°C (-4°F to 158°F)

MXE-1000 Series

Intel® Atom™ Processor-based Fanless Embedded Computer with Integrated I/O



Introduction

ADLINK's MXE-1000 series is an exceptionally rugged embedded computer for operating in harsh environments. Its -20 to 70°C (-4 to 158°F)* temperature range allows it to operate outdoors in both hot summer days and cold winter nights. The Matrix can also be deployed in factory planes or on vehicles as it can withstand 5 Grms vibration. And, its fanless and cable-less structure ensures extensive durability for long-term usage.

The MXE-1000 series features the Intel® Atom™ N270 1.6 GHz processor to deliver adequate performance at low-power. The MXE-1000 also integrates versatile generic and special-purpose I/O features to support a wide variety of applications. The on-board Gigabit Ethernet and 1394b ports are designed for connecting cameras for surveillance and image recognition applications, while its COM ports fit requirements in most machine automation and facility management applications.

Combining rugged design and integrated I/O functions, the ADLINK MXE-1000 series offers the most versatile choice for your applications.

Features

- Intel® Atom™ N270 1.6 GHz processor + 945GSE chipset
- Rugged, -20°C to 70°C (-4°F to 158°F) fanless operation*
- Built-in 6 Vdc to 36 Vdc wide-range DC power input
- Up to three 1000/100/10 Mbps Ethernet ports
- Two 1394b FireWire ports (MXE-1020 only)
- Two RS-232 ports and two RS-232/422/485 ports
- One internal PCIe Mini Card socket with an USIM socket
- One external CF socket

Applications

- Intelligent Transportation
- Facility Management
- Environment Monitoring
- Machine Automation
- Video Surveillance/Recognition
- Building Automation

Software Support


OS Information

- Windows® CE6.0 / XP / XP Embedded / 7
- Linux*


*Linux Distribution by Request




Inside MXE-1000 Series

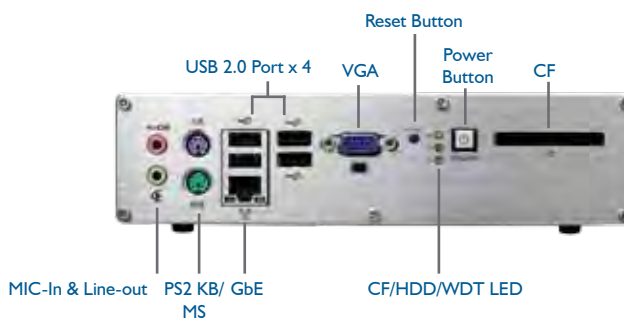


MXE-1000 Series Front Panel

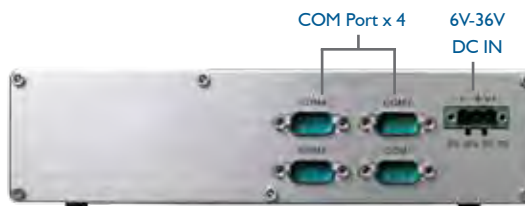

MXE-1005 Back Panel

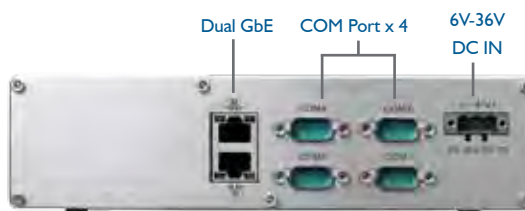

MXE-1010 Back Panel

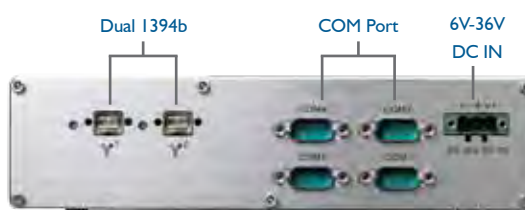

MXE-1020 Back Panel

*Extending the operating temperature is optional and requires use of an industrial solid-state drive storage device.

Specifications

Model Name	MXE-1005	MXE-1010	MXE-1020
System Core			
■ Processor	Intel® Atom™ N270 1.6 GHz CPU		
■ Chipset	Intel® 945GSE Graphic Memory Control Hub Intel® I/O Controller Hub 7 Mobile (ICH7-M)		
■ Video	Analog CRT, supports QXGA (2048 x 1536) resolution		
■ Memory	1 GB DDR2 533 MHz SODIMM module		
I/O Interface			
■ Ethernet	1 GbE port (Realtek® 8111C)	3 GbE ports (Realtek® 8111C+Intel® 82574) (support teaming function)	1 GbE port (Realtek® 8111C)
■ 1394b	-	-	2 1394b FireWire 800 ports
■ Serial Port	2 RS-232/422/485 (jumper selectable, COM1 & COM2) 2 RS-232 (COM3 & COM4)		
■ USB	4 USB 2.0 ports		
■ Mini-PCle	1 internal PCIe mini card socket		
■ USIM	1 USIM socket for 3G communication (used with 3G Mini-PCle module)		
■ Audio	1 mic-in and 1 line-out		
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse		
■ WDT	Supports a watchdog timer		
Power Supply			
■ DC Input	Built-in 6-36 Vdc wide-range DC input 3P pluggable connector with latch (V-, GND, V+)		
■ AC Input	Optional 40 W external AC-DC adapter for AC input		
Storage Device			
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation		
■ CompactFlash	1 type I CF socket, supporting PIO and DMA modes		
Mechanical			
■ Dimensions	210 mm (W) x 170 mm (D) x 53 mm (H) (8.3" x 6.7" x 2.1")		
■ Weight	1.8 kg (3.97 lbs)		
■ Mounting	VESA 100 wall mounting kit		
Environmental			
■ Operating Temperature*	Standard: 0°C to 50°C (32°F to 122°F) Extended option: -20°C to 70°C (-4°F to 158°F) (w/industrial SSD)		
■ Storage Temperature	-40°C to 85°C (-40°F to 185°F) (excluding HDD/SSD/CF)		
■ Humidity	~95% @ 40°C (104°F) (non-condensing)		
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.7 Grms, 5-500 Hz, 3 axes (w/ HDD)		
■ Shock	Operating, 100 G, half-sine 11 ms duration (w/ CF or SSD)		
■ EMC	CE and FCC Class A		

Ordering Information

Model Name	CPU	GbE	1394b	COM	USB	Memory
MXE-1005	Intel® Atom™ N270 fanless embedded computer	1	-	4	4	1 GB DDR2
MXE-1010	Intel® Atom™ N270 fanless embedded computer	3	-	4	4	1 GB DDR2
MXE-1020	Intel® Atom™ N270 fanless embedded computer	1	2	4	4	1 GB DDR2

Optional Accessories

2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
160 GB HDD Option	Factory-installed 160 GB SATA hard disk drive (0°C to 60°C, 32°F to 140°F)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0°C to 70°C, 32°F to 158°F)
8 GB Industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40°C to 85°C, -40°F to 185°F)
40 W AC-DC Adapter	40 W industrial-grade AC-DC adapter (-20°C to 70°C, -4°F to 158°F)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXE-1000 series to -20°C to 70°C (-4°F to 158°F)



□ **ADLINK Technology, Inc.**

9F., No.166, Jian 1st Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan
新北市中和區建一路166號9樓
Tel: +886-2-8226-5877
Fax: +886-2-8226-5729
Email: service@adlinktech.com

□ **Ampro ADLINK Technology, Inc.**

5215 Hellyer Avenue, #110, San Jose, CA 95138, USA
Tel: +1-408-360-0200
Toll Free: +1-800-966-5200 (USA only)
Fax: +1-408-360-0222
Email: info@adlinktech.com

□ **ADLINK Technology Singapore Pte. Ltd.**

84 Genting Lane #07-02A, Cityneon Design Centre,
Singapore 349584
Tel: +65-6844-2261
Fax: +65-6844-2263
Email: singapore@adlinktech.com

□ **ADLINK Technology Singapore Pte. Ltd.
(Indian Liaison Office)**

1st Floor, #50-56 (Between 16th/17th Cross) Margosa Plaza,
Margosa Main Road, Malleswaram, Bangalore-560055, India
Tel: +91-80-65605817, +91-80-42246107
Fax: +91-80-23464606
Email: india@adlinktech.com

□ **ADLINK Technology Japan Corporation**

〒101-0045 東京都千代田区神田鍛冶町3-7-4
神田374ビル4F
Tel: +81-3-4455-3722
Fax: +81-3-5209-6013
Email: japan@adlinktech.com

□ **ADLINK Technology, Inc. (Korean Liaison Office)**

서울시 서초구 서초동 1675-12 모인터빌딩 8층
Tel: +82-2-2057-0565
Fax: +82-2-2057-0563
Email: korea@adlinktech.com

□ **ADLINK Technology (China) Co., Ltd.**

上海市浦东新区张江高科技园区芳春路300号 (201203)
Tel: +86-21-5132-8988
Fax: +86-21-5192-3588
Email: market@adlinktech.com

□ **ADLINK Technology Beijing**

北京市海淀区上地东路1号盈创动力大厦E座801室(100085)
Tel: +86-10-5885-8666
Fax: +86-10-5885-8626
Email: market@adlinktech.com

□ **ADLINK Technology Shenzhen**

深圳市南山区科技园南区高新南七道数字技术园
A1栋2楼C区 (518057)
Tel: +86-755-2643-4858
Fax: +86-755-2664-6353
Email: market@adlinktech.com

□ **LIPPERT ADLINK Technology GmbH**

Hans-Thoma-Strasse 11, D-68163, Mannheim, Germany
Tel: +49 621 43214-0
Fax: +49 621 43214-30
Email: emea@adlinktech.com

□ **ADLINK Technology, Inc. (French Liaison Office)**

15 rue Emile Baudot, 91300 Massy CEDEX, France
Tel: +33 (0) 1 60 12 35 66
Fax: +33 (0) 1 60 12 35 66
Email: france@adlinktech.com

□ **ADLINK Technology, Inc. (Israel Liaison Office)**

6 Hasadna St., Kfar-Saba, 44424 Israel
Tel: +972-9-744-6541
Fax: +972-9-744-6542
Email: israel@adlinktech.com



Embed ADLINK in Your Solutions 
www.adlinktech.com

All products and company names listed are trademarks or trade names of their respective companies.
All specifications are subject to change without further notice.



50-40220-1000