



cPCIS-2630

3U CompactPCI® Subsystem with 8-slot Backplane and 400 W ATX Power Supply

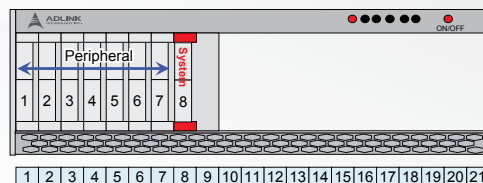

cPCIS-2630R Inside Front View

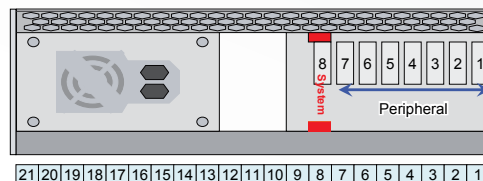

cPCIS-2630R Inside Rear View

Features

- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Supports rear I/O backplane with P2 connectors for cPCI 50mm depth RTMs (cPCIS-2630R)
- Temperature, voltage, and fan monitoring LEDs
- Hot-swappable cooling fans & filter
- 400 W ATX Power supply


Ordering Information

Model Name	System	Peripheral	Rear	Alarm Module	PSU QTY	PSU MAX	PICMG®
cPCIS-2630	1	7	N/A	Yes	1	400 W	2.0, 2.1
cPCIS-2630R	1	7	7	Yes	1	400 W	2.0, 2.1


Note: EMC blank panels (cPCI-Panel-Kit-3U1S) are optional. All models above do not include any system or peripheral boards.

cPCIS-2632

3U CompactPCI® Subsystem with 8-slot Backplane and 1 + 1 CompactPCI® Redundant Power Modules

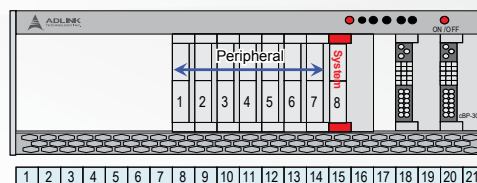

cPCIS-2632R Inside Front View

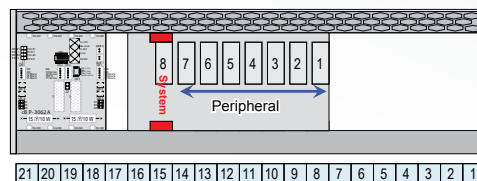

cPCIS-2632R Inside Rear View

Features

- 3U CompactPCI® backplane with seven peripheral slots and one system slot
- Temperature, voltage, and fan monitoring LEDs
- Supports current sharing on +5 V, +3.3 V, and +12 V
- 1 + 1 hot swappable 250 W + 250 W CompactPCI® power supplies
- PICMG® 2.11 47-pin power interface
- Hot-swappable cooling fans & filter
- Supports rear I/O backplane with P2 connectors for cPCI 50mm depth RTMs (cPCIS-2632R)

Ordering Information

Model Name	System	Peripheral	Rear	Alarm Module	PSU QTY	PSU MAX	PICMG®
cPCIS-2632	1	7	N/A	Yes	2	500 W (1 + 1)	2.0, 2.1, 2.11
cPCIS-2632R	1	7	7	Yes	2	500 W (1 + 1)	2.0, 2.1, 2.11

Note: EMC blank panels (cPCI-Panel-Kit-3U1S) are optional. All models above do not include any system or peripheral boards.