



**Description:** Guide to replaying data from a published web page using VCRWorX32.

**OS Requirement:** Windows 2000/NT/Server 2003/XP.

**General Requirement:** GENESIS32 version 8.0 and WebHMI version 8.0 installed on the Web Server/publisher machine.

## VCRWorX32 setup for WebHMI

1. To use VCRWorX32 with WebHMI, the page that will be published must have a button to launch the VCRWorX32 panel, as well as a button to close it.
2. In GraphWorX32, add a button by clicking on the  button in the **Dynamics** toolbar and clicking somewhere on the page.



Fig 1: The add a button icon

3. Select **VCR Panel Show** from the **Action** drop down menu of the **Pick Action** in the **Property Inspector**.

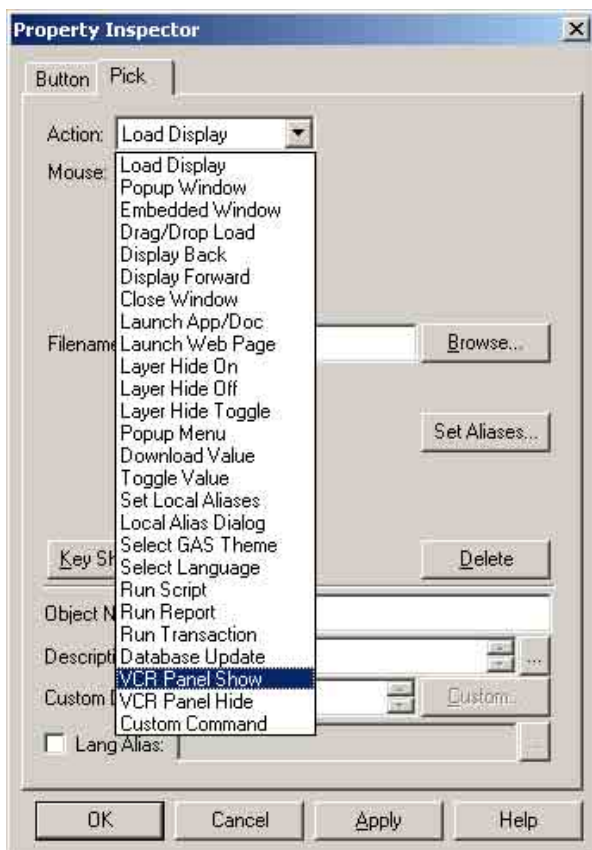


Fig 2: VCR Panel Show from Action Drop Down Menu

4. Click **Apply** and position the button where you want it on the display.
5. Now add a button to hide the VCRWorX32 panel by repeating steps 1 and 2 and choosing **VCR Panel Hide** from the **Action** menu of the **Pick Action** in the **Property Inspector**.
6. Publish the page as you would any normal page. You may want to make sure VCRWorX32 is working locally before publishing.

## On the WebHMI Client

1. In Internet Explorer, point to the Web address that you published your display to, in order to view it over WebHMI.
2. To view the **VCR Panel**, click on the **VCR Panel Show** button on the display.
3. Use **VCRWorX32** as you would locally.
4. Click on the **VCR Panel Hide** button to hide the VCR Panel.

**NOTE:** For help on VCRWorX32 and Web publishing, please refer to their respective application notes.