


SC24 – AMD G-Series SBC for Multi-Display Control

- **AMD T48N, 1.4 GHz**
- **2x2 DisplayPort® interfaces**
- **Maximum resolution 2560x1600**
- **Up to 4 GB DDR3 RAM**
- **2 Gigabit Ethernet**
- **SD card and mSATA slots**
- **Prepared for -40 to +85°C operating temperature (screened)**
- **Optimized for conductive cooling**

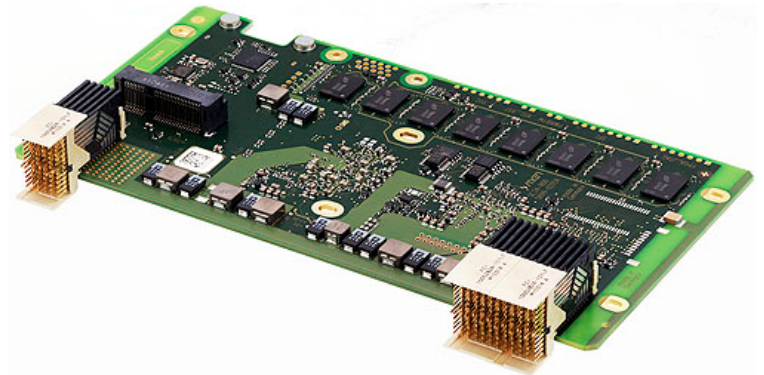

The SC24 is a maintenance-free single-board computer designed to serve as the heart of MEN's box and display computer systems for use in commercial vehicles, mobile machines, railway applications, avionics and industrial automation.

It is powered by an AMD Embedded G-Series APU (Accelerated Processing Unit), the T48N, running at 1.4 GHz. The G-Series combines low-power CPUs and advanced GPUs, in this case an AMD Radeon™ HD 6310, into a single embedded device. The use of the Embedded G-Series makes for high scalability in CPU (single/dual core) and graphics performance (various Radeon™ GPUs or none at all).

The system is equipped with 2 GB of DDR3 SDRAM and offers SD card and mSATA slots. It is designed for fanless operation at temperatures from -40 to +85°C. For this it relies on conduction cooling, as realized in the [BC50M](#) Box PC, for example, where the entire housing serves as a heat sink for the internal electronics.


It supports up to two pairs of DisplayPort® interfaces (two independent images, each sent to one or two display panels) with a maximum resolution of 2560x1600 each. Other I/O includes up to 9 USB 2.0, 2 Gigabit Ethernet channels, 3 PCI Express®, up to 5

serial interfaces (4 UARTs also configurable as IBIS or GPS and 1 CAN), HD audio, 1 SATA and various GPIO, e.g., for status LEDs.

The SC24 is not meant to be used as a stand-alone board, as all I/O is collected on two pairs of AirMax VS® connectors - one for all graphics interfaces and one for all remaining I/O, allowing for flexible configuration on separate boards. By using the necessary interface boards like an [AE51](#) or similar customer-specific solutions, the signals can be made available on standard connectors and various types of wide-range PSUs can be added. An I/O board can also offer the option of additional mass storage via the SC24's SATA interface and connections to other periphery, e.g., PCI Express® Mini cards via the PCIe® interface. Used in combination with the [AE51](#) interface board and its integrated PSU, the unit is compliant with EN 50155 and prepared for e1 certification.

The combination of the various CPU/GPU options with easily customized interface boards makes for an extremely flexible system design that can quickly be tailored to a vast number of applications.

Diagram

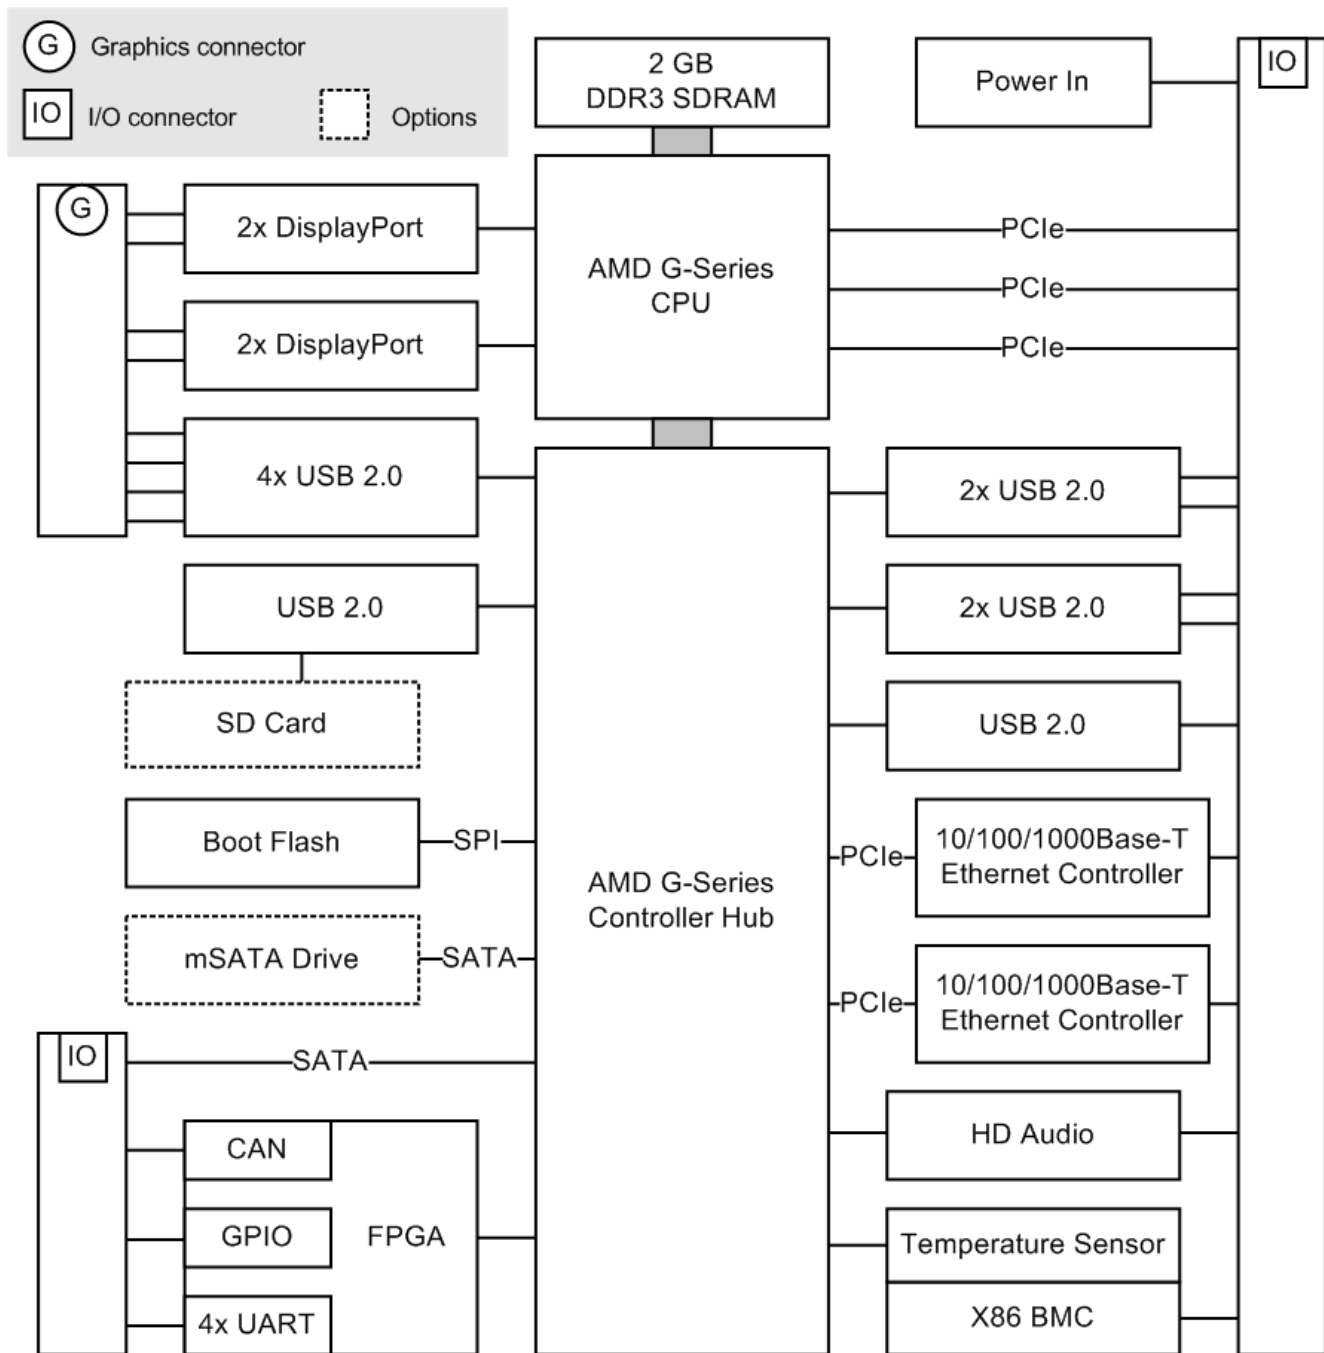

Technical Data

CPU	■ AMD Embedded G-Series T48N □ 1.4 GHz processor core frequency □ Accelerated Processing Unit (APU), also includes GPU (see Graphics)
Controller Hub	■ AMD A55E
Memory	■ 64 KB L1 and 512 KB L2 cache ■ 2 GB DDR3 SDRAM system memory □ Soldered □ 1333 MT/s (667 MHz)
Mass Storage	■ One SD card slot □ Via USB ■ One mSATA slot □ Transfer rate up to 3 Gbit/s
Graphics	■ AMD Radeon™ HD 6310 □ Dual independent display support □ 2x2 DisplayPort® 1.1a interfaces □ Maximum resolution: 2560x1600 □ Embedded in T48N APU ■ 3D Graphics Acceleration □ Full DirectX® 11 support, including full speed 32-bit floating point per component operations □ Shader Model 5 □ OpenCL™ 1.1 support □ OpenGL® 4.0 support ■ Motion Video Acceleration □ Dedicated hardware (UVD 3) for H.264, VC-1 and MPEG2 decoding □ HD HQV and SD HQV support: noise removal, detail enhancement, color enhancement, cadence detection, sharpness, and advanced de-interlacing □ Super up-conversion for SD to HD resolutions
Graphics interfaces via two 72-pin AirMax VS® graphics connectors	■ 2x2 DisplayPort® □ DisplayPort® A and B with AUX channel and hot plug detection □ DisplayPort® C and D are duplicates of A and B ■ 4 USB 2.0
Other I/O via two 72-pin AirMax VS® I/O connectors	■ 5 USB 2.0 ■ 2 Ethernet 10/100/1000Base-T channels ■ 1 SATA interface for HDD/SSD □ SATA Revision 3.x support □ Transfer rates up to 600 MB/s (6 Gbit/s) ■ 4 UART or IBIS, GPS ■ 1 CAN bus ■ 3 PCI Express® x1 □ Three x1 links □ PCIe® 2.x support □ Data rate 500 MB/s in each direction (5 Gbit/s per lane) ■ Various GPIO (e.g., for status LEDs) ■ HD audio □ HD audio codec □ Audio stereo in □ Audio stereo out □ SPDIF out
Real-Time Clock	■ Buffered by power source on connected interface board
Electrical Specifications	■ Supply voltage: 12 VDC nom. ±10% ■ Power consumption: Up to 25 W

Technical Data

Mechanical Specifications	■ Dimensions: approx. 170 mm x 90 mm x 30 mm ■ Weight: approx. 200 g
Environmental Specifications	■ Temperature range (operation): □ -40 to +85°C (screened) depending on cooling concept □ Sufficient conduction cooling required ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300 m to +3,000 m ■ Shock: 50 m/s², 30 ms ■ Vibration (function): 1 m/s², 5 Hz - 150 Hz ■ Vibration (lifetime): 7.9 m/s², 5 Hz - 150 Hz ■ Conformal coating on request
MTBF	■ tbd. h @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Conforming to EN 55022 (radio disturbance), IEC 61000-4-2 (ESD) and IEC 61000-4-4 (burst) ■ Prepared for certification according to e1 requirements of the German Federal Motor Transport Authority when used in combination with an AE51 I/O board
BIOS	■ InsydeH2O™ UEFI Framework
Software Support	■ Windows® 7 ■ Windows® Embedded Standard 7 ■ Windows® XP Embedded (on request) ■ Linux ■ For more information on supported operating system versions and drivers see Downloads.

Configuration & Options

Standard Configurations

Article No.	APU	Graphics	Memory	Video Out
08SC24-00	AMD T52R, 1.5 GHz Single Core (18W)	AMD Radeon HD 6310	1 GB DDR3-1333, 64KB L1 cache, 512kB L2 cache	2x2 DisplayPort

Options

APU	■ AMD T56N, 1.65 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 18W), DDR3-1333, AMD Radeon™ HD 6320 ■ AMD T52R, 1.5 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 18W), DDR3-1333, AMD Radeon™ HD 6310 ■ AMD T48N, 1.4 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 18W), DDR3-1066, AMD Radeon™ HD 6310 ■ AMD T40N, 1.0 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 9W), LVDDR3-1066, AMD Radeon™ HD 6290 ■ AMD T44R, 1.2 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 9W), LVDDR3-1066, AMD Radeon™ HD 6250 ■ AMD T40E, 1.0 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 6.4W), LVDDR3-1066, AMD Radeon™ HD 6250 ■ AMD T40R, 1.0 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 5.5W), LVDDR3-1066, AMD Radeon™ HD 6250 ■ AMD T16R, 615 MHz Single Core (L1 cache 64KB, L2 cache 512kB, 4.5W), LVDDR3-1066, AMD Radeon™ HD 6250
Memory	■ Up to 4 GB DDR3 SDRAM system memory
Graphics	■ Maximum resolution depending on GPU □ 2560x1600 (all DisplayPort® interfaces) with Radeon™ HD 6310 and 6320 □ 1920x1200 (all DisplayPort® interfaces) with Radeon™ HD 6250 and 6290
Software Support	■ Windows® XP Embedded (on request)

As the product concept is very flexible, there are many other configuration possibilities. Please contact our sales team if you do not find your required function in the options. Please note that some of these options may only be available for large volumes.

Ordering Information

Standard SC24 Models	08SC24-00	Multi-display SBC with AMD T48N, 1.4 GHz, 2 GB RAM, SD card slot, mSATA slot, 2x2 DisplayPorts, 12V PSU (non isolated), prepared for -40 to +85°C screened via conductive cooling
Related Hardware	08AE51-00	Graphics & I/O interface board for display and box computers; 2x DisplayPort®, 2x Gb Ethernet, 1x USB, 2x PCI Express® Mini card slot, 2x SIM card slot, 2x SA-Adapter™ slot, PSU 24 VDC, -40 to +85°C screened
Memory	0751-0047	SD card, 4GB, -40..+85°C
	0751-0051	SSD mSATA, 8 GB, -40..+85°C
	0754-0007	SSD SATA 256 GB, 2.5" MLC, 0..+70°C
Miscellaneous Accessories	08AE84-00	Carrier for 2.5" HDD/SSD SATA disk, -40°..+85°C with qualified components
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	13SC24-90	Linux I2C controller driver (MEN) for SC24, AE51 and BC50M
	13Y004-06	MDIS5™ low-level driver sources (MEN) for generic SMBus driver for F14, F15, F17, F18, F19P, F21P, G20, D9, D601, F600 and F601, A19, A20, F217 and SC24
	13Z010-06	MDIS4™/2004/MDIS5™ low-level driver sources (MEN) for 16Z076_QSPI
	13Z015-06	MDIS5™ low-level driver sources (MEN) for 16Z029_CAN (MSCAN/Layer2)
	13Z016-06	MDIS5™ driver (MEN) for 16Z029_CAN (CANopen master)
	13Z017-06	MDIS5™ low-level driver sources (MEN) for 16Z034_GPIO and 16Z037_GPIO
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	10F014-78	Windows® XP Embedded BSP (MEN) for F11S, F14, F15, F17, F18, F19P, F21P, G20, XM1, XM1L, XM2, MM1, MM2, SC21, SC24, SC27, DC1, DC2, RC1 and BC50M
	10Y000-78	Windows® Embedded Standard 7 BSP for F11S, F19P, F21P, G20, XM1L, XM2, MM1, MM2, SC21, SC24, SC27, BC50M, F206, F210, F215, F216, G215, P506, P507 and P511
	13T010-70	Windows® 32-bit network driver (Intel®) for XM1, XM1L, XM2, MM2, F11S, F18, F18E, F19P, F21P, G20, GM1, GM2, G211, G211F, SC24 and BC50M
	13T020-70	Windows® 64-bit network driver (Intel®) for F18, F18E, F19P, F21P, G20, GM1, GM2, G211, G211F, XM2, SC24 and BC50M
	13T025-70	Windows® XP GPU and chipset driver (AMD) for BC50M and SC24
	13T026-70	Windows® Vista™ / Windows® 7 GPU and chipset driver (AMD) for BC50M, SC24 and G214
	13Z010-70	MDIS5™ Windows® driver (MEN) for 16Z076_QSPI devices
	13Z015-70	MDIS4™/2004/MDIS5™ Windows® driver (MEN) for 16Z029_CAN (MSCAN/Layer2)
	13Z016-70	MDIS5™ Windows® driver (MEN) for 16Z029_CAN (CANopen master)
	13Z017-70	MDIS4™/2004 / MDIS5™ Windows® driver (MEN) for 16Z034_GPIO devices

For operating systems not mentioned here [contact MEN sales](#).

Ordering Information

Documentation	20SC24-00	SC24 User Manual
	21APPN015	Application Note: Using Real-Time Operating Systems on MEN CPUs with InsydeH2O™ UEFI BIOS

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.