


F608 – 3U CompactPCI® Side Card for RAID Systems

- 4/8 HP extension for 3U Intel® SBCs F14, F15, F17, F18, F19P, F21P
- 4 SATA ports via J2 rear I/O
- RAID 0, 1 and 5 support
- CompactPCI® PlusIO compliant
- 1 SATA hard-disk slot 2.5" on board
- 2 COMs via SA-Adapters™
- Optical isolation depending on SA-Adapter™
- Two optical Gigabit Ethernet interfaces via SFP as an option

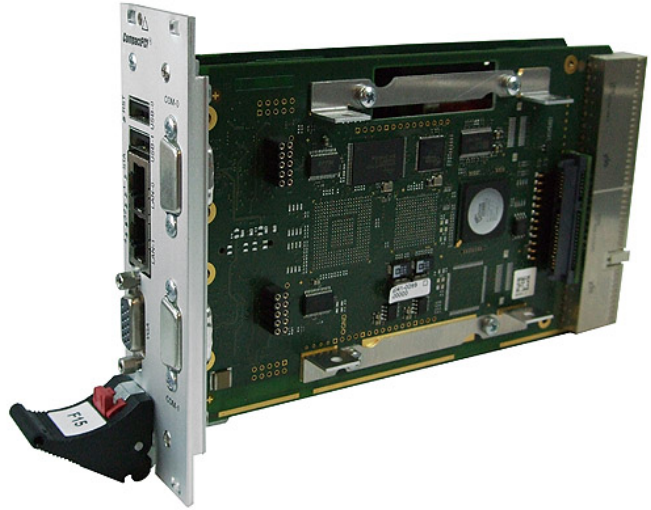


The F608 is a 4HP SATA extension card for 3U Intel® based CompactPCI® single-board computers. It can be used in combination with the F14 and [compatible CPU boards](#).

It offers four SATA interfaces over a SATA port multiplier via PCI Express® as well as one SATA slot on-board (from the chipset). Two individually configurable UARTs are accessible via D-Sub connector at the front. Two

USB and two PCI Express® links are available via rear I/O. As an option, the F608 also offers the possibility to realize two optical Ethernet interfaces via SFP.

The F608 is directly plugged to the right side of the respective single-board computer. A robust connector makes for high mechanical stability. It is delivered with an 8HP front panel, replacing the 4HP front panel of a 3U single-board computer and thus resulting in a solid one-piece front panel. The operating temperature range is 0..60°C.

Diagram

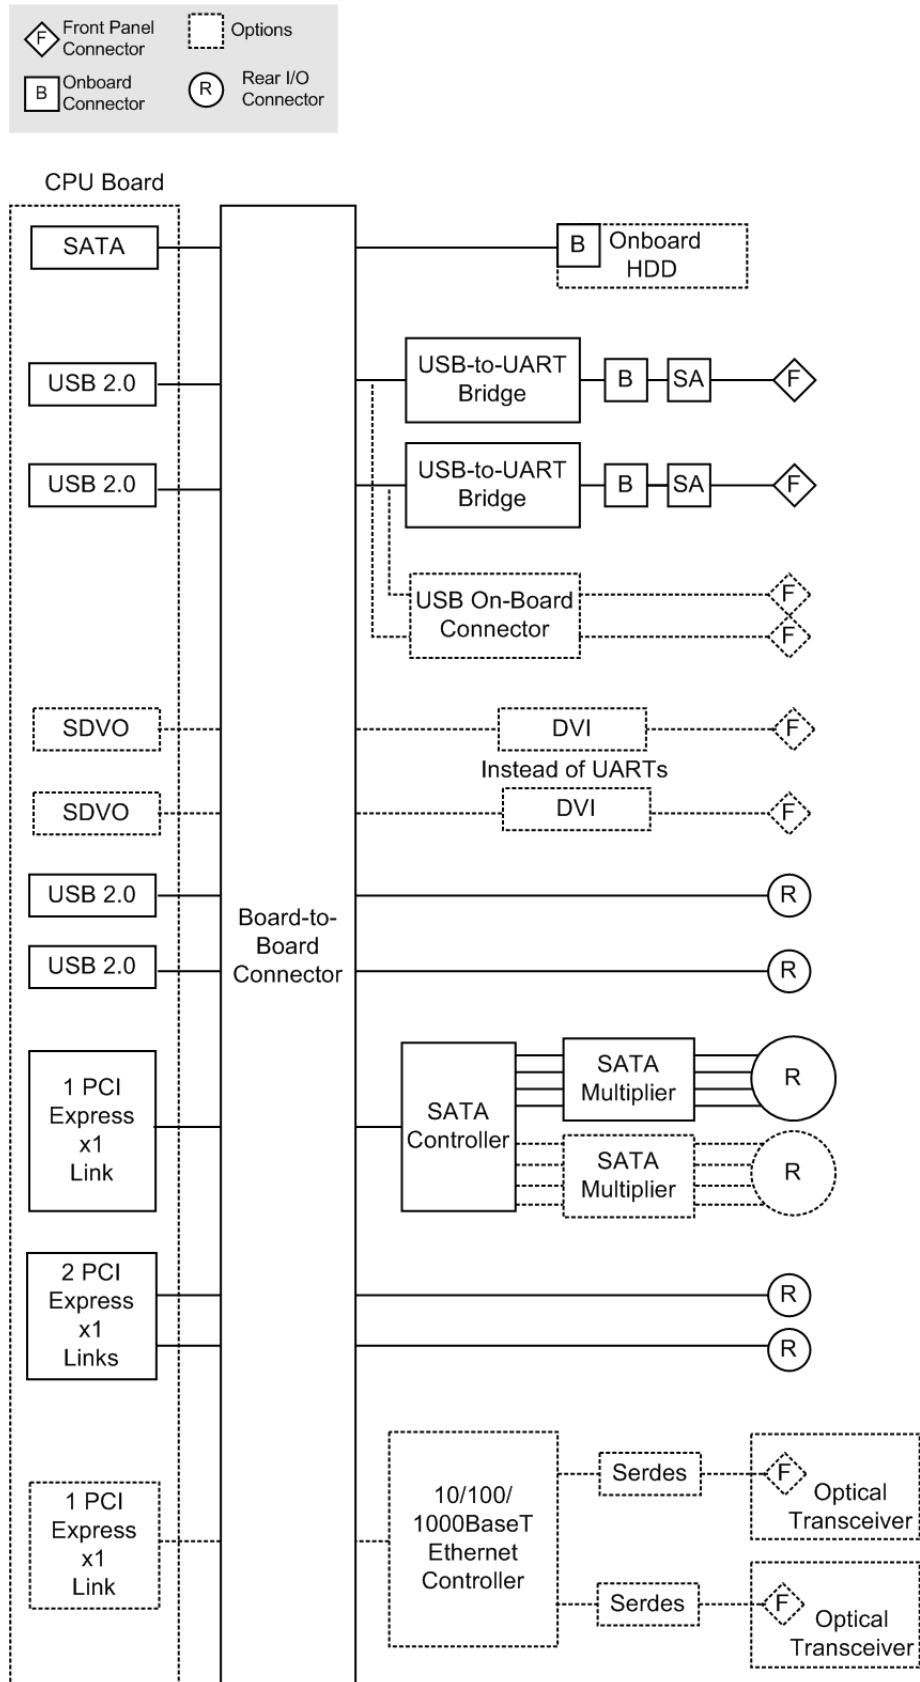

Technical Data

Mass Storage	■ One serial ATA (SATA) port for onboard 2.5" hard-disk drive □ Transfer rates up to 150MB/s (depends on hard disk) □ RAID level 0/1 support (depends on CPU board) ■ Four serial ATA (SATA) ports via rear I/O □ Onboard SATA controller via one PCI Express® lane from the chipset □ Port multiplier □ Transfer rates up to 150MB/s □ RAID level 0/1/5 support
UART	■ Two at front panel ■ Physical interface using SA-Adapter™ via 10-pin connector ■ RS232..RS422, isolated or not ■ Only full duplex operation for RS422 ■ Data rates up to 230.4kbit/s ■ FIFO receive and transmit buffers for high data throughput ■ Handshake lines: full support; lines depend on SA-Adapters™
USB	■ Two 2.0 host ports via rear I/O ■ Data rates up to 480Mbit/s
PCI Express®	■ Two x1 links via rear I/O ■ Data rate 250MB/s in each direction (2.5 Gbit/s per lane)
Miscellaneous	■ CompactPCI® J1 is assembled for increased mechanical stability and/or for power supply ■ CompactPCI® J2 is used for rear I/O
Electrical Specifications	■ Supply voltage/power consumption: □ +5V (-3%/+5%), 3.8A □ +3.3V (-3%/+5%), 0.8A
Mechanical Specifications	■ Dimensions: conforming to CompactPCI® specification for 3U boards ■ Mountable on right side of the CPU ■ Weight: 150g (w/o hard disk and SA-Adapters™)
Environmental Specifications	■ Temperature range (operation): □ 0..+60°C □ Airflow: 1.0m/s ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300m to + 3,000m ■ Shock: 15g/11ms ■ Bump: 10g/16ms ■ Vibration (sinusoidal): 1g/10..150Hz ■ Conformal coating on request
MTBF	■ 1,944,987h @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Conforming to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)
Software Support	■ Driver software can be found in the data sheet of the CPU board that you use.

Configuration & Options

Standard Configurations

Article No.	Interfaces Rear	Interfaces Front	On-Board	Height	Position	Operation Temperature
02F608-00	4 SATA	2 COM	SATA HD slot	4 HP	right of CPU	0..+60°C

Options

Mass Storage	■ Eight SATA ports via rear I/O (not compliant to PICMG 2.30 PlusIO)
I/O	■ Two USB on 4HP front ■ Two DVI on 4HP front instead of UARTs ■ Two DVI and two USB on 8HP front ■ Two DVI and two UARTS on 8HP front ■ Two SFP slots on 12HP front □ For optical 1000Base-LX or 1000Base-SX or copper Gigabit Ethernet interfaces □ SFP not included ■ Two SFP slots, two DVI and two UARTs on 16HP front
Mechanical	■ 4HP..16HP

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

Ordering Information

Standard F608 Models	02F608-00	4 SATA and 2 COM ports, additional SATA hard disk slot on-board, for F14 and compatible SBCs, mounted to the right of the SBC, 0..+60°C
SA-Adapters™	You can find a more detailed overview of possible carrier board/SA-Adapter™ combinations along with software support in our option matrix (PDF) .	
	08SA01-00	RS232, not optically isolated, 0..+60°C
	08SA02-01	RS422/485, full duplex, optically isolated, 0..+60°C
	08SA02-07	RS422/485, full duplex, optically isolated, -40..+85°C screened
	08SA03-00	RS232, optically isolated, 0..+60°C
	08SA03-01	RS232, optically isolated, -40..+85°C screened
	08SA22-00	IBIS master SA-Adapter™, -40..+85°C screened
	08SA22-01	IBIS slave SA-Adapter™, -40..+85°C screened
	08SA25-00	GPS receiver, isolated, -40..+85°C screened
	08SA26-00	RS422 with 15-pin D-Sub connector, with handshake signals (RTS, CTS, DCD, DTR), coated, -40..+85°C screened
Miscellaneous Accessories	0710-0038	SATA (1,5GB/s) hard disk drive 2.5", 100 GB, 4200rpm, -10°C..+70°C
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN. For a Linux driver package supporting the Silicon Imaging Sil3132 SATA controller, please refer to http://www.siliconimage.com/PRODUCTS/product.aspx?id=32 .	
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN. For a Windows® driver package supporting the Silicon Imaging Sil3132 SATA controller, please refer to http://www.siliconimage.com/PRODUCTS/product.aspx?id=32 .	
For operating systems not mentioned here contact MEN sales .		
Documentation	Compare Chart 3U CompactPCI® / PlusIO CPU cards » Download Compare Chart 3U CompactPCI® / PlusIO peripheral cards » Download Compare Chart 3U CompactPCI® / PlusIO extension cards » Download 20F608-00 F608 User Manual	

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.