


M54 – DC Motor Controller

- **1 LM628 supported channel**
- **For every motor type with ± 10 V control input**
- **Position and velocity operation**
- **Quadrature incremental encoder interface**
- **PID values programmable**
- **RS422 or TTL, ± 10 V, 1 relay output**
- **Additional binary I/O**
- **Optical isolation**
- **Not conforming to RoHS**

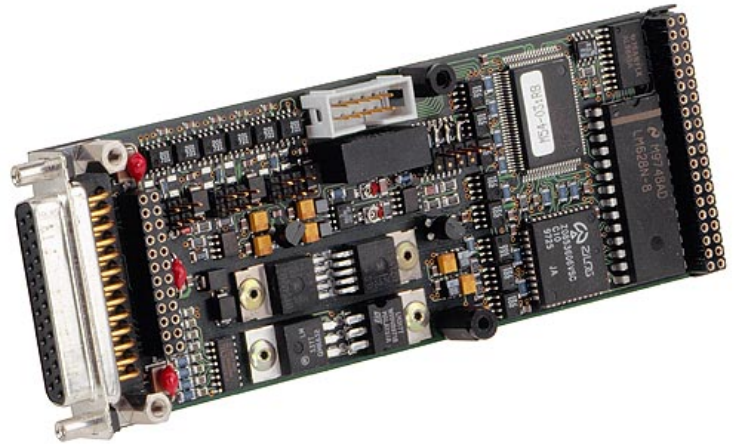


The mezzanine card M54 is a motor controller that is suited for all types of motors that have a ± 10 V DC control input and that can provide a position feedback information using an incremental encoder (e.g. servo motors).

The motor controller component on the M54 is able to move a motor to a specific position at a specific speed. The PID values for the controller can be defined by software and thus be adapted to the motor used.

In addition there are eight binary inputs and two binary outputs, which are isolated from each other, from the analog output and from the system.

The M54 is based on the M-Module™ ANSI mezzanine standard. It can be used as an I/O extension in any type of bus system, i.e. CPCI, VME or on any type of stand-alone SBC. Appropriate M-Module™ carrier cards in 3U, 6U and other formats are available from MEN or other manufacturers.

Diagram

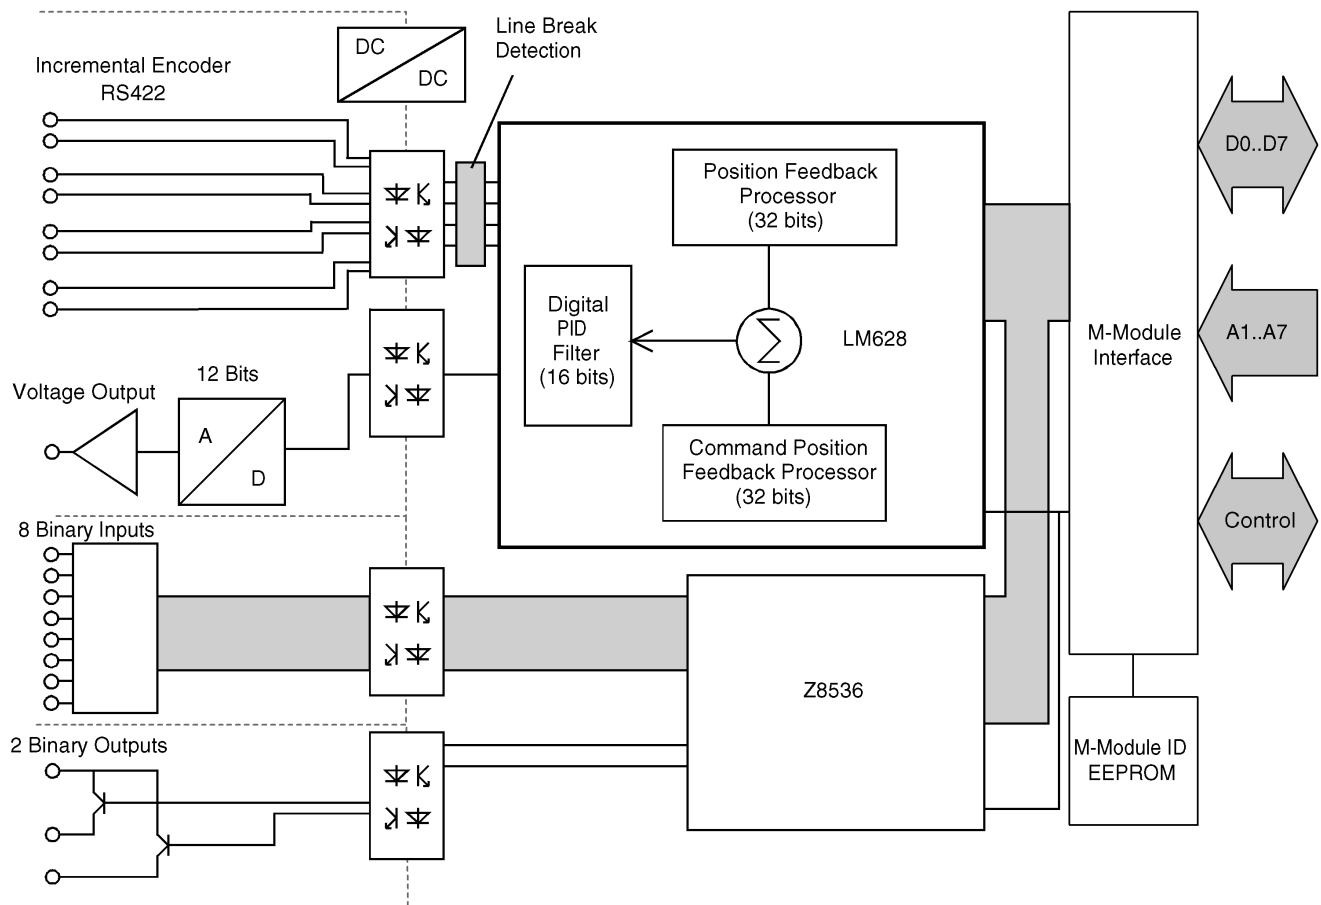

Technical Data

LM628 Motor Controller	■ LM628 precision motor controller ■ 32-bit position, velocity and acceleration registers ■ 256µs control-loop update time ■ Programmable digital PID filter with 16-bit coefficients ■ Operating modes: position and velocity ■ Position feedback interface □ Incremental encoder □ Quadrature signals with optional index □ RS422 or TTL signal level
Motor Interface	■ Optically isolated from all other parts ■ ±10V analog output ■ Resolution: 12 bits, ±2 LSB
Quadrature Incremental Encoder Interface	■ Index pulse ■ RS422 or TTL signal level ■ Line break monitor ■ Plausibility check for glitch detection
Binary I/O	■ I/O controller Zilog Z8536 ■ Optically isolated from all other parts ■ Supply: 12..36V, 50mA typ. ■ Binary inputs: □ 8 inputs connected to port A of Z8536 (6 inputs digitally debounced) □ Switching voltage: 1.2V nominal □ Input frequency: I0/I1 max. 125Hz, I2..I7 max. 50Hz □ Input resistance: 12 kOhm, ±10% ■ Binary outputs: □ 2 outputs connected to port B of the Z8536 □ Protected highside outputs (BTS412) □ Switching current: I_{max} = -1A □ Overload protection: I_{max} = -10A typ.
Peripheral Connections	■ Via front panel on a shielded 25-pin D-Sub receptacle connector ■ Via carrier board (rear I/O)
M-Module™ Characteristics	■ A08, D08, INTA, IDENT
Electrical Specifications	■ Isolation voltage: □ 500V DC from M-Module™ interface □ 100V DC from binary I/O □ 100V DC from motor interface ■ Supply voltage/power consumption: +5V (4.85V..5.25V), 1A typ. ■ MTBF: tbd. (derived from MIL-HDBK-217F)
Mechanical Specifications	■ Dimensions: conforming to M-Module™ Standard ■ Weight: 108g
Environmental Specifications	■ Temperature range (operation): □ 0..+60°C □ Industrial temperature range on request □ Airflow: min. 10m³/h ■ Temperature range (storage): -40..+85°C ■ Relative humidity range (operation): max. 95% non-condensing ■ Relative humidity range (storage): max. 95% non-condensing ■ Altitude: -300m to + 3,000m ■ Shock: 15g/11ms ■ Bump: 10g/16ms ■ Vibration (sinusoidal): 2g/10..150Hz ■ Conformal coating on request

Technical Data

Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)
Software Support	■ MEN Driver Interface System (MDIS™ for Windows®, Linux, VxWorks®, QNX®, OS-9®) ■ For more information on supported operating system versions and drivers see Downloads.

Ordering Information

Standard M54 Models	04M054-00	DC-motor controller with binary I/O, 0..+60°C, no RoHS
Miscellaneous Accessories	05M000-00	M-Module™ cable, 2m, with 25-pin D-Sub plug/housing to pig tail
	05M000-17	25 mounting screw sets to fix M-Modules™ on carrier boards
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	13M054-06	MDIS4™/2004 low-level driver sources (MEN) for M54
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	13M054-70	MDIS4™/2004 Windows® driver (MEN) for M54
Software: VxWorks®	This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M054-06	MDIS4™/2004 low-level driver sources (MEN) for M54
Software: QNX®	This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M054-06	MDIS4™/2004 low-level driver sources (MEN) for M54
Software: OS-9®	This product is designed to work under OS-9®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M054-06	MDIS4™/2004 low-level driver sources (MEN) for M54

For operating systems not mentioned here [contact MEN sales.](#)

Documentation	Compare Chart robotics and motion M-Modules™ » Download	
	20M000-00	M-Module™ Draft Specification, Rev. 3.0
	20M054-00	M54 User Manual

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.