


M11 – 16-bit TTL I/O Interface

- **18 TTL inputs/outputs**
- **4 handshake lines**
- **Programmable timer**
- **24 bits resolution**
- **-40 to +85°C with qualified components**

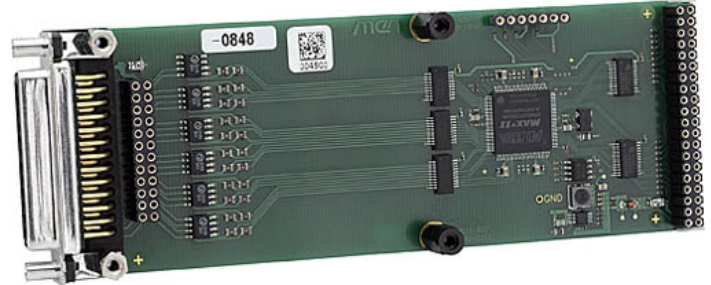


The M11 mezzanine card is a TTL I/O M-Module™ with 16 lines (Ports A and B) that can be used separately as two ports with 8 bits each or together as a 16-bit port. Control of the I/O lines is via the four handshake lines. Depending on the operation mode,

the four handshake lines generate an interlocked handshake, a pulsed handshake, interrupt inputs or simple inputs.

The M11 is based on the M-Module™ ANSI mezzanine standard. It can be used as an I/O extension in any type of bus system, i.e. CPCI, VME or on any type of stand-alone SBC. Appropriate M-Module™ carrier cards in 3U, 6U and other formats are available from MEN or other manufacturers.

Diagram

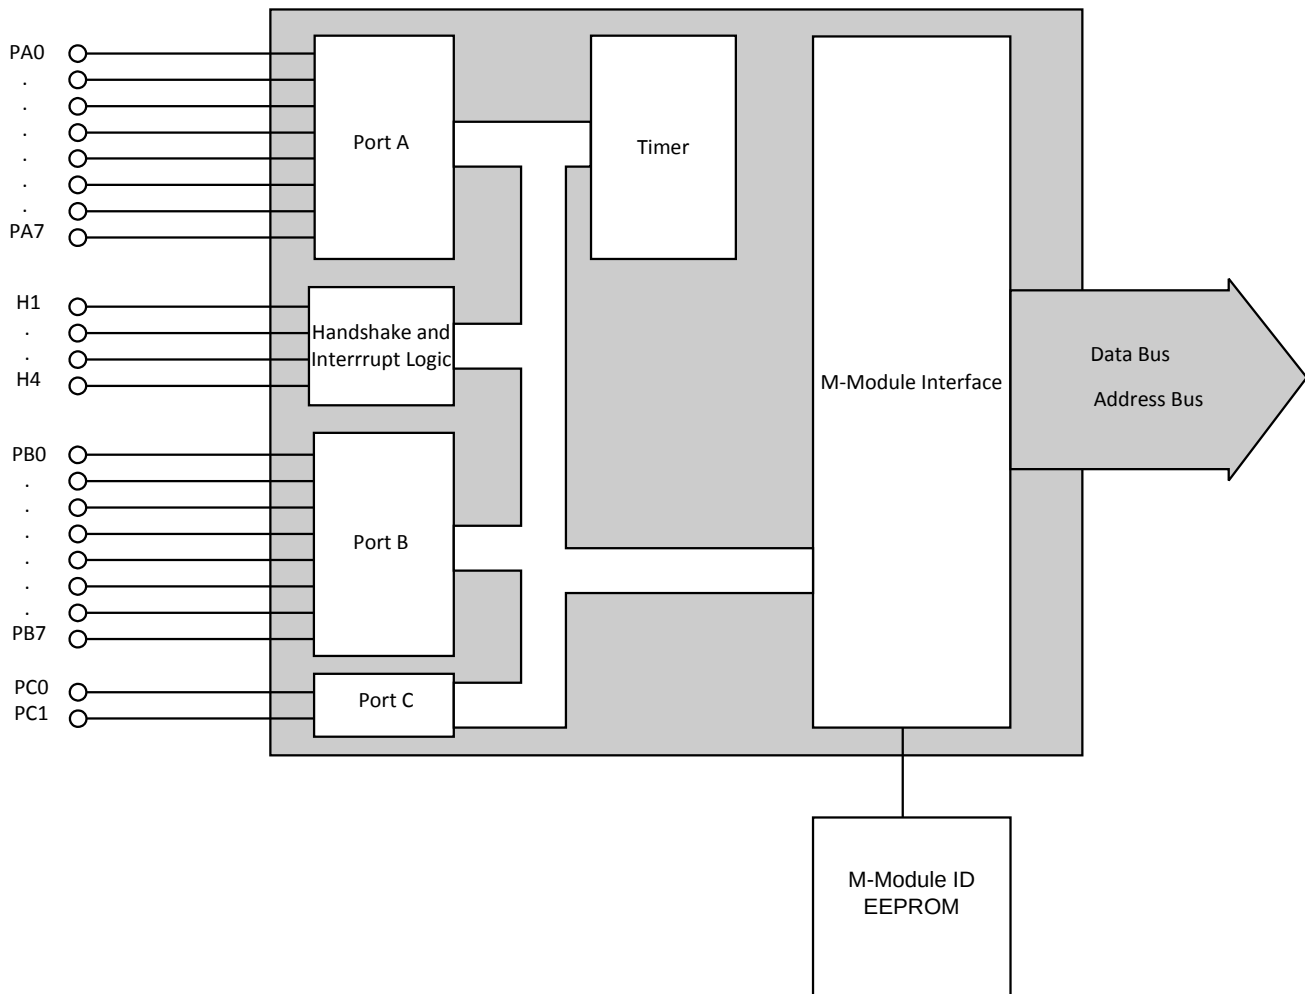

Technical Data

TTL I/O	■ 18 TTL inputs/outputs
68230 Parallel Interface Timer	■ Port modes include: □ Bit I/O □ Unidirectional 8-bit and 16-bit □ Bidirectional 8-bit and 16-bit ■ Programmable handshaking options ■ 24-bit timer ■ Five separate interrupt vectors ■ Separate port and timer interrupt service requests
Input Voltages and Currents	■ Input voltage "high" min. 2 V, max. 5 V ■ Input voltage "low" min. -0.3 V, max. 0.8 V ■ Input leakage current max. 10 µA
Output Voltages and Currents	■ Output current in "off-state" min. -0.1 mA, max. -1 mA ■ Output voltage "high" min. 2.4 V (load < -0.15 mA) ■ Output voltage "low" max. 0.5 V (load < 2.4 mA)
Peripheral Connections	■ Via front panel on a shielded 25-pin D-Sub receptacle connector ■ Via carrier board (rear I/O)
M-Module™ Characteristics	■ A08, D08, INTC, IDENT
Electrical Specifications	■ Supply voltage/power consumption: +5 V (4.85 V..5.25 V), 27 mA typically without driving external loads
Mechanical Specifications	■ Dimensions: conforming to M-Module™ Standard ■ Weight: 68 g
Environmental Specifications	■ Temperature range (operation): □ -40..+85°C □ Airflow: min. 10 m³/h ■ Temperature range (storage): -40..+85°C ■ Relative humidity range (operation): max. 95% non-condensing ■ Relative humidity range (storage): max. 95% non-condensing ■ Altitude: -300 m to +3,000 m ■ Shock: 15 g/11 ms ■ Bump: 10 g/16 ms ■ Vibration (sinusoidal): 2 g/10..150 Hz ■ Conformal coating on request
MTBF	■ tbd @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Conforming to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)
Software Support	■ MEN Driver Interface System (MDIS™ for Windows®, Linux, VxWorks®, QNX®, OS-9®)

Ordering Information

Standard M11 Models	04M011-02	16-bit TTL I/O, -40..+85°C qualified
Miscellaneous Accessories	05M000-00	M-Module™ cable, 2m, with 25-pin D-Sub plug/housing to pig tail
	05M000-17	25 mounting screw sets to fix M-Modules™ on carrier boards
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	13M011-06	MDIS4™/2004 low-level driver sources (MEN) for M11
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	13M011-70	MDIS4™/2004 Windows® driver (MEN) for M11
Software: VxWorks®	This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M011-06	MDIS4™/2004 low-level driver sources (MEN) for M11
Software: QNX®	This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M011-06	MDIS4™/2004 low-level driver sources (MEN) for M11
Software: OS-9®	This product is designed to work under OS-9®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M011-06	MDIS4™/2004 low-level driver sources (MEN) for M11
For operating systems not mentioned here contact MEN sales .		
Documentation	Compare Chart binary I/O M-Modules™ » Download	
	20M000-00	M-Module™ Draft Specification, Rev. 3.0
	20M011-00	M11 User Manual

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.