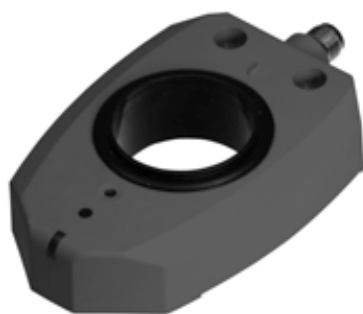


**Model Number**

PMI360DV-F130-IU-V15

Features

- Analog output, load-dependent voltage or current
- Parameterisable measuring range

Technical data**General specifications**

Measurement range	max. 360° min. 45°
Adjustment range	360°, 2 switch frames programmable
Rotational speed	≤ 100 min ⁻¹

Nominal ratings

Operating voltage U_B	18 ... 30 V DC
Reverse polarity protected	reverse polarity protected
Repeat accuracy	± 0.25 °
Resolution	0.2 °
Temperature drift	0.02 ° / °C (-25 °C ... 70 °C)
No-load supply current I_0	≤ 45 mA

Indicators/operating means

LED PWR/ERR	status display LED, green/red (Power on / missing actuator / keylock)
LED U/I	Activator within measuring range

Analog output

Output type	current output or voltage output (depends on load) 4 ... 20 mA ($R_L < 400 \Omega$) 0 ... 10 V ($R_L > 3.3 k\Omega$)
Linearity error	± 0.6 °, (with original actuator)

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
---------------------	--------------------------------

Mechanical specifications


Connection type	M12 x 1 connector, 5-pin
Protection degree	IP67
Material	
Housing	PBT
Target	structural steel, e. g. 1.0037, SR235JR (formerly St37-2)
Mass	180 g

Compliance with standards and directives


Standard conformity	
Standards	EN 60947-5-2:2007 IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose, Class 2 Power Source
CCC approval	Products with a maximum operating voltage of ≤36 V do not bear a CCC marking because they do not require approval.

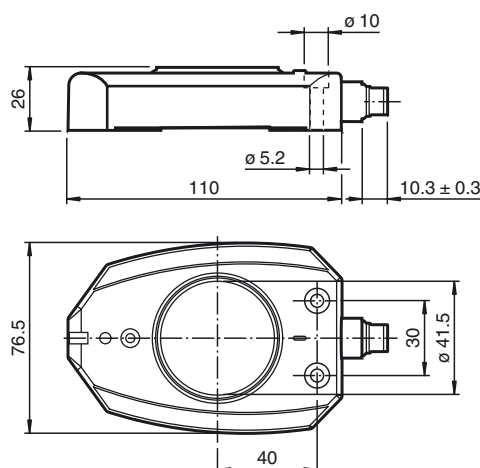Dimensions


Electrical Connection



Using a different actuating element

You can use a different actuator instead of the BT-F130-A actuator provided, which must be positioned centrally in the sensor opening. When using a different actuating element, the element must fulfill all requirements relating to the material, dimensions and distance to the sensitive surface on the sensors (see table). Failing to fulfill all of these requirements may reduce the accuracy/resolution of the sensor or even cause the sensor to stop functioning.

Dimensions when using a different actuating element

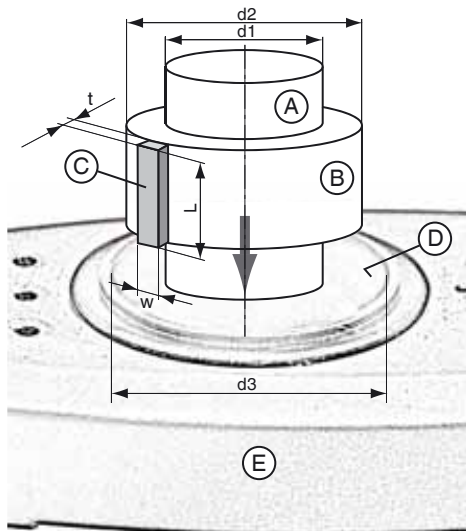

- A Drive shaft
- B Insulation ring made from non-conductive material
- C Separate actuator ($L \geq 23$ mm)
- D Sensitive surface on the sensors (black, cylindrical inner surface)
- E Sensor



Actuator (C) can be placed on the insulating ring made from non-conductive material (B) or inserted in this ring.

Dimension	
t	2 mm
w	7.5 mm
L	≥ 23 mm
d1	Depending on the drive shaft material S235JR+AR (previously St37-2): max. 19 mm Stainless steel 1.4435 / AISI 316L (V4A): max. 21 mm Stainless steel 1.4305 / AISI 303 (V2A): max. 23 mm
d2	Select so that the distance between the edges of the actuator and the sensitive surface on the sensor is 1 ... 2 mm.
d3	41.5 mm
Actuator material	Mild steel such as S235JR+AR (previously St37-2)

Accessories

BT-F130-A

Actuator for F130 series

V15-G-2M-PVC

Cable socket, M12, 5-pin, PVC cable

V15-W-2M-PVC

Cable socket, M12, 5-pin, PVC cable