



GE

LanPro[®] Uninterruptible Power Supply

Technology for the Digital World



For more than a century, GE has led the way with innovative technologies and groundbreaking quality initiatives – literally helping to power the world. Along the way, through the development and delivery of state-of-the-art products and uncompromising service, GE has also built a legacy as a leading supplier of critical power solutions.

To bridge the gap between the traditional utility grid and the needs of today's business, GE offers a complete portfolio of critical power products and services, from desktop Uninterruptible Power Supply (UPS) units to engineered power systems, and from basic UPS and battery maintenance to comprehensive service contracts covering every aspect of your power quality and delivery system.

At GE, our goal is simple – to never let power quality stand in the way of our customers' success. That's why GE is committed to continue developing and delivering:

UPS TECHNOLOGY FOR THE DIGITAL WORLD



The Power of GE

Since the founding of the General Electric Company by Thomas Edison in 1882, GE Industrial Systems has been known for technical innovation. GE Industrial Systems has over 7,600 U.S. and foreign patents on products that help provide peace of mind for people, the properties they own and their workplaces. In 2001 alone, GE Industrial Systems filed more than 200 U.S. and 340 foreign patent applications.

GE Industrial Systems spans the globe as an industry leader in integrated industrial, electrical and security equipment, systems and services. The business brings to customers the latest technologies that are used to distribute, protect and control energy and equipment, and to provide premise management. GE provides innovative product and service solutions for commercial, industrial, residential and utility customers.

GE Industrial Systems is proud of its impressive track record for introducing leading edge technical products, accomplishing growth, having strategic customer relationships and a global presence as broad and expansive as its portfolio of products.

A strong supporter of company-wide initiatives - Six Sigma, Globalization, e-Business/Digitization and Services – GE is committed to maintaining a leadership position in all four to achieve maximum results while embracing the values that are at the heart of GE.



UPS Product Technology

GE is a leader in the field of critical power protection. It's UPS Product Technology business designs, manufactures and delivers premium power quality products and related software products that ensure organisations all over the world enjoy a safe and managed power supply.

Protect your critical power application with a GE UPS – ranging from 500VA to 4MVA. Using state of the art technology GE has developed different UPS with high reliability and maximum application flexibility.

With a GE power solution in place, your mission-critical equipment is protected from any fluctuation in your power source, enabling you to concentrate on your core activities. Leave your critical power needs with GE, a reliable power quality supplier for more than 100 years.

LanPro® *Uninterruptible Power Supply*

The GE LanPro® family of high-performance UPS systems provides critical power protection for a wide range of applications. The GE LanPro is easy to install and service, optimised for the office environment. The robust design also allows for more traditional industrial applications. The system power and reliability can be easily expanded by adding units, creating a redundant system with no single points of failure, utilizing GE's unique Redundant Parallel Architecture™ (RPA™) technology.

Designed as a true VFI (Voltage and Frequency Independent) UPS, the GE LanPro family is an on-line double conversion, intelligent and heavy duty unit. The VFI design concept enables the highest levels of protection even under the toughest conditions.

APPLICATIONS

- Computer and data centres
- Call centres
- Manufacturing and process control units
- Medical equipment and healthcare facilities
- Transportation infrastructure
- Security systems
- Financial institutions
- Fixed and mobile voice and data transmission

FEATURES & BENEFITS

- Low input current distortion and high input power factor eliminates need for costly filters or oversized generator
- Small footprint, easily transportable
- Advanced technology enabling silent operation
- High output power factor allows for optimal sizing of UPS
- Low output voltage distortion
- Superior Battery Management
- ECO mode enables automatic energy savings under stable power conditions



LanPro 31





SUPERIOR BATTERY MANAGEMENT

- Automatic battery test, prevents "surprises"
- Battery calibration test, enables tracking of battery aging
- Temperature compensation, prevents overcharging
- Load dependent end-of-discharge voltage and no load shutdown prevents deep discharge of batteries

No surprises

Prevents damage

Extends life time of batteries



LanPro 11

COMPLETE RANGE

- **LanPro-11**
Single phase input / single phase output
3, 5, 6, 8, 10 kVA
(5-10kVA also available with 3 phase input)
- **LanPro-31**
Three phase input / single phase output
8, 10, 15, 20 kVA
- **LanPro-33**
Three phase input / three phase output
10, 20, 30 kVA

FULL FUNCTIONALITY

- Multi language LCD, easy to use
- Excellent overload behaviour, withstands toughest conditions
- Cold start function
(start-up without mains present)
- Manual bypass integrated in UPS
- Equipped with RS232 serial port
- Fits well in office environment

OPTIONS


- SNMP plug in card for integration into networks
- Potential free alarm contacts
- Matching battery packs for extended back up times
- Redundant Parallel Architecture™



RPA™

Redundant Parallel Architecture™

GE provides a unique technology called Redundant Parallel Architecture (RPA™) that can parallel Uninterruptible Power Supply (UPS) modules with true redundancy. With RPA™, there is no need for external electronics or switches to control the UPS modules in the parallel system. One of the UPS modules in the system arbitrarily takes a leadership role, while the other UPS modules have access to all control parameters. If one UPS fails to operate, the load is automatically redistributed among the others. If the lead UPS fails to operate then a different UPS automatically takes on the leadership role. The RPA systems are designed to have no single points of failure, ensuring the highest level of power protection for critical loads.

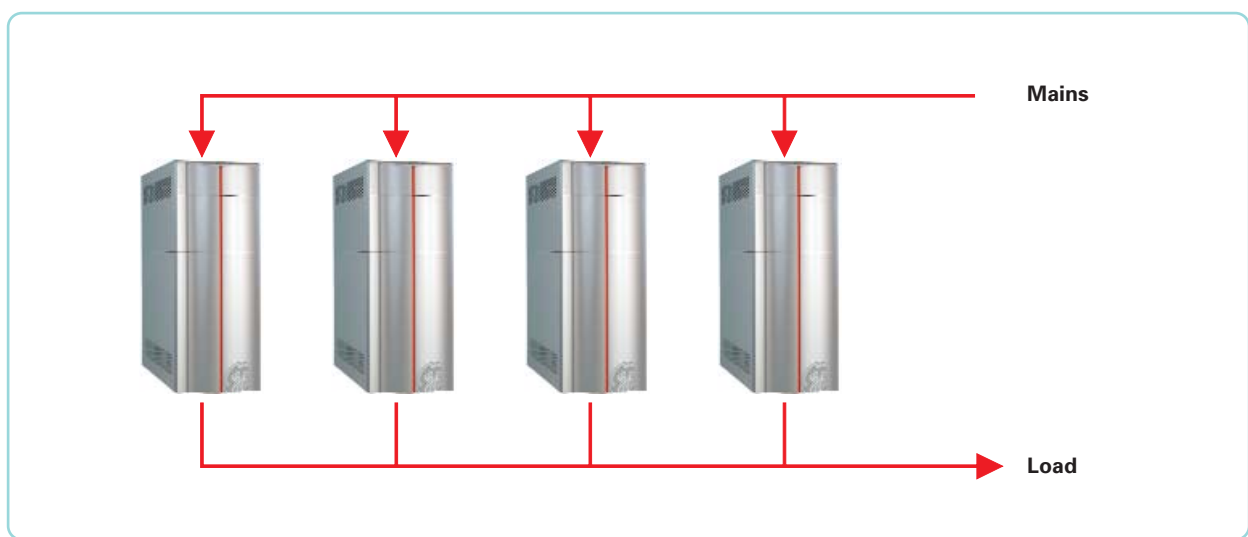

Many other so-called redundant UPS offerings have one critical shortfall, in that they have critical components that are not redundant. RPA technology provides complete redundancy of all critical components and there are no single points of failure. RPA technology allows UPS system expansion not only to increase capacity but also to improve the reliability of the power provided to critical loads. For mission critical applications, RPA technology provides true redundancy for the highest reliability.

- **RPA Configuration** provides complete redundancy of all critical components and allows paralleling of up to four units for increased load capacity. It ensures excellent dynamic behaviour based on output voltage load sharing. This provides the highest reliability and availability for mission-critical applications.
- **Modular** design allows for system upgrades to meet future power needs without any interruption to the critical load or transfer to bypass.
- **Easy to install and maintain.**
- **Scaleable** design allows for **efficient use of capital.**
- **Peer-to-Peer architecture** where any UPS can be the “logic leader” ensuring **no single points of failure.**



Connectivity Solutions

Increased system availability and process protection

PROTECTION SOFTWARE


The main function of the GE protection software is data and operating system protection. PowerJUMP DataShield™ and PowerFLAG™ diminish the risk of lost data or system crashes. The software provides events handling and computer shutdown for all major operating systems, protecting the security of precious data. Multi-vendor and multi-platform environments as well as client-server structures are managed, using SNMP-based network communication protocols.



PowerJUMP Manager™

GE UPS SOFTWARE PRODUCTS

- Data protection software for multiple operating systems
- UPS management software, including integration into network management systems
- Web based remote monitoring and diagnostic services

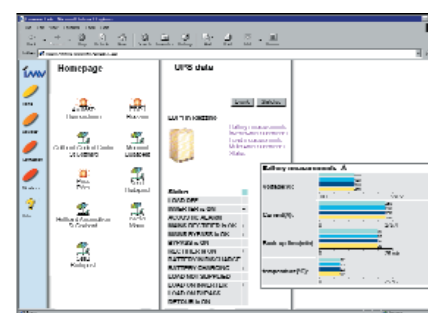

IRIS

MANAGEMENT SOFTWARE

The GE UPS management software provides direct access to remote UPS and active management of each UPS in multi-unit configurations to ensure efficient and predictable power quality. A network manager or facilities engineer can use PowerJUMP Manager™ to monitor and control the local or remote UPS, and the equipment and processes it protects. Typically, an SNMP client/agent structure, direct serial link or modem connection is used for this purpose. The PowerJUMPin™ software allows easy integration into all leading Network Management Systems. The UPS can also be monitored on the Internet using the GE IRIS system.

Service for Mission Critical Power

Whether you are a large corporation with multiple sites or a small business owner with a single location, GE will enable you to have a constant supply of clean and reliable power to keep your business up and running. GE offers a comprehensive portfolio of power quality services including:



- UPS installation and start-up, upgrades, spare parts and on-site services
- Battery installation, management and maintenance
- Power grounding
- Harmonic analysis
- Remote monitoring & diagnostics
- Global preventative and corrective services
- Training

Technical Specifications

Model CE:	LP3-11	LP5-11/31T	LP6-11/31T	LP8-11/31T	LP10-11/31T	LP8-31	LP10-31	LP15-31	LP20-31	LP10-33	LP20-33	LP30-33
Rating (kVA / kW)	3/2.4	5/4	6/4.8	8/6.4	10/8	8/6.4	10/8	15/12	20/16	10/10	20/20	30/30
Battery (V/Ah) Typical backup time	144/7	240/7	240/7	240/12	240/12	2x240/7	2x240/7	2x240/14	2x240/14	2x240/7	2x240/14	2x240/21
50/100% load (min)	25/10	25/10	20/8	29/11	22/8	35/14	25/10	30/13	25/10	18/7	18/7	18/7
Enclosure	A	A/B*	A/B*	C/D*	C/D*	E	E	E	E	F	F	G
Net weight incl. batt. (kg)	85	110/180*	115/185*	165/270*	170/275*	240	240	345	350	247	372	520
Input voltage (Vac)	172-285	172-285/ 340-470*	172-285/ 340-470*	172-285/ 340-470*	172-285/ 340-470*	300-470	300-470	300-470	300-470	324-478	324-478	324-478
Input power factor	.99	.99	.99	.99	.99	.95	.95	.95	.95	.99	.99	.99
Input frequency (Hz)	40-70	40-70	40-70	40-70	40-70	45-65	45-65	45-65	45-65	45-65	45-65	45-65
Output voltage (Vac)	220/230/240 (user selectable)									380/400/415 (user selectable)		
Output voltage regulation	+/-1%											
Output frequency (Hz)	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Environment	IP20 (IEC60529)											
Humidity	95% non-condensing											
Ambient operating temperature	-10 ^o – +40 ^o C (14 ^o –104 ^o F)						0 ^o – +40 ^o C (32 ^o –104 ^o F)					
Audible noise	40-55 dB(A) load and temperature dependent											
Standards safety	EN 50091-1; EN 60950; IEC 950											
Protection degree	IP20											
Standards EMC	EN 50091-2/IEC 62040-2											
IEM†										✓	✓	✓
ECO mode	✓	✓	✓	✓	✓	✓	✓	✓	✓			
SBM††	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Boost charging	✓	✓	✓	✓	✓							
Potential free contacts	optional	optional	optional	optional	optional	✓	✓	✓	✓	✓	✓	✓
RS 232	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
RPA (optional)	✓	✓	✓	✓	✓					✓	✓	✓
Plug-in SNMP Card	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Battery Extension (optional)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Backfeed protection	optional	✓†††	✓†††	✓†††	✓†††	✓	✓	✓	✓	✓	✓	✓
Separate bypass input						✓	✓	✓	✓	optional	optional	optional
PowerFLAG™	✓	✓	✓	✓	✓	✓	✓	✓	✓			
PowerJUMP DataShield™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Specifications subject to change without notice.

* = LP-11/LP-31T respectively
† = Intelligent Energy Management
†† = Superior Battery Management
††† = Optional for LP5-11, LP6-11
†††† = Not available for LP8-11, LP10-11

Enclosures (hwxwd)

A: 537 x 313 x 590 mm D: 995 x 313 x 720 mm G: 1280 x 660 x 780 mm
B: 855 x 313 x 590 mm E: 1190 x 410 x 890 mm
C: 680 x 313 x 720 mm F: 1280 x 500 x 780 mm

LPX-11 = Single phase in/single phase out
LPX-31 = Three phase in/single phase out
LPX-33 = Three phase in/three phase out
X = kVA rating
T = Transformer



GE



Via Cantonale 50
6595 Riazzino (Locarno)
Switzerland
+41 (0) 91 850 5151

1 Oak Hill Center, Suite 301
Westmont, IL 60559, USA
+ 1 773 299-6600
866. GEDE.UPS (866.433.3877)

www.gedigitalenergy.com