

Description: Introduction to using GenBroker communications with TCP/IP protocol.

OS Requirement: Win 2000, XP Pro, Server 2003, Vista, Server 2008, Windows 7

General Requirement: Knowledge of GENESIS32, which should be installed on the machines being configured and general knowledge of windows networking.

Why Use GenBroker?

First, there was DCOM, a promising technology embraced by ICONICS and the OPC Foundation. GENESIS32 components fully use the DCOM inter-process communication. It allows a seamless connection to the OPC Servers available to the automation market.

The unparalleled capabilities of GENESIS32 and DCOM led to impressive cost reductions in advanced engineering projects. However, DCOM also exposed some technical limitations, which made it difficult to use in complicated networks where OPC servers were being connected to the factory's intranet or to the public Internet. To provide a robust industrial solution, DCOM needed a helping hand. ICONICS developed GenBroker, which incorporated OPC and Security communications through TCP/IP or SOAP/XML channels. It achieves real-time and secure communications to and from OPC servers (data access, alarm & event, historical data).

DCOM Problems:

The complex settings often make its configuration ineffective when the client is remote.

It does not work well across NT domains.

Connection over slow or unreliable networks (i.e. the Internet) is practically impossible.

It is not easily configurable for passing data through firewalls.

The GenBroker Solution:

It works well within, across, and in the absence of NT domains.

It works well on slow and/or unreliable networks (i.e. the Internet).

The client side works well behind a firewall.

Any computer running OPC Servers can now be quickly intranet or Internet enabled by simply running the GenBroker service. The computer will then only need some kind of network connection such as a dialup modem, network card, or other Internet connection.

GenBroker is natively available to GENESIS32. Because of this, the user can browse the intranet and Internet for OPC Servers and OPC Tags that may be required in a GENESIS32

application. In fact, even third party OPC Data Access client applications can be instantly WEB enabled using GenBroker technology. These clients can address their Data Access OPC tags through DataWorX32.

GenBroker communications also make ICONICS WebHMI possible. Because of its web nature, WebHMI is used in applications where thin clients need to get access to SCADA/HMI graphics, alarms, and trend data. The SCADA/HMI engineers can develop their process interface using the standard GENESIS32 development tools from any remote location. They can then publish the developed application to the WebHMI server. The visitors of this web site will have instant access to the application including full security, read/write capabilities, and alarm acknowledgement, just like GENESIS32.

GenBroker Philosophy

The basic philosophy of GenBroker communication lies within its use of reliable **Request / Response** protocols: The client sends requests and the servers reply to them. GenBroker applies to all GENESIS32 applications.

For example, in WebHMI a thin client sends out a request over the Internet to the WebHMI server. The thin client uses GenBroker to transmit the request. The WebHMI server respond to the request via GenBroker as well. However, if the thin client's request requires a response from a remote server in a local area network (LAN), WebHMI could be configured to use DCOM. The machine will use DCOM to return the response to the WebHMI server, which will use GenBroker to relay the response to the thin client.

GenBroker enables you to designate which method to use for networked communications, as well as to define a central License and/or Security server for a networked set of workstations.

GenBroker/GenClient Architecture

The GenClient/GenBroker architecture consists of two main parts: GenClient.dll and GenBroker.exe. The GenClient.dll resides on the client side. It can communicate directly with OPC servers (using the traditional DCOM method), or it can establish a connection with GenBroker, which then communicates with the OPC servers on behalf of the client. Unlike DCOM, GenBroker can communicate over the Internet.

The client computer that wants to reach out to this OPC Data will have a GenBroker configuration set up to identify the computers that expose OPC Data. An example is shown in Figure 1, where a computer called **Myopcsrver** exposes

relevant OPC data via TCP/IP Communications. Figure 1 also illustrates the four different channels previously discussed.

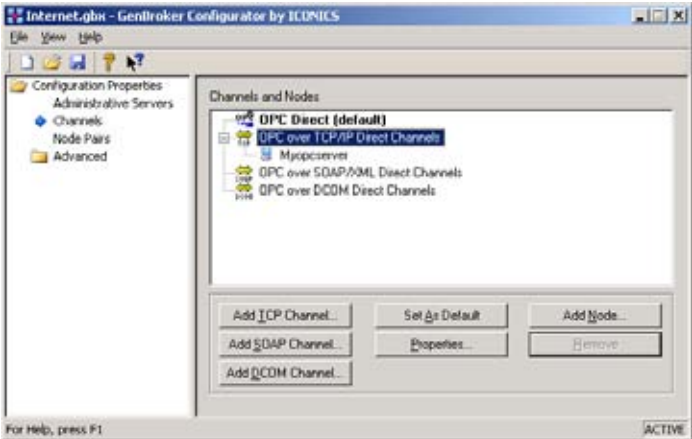


Figure 1 - Example of GenBroker Configuration

GenBroker for GENESIS32 to GENESIS32 Communication

You can use GenBroker for OPC communications between two GENESIS32 machines. This type of GenBroker communications is illustrated in Figure 2. In this example, the GENESIS32 machine at the top of the flow chart runs all of the GENESIS32 OPC Client applications, and the GENESIS32 machine at the bottom of the flow chart runs the OPC Servers and GENESIS32 Server applications. GenBroker communications can be enabled on any GENESIS32 system to make OPC data on one GENESIS32 machine available to other GENESIS32 machines. For more information on how to set this up, refer to the application note entitled *GenBroker Quick Start*.

virtually the same in this case as it is between two GENESIS32 systems. In the example shown in Figure 2, the top of the flow chart represents client applications running on the WebHMI client, and the bottom of the flow chart represents applications running on the WebHMI server.

NOTE: GenBroker communication does not have to be enabled for GENESIS32 to GENESIS32 OPC communication in order to use it for WebHMI and vice versa. Each of the two types of GenBroker communications requires their own individual .gbx file, and they are completely independent of one another.

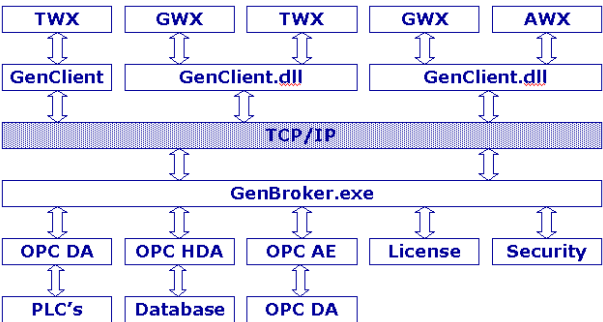


Figure 2 - GenBroker Communications Flow Chart

GenBroker for WebHMI Communication

As previously mentioned, GenBroker Communications is also used in ICONICS WebHMI to communicate OPC data from the WebHMI server to the clients. The means of communications is