SLIMKEY-MD
TECHNICAL SPECIFICATIONS

KEY SWITCH
MATERIAL: Industrial silicone rubber
LIFE: Greater than 10 million cycles
TRAVEL: 0.055" (1.4mm)
ACTUATION FORCE: 5 oz (130g)
FEEDBACK: Tactile with mechanical snap

POWER
PS/2 KEYBOARD: 5V@20ma (from CPU port)
HULAPOINT: 5V@10ma (from mouse conn. port)
USB KEYBOARD: 5V@20ma (from USB port)
HULAPOINT: 5V@20ma (from USB port)

TEMPERATURE RANGE
-40F to +194F (-40C to +90C)

HUMIDITY: 100%Resistant

SHOCK: 3x11 ms pulses of 50g on each of 3 axes

VIBRATION
POWER SPECTRAL DENSITY: 0.04g/Hz
FREQUENCY RANGE: 20Hz - 2kHz
DURATION OF TEST PER AXIS: 3 hours

FLAMMABILITY
PRINTED CIRCUIT BOARD: 94 VO
SILICONE OVERLAY: 94 HB
INTERFACE CABLE: 94 VO

WEIGHT
EITHER CASE: 1.6 lbs (0.7 kg)

APPROVALS
NEMA 4, 4X and 12 (IP65 and IP 52)
FCC Class 15, Part B
CE Rating
UL-1950

DIMENSIONS
SLIM CASE: (W-H-D) 14.5" x 5.5" x 0.83"
368.3mm x 139.7mm x 21.0mm
MOBILE CASE: (W-H-D) 14.5" x 5.5" x 1.56"
368.3mm x 139.7mm x 39.62mm

CABLE
LENGTH: 10 feet (3.94 meters)
DESIGN: "Y" Cable (providing separate keyboard and mouse connections), Or Single-Cable USB

COMPATIBILITY
KEYBOARD: PS/2: All Windows Operating Systems
USB: All Windows and Mactintosh OS
HULAPOINT: PS/2: All Windows Operating Systems
USB: All Windows and Mactintosh OS

WARRANTY: 1 Year Limited Warranty

SLIMKEY-MD MODELS:
**Feature red LED backlighting*

SK-102 & *SLK-102:
Slim Case with built in HulaPoint™ pointing device

SK-102-M & *SLK-102-M:
Mobile Case with built in HulaPoint™ pointing device

SK-101 & *SLK-101:
Slim Case without HulaPoint™ pointing device

SK-101-M & *SLK-101-M:
Mobile Case without HulaPoint™ pointing device

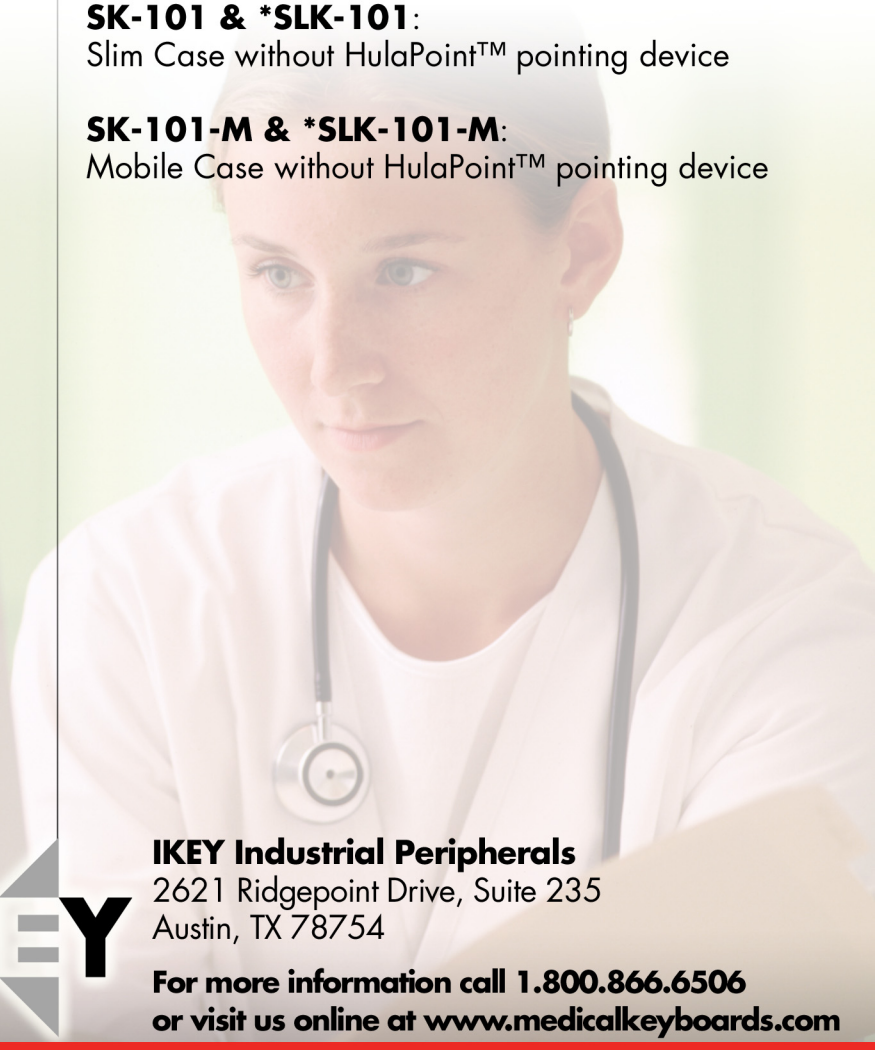

IKEY Industrial Peripherals
2621 Ridgepoint Drive, Suite 235
Austin, TX 78754

For more information call 1.800.866.6506
or visit us online at www.medicalkeyboards.com

© 2004 IKEY. All rights reserved.