EMUD-2201
mPCIe to SD/uSD Module

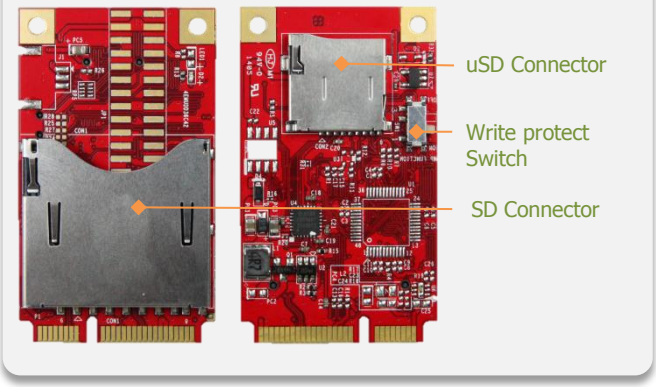

Features

- mPCIe F/F, USB 2.0 to alternative SD/uSD 2.0
- Plug & Play, SD hot swappable.
- Ultra low power consumption.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

EMUD-2201-C1

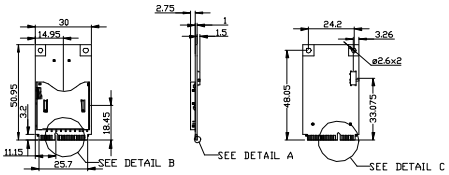

EMUD-2201-C1-01

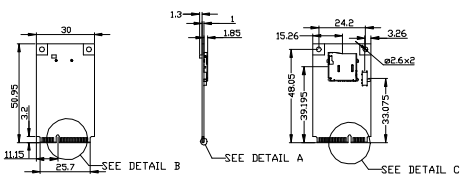

EMUD-2201-C1-02

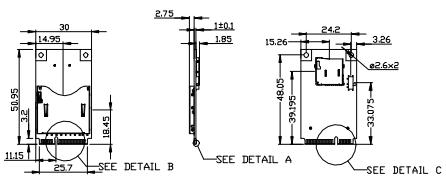

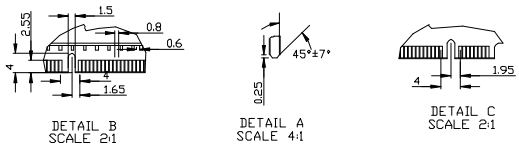

Specifications

Form-Factor	mPCIe
Input I/F	USB 2.0
Output I/F	SD 2.0
Output Connector	SD x 1, uSD x 1 (alternative)
Max TDP	1.8W (3.3V x 550mA)
Dimension (WxLxH)	30 x 50.95 x 5.6 Weight: 8g
Temperature	Operation: STD: 0˚C ~ +70˚C Storage: -55˚C ~ +95˚C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

Order Information

EMUD-2201-C1
mPCIe to SD Module
EMUD-2201-C1-01
mPCIe to uSD Module
EMUD-2201-C1-02
mPCIe to SD/uSD Module

Headquarters (Taiwan)
5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:
USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-45-594-7581
China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

January 6, 2015