


F209L – 3U CompactPCI® WLAN Interface

- 4 HP 32-bit/33-MHz CompactPCI®
- IEEE 802.11b
- Outdoor range up to 600 m
- Up to 11 Mbit/s per channel
- Output power 20 dBm
- Frequency band 2.4 GHz (DSSS)
- 40-bit or 128-bit WEP encryption
- 2 Reverse SMA antenna connectors
- -40 to +85°C screened

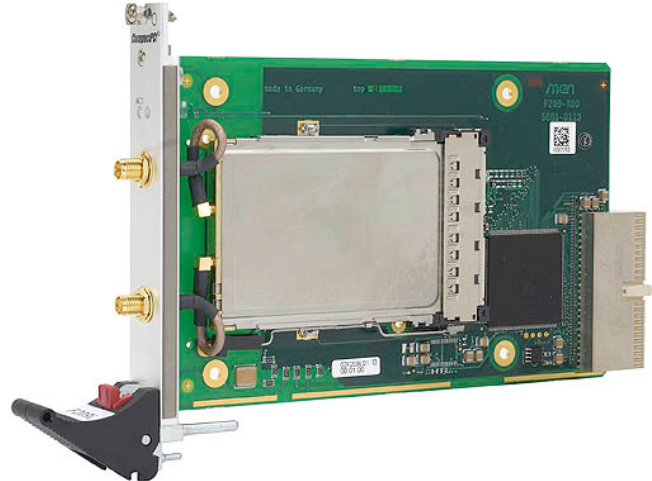


The F209L is a rugged single Eurocard CompactPCI® WLAN interface based on a PCMCIA card and needing only one slot on the CompactPCI® bus. It features access safety and offers two rugged antenna connectors at the front panel for the use of external antennas with a radius of up to 600 meters. The WLAN IEEE 802.11b standard translates into a data rate of up to 11 Mbit/s per channel, an output power

of 20 dBm and a 40-bit or 128-bit WEP encryption. The frequency band width is 2.4 GHz with Direct Sequence Spread Spectrum (DSSS). The F209L supports auto fall-back. The WLAN interface is a high-power, high-sensitivity solution that maintains communication in problematic environments.

The F209L is screened for -40 to +85°C operation temperature and prepared for conformal coating in order to be used also in harsh and mobile environments.

Diagram

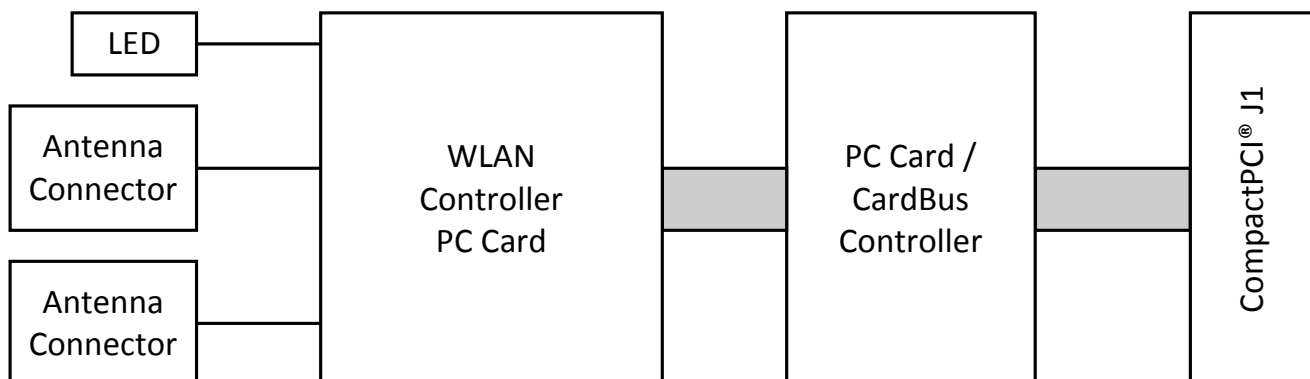

Technical Data

WLAN Interface	■ IEEE 802.11b compliant ■ Prism 2.5 chipset ■ 40-bit or 128-bit WEP encryption, MAC filter and Access control ■ Data rate up to 11 Mbit/s per channel, auto fall-back ■ Frequency band width 2.4 GHz with Direct Sequence Spread Spectrum (DSSS) ■ Outdoor range up to 600 m ■ Two antenna connectors at front panel □ For the use of external antennas □ Rugged screw connection ■ Output power: 20 dBm (100 mW) typ. ■ Receiver sensitivity: □ -91 dBm @ 11 Mbit/s □ -92 dBm @ 5.5 Mbit/s □ -93 dBm @ 2 Mbit/s □ -95 dBm @ 1 Mbit/s ■ Supported modulations: CCK (11 Mbit/s, 5.5 Mbit/s), DQPSK (2 Mbit/s), DBPSK (1 Mbit/s) ■ One activity LED ■ Implemented through onboard PC Card □ Allows easy configuration of IEEE standard through different PC Cards □ IEEE 802.11a, IEEE 802.11b, or IEEE 802.11g
Front Connections	■ Two Reverse SMA antenna connectors
CompactPCI® Bus	■ Compliance with CompactPCI® Core Specification PICMG 2.0 R3.0 ■ Peripheral slot ■ 32-bit/33-MHz PCI-to-PCI bridge ■ V(I/O): +3.3 V (+5 V tolerant)
Electrical Specifications	■ Supply voltage/power consumption: □ +5 V (-3%/+5%), transmit operation: 400 mA max., receive operation: 300 mA max., sleep mode: 50 mA max. □ +3.3 V (-3%/+5%), 50 mA max.
Mechanical Specifications	■ Dimensions: conforming to CompactPCI® specification for 3U boards ■ Front panel: 4HP with ejector ■ Weight: 180 g
Environmental Specifications	■ Temperature range (operation): □ -40..+85°C (screened) □ Airflow: min. 10 m³/h ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300 m to +3,000 m ■ Shock: 15 g/11 ms ■ Bump: 10 g/16 ms ■ Vibration (sinusoidal): 2 g/10..150 Hz ■ Conformal coating on request
MTBF	■ MTBF (without WLAN PC card): 3,560,811 h @ 40°C according to IEC/TR 62380 (RDF 2000)
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)
Software Support	■ Driver software for Windows® and Linux ■ For more information on supported Windows® operating system versions and drivers see Downloads.

Configuration & Options

Standard Configurations

Article No.	WLAN Type	Front Panel	Operation Temperature
02F209L00	IEEE 802.11b	4HP	-40..+85°C

Options

Interface	■ Capabilities variable through use of different PC Card □ WLAN □ ZigBee □ Bluetooth □ GPS □ GSM ■ Variable WLAN output power □ Up to 25.5 dBm (370 mW) for higher outdoor range □ The allowed output power must be verified for each country and may need official permission ■ For applications that require high access safety.
------------------	---

Cooling Concept

- Also available with conduction cooling in MEN CCA frame

Please note that some of these options may only be available for large volumes. Please ask our sales staff for more information.

Ordering Information

Standard F209L Models	02F209L00	WLAN interface IEEE 802.11b, 2 reverse SMA antenna connectors, -40..+85°C screened, including PC Card antenna
------------------------------	------------------	---

Software: Windows®

This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.

For a comprehensive Windows® driver package supporting the XI-325H WLAN PC Card, please refer to www.zcomax.com (section PCMCIA / XI-325 Series).

For operating systems not mentioned here [contact MEN sales](#).

Documentation	Compare Chart 3U CompactPCI® / PlusIO CPU cards » Download Compare Chart 3U CompactPCI® / PlusIO peripheral cards » Download		
	<table> <tr> <td>20F209L00</td><td>F209L User Manual</td></tr> </table>	20F209L00	F209L User Manual
20F209L00	F209L User Manual		

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.