


M66 – 32 Binary Inputs/Outputs

- 32 inputs 0..32 V or
- 32 outputs 12..32 V or
- Mixed I/O in groups of 4
- 1.9 A output current per channel
- 16 A switching power on one M66
- Load on ground
- Optical isolation
- -40 to +85°C screened versions

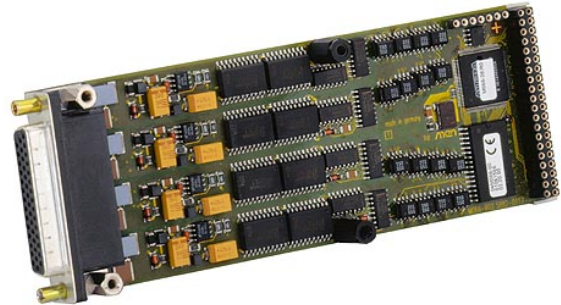


The mezzanine card M66 provides 32 binary process signals on one single M-Module™, which is the largest number of binary channels ever seen on a mezzanine board. This allows a total of 128 signals with four M-Modules™ on a double Eurocard (i.e. in one slot of a VME or CPCI system). With its extremely high output

current of 1.9 A per channel, optical isolation and its over-current and over-temperature protection mechanisms, the M66 is the M-Module™ of choice for advanced industrial and automotive applications.

The M66 is based on the M-Module™ ANSI mezzanine standard. It can be used as an I/O extension in any type of bus system, i.e. CPCI, VME or on any type of stand-alone SBC. Appropriate M-Module™ carrier cards in 3U, 6U and other formats are available from MEN or other manufacturers.

Diagram

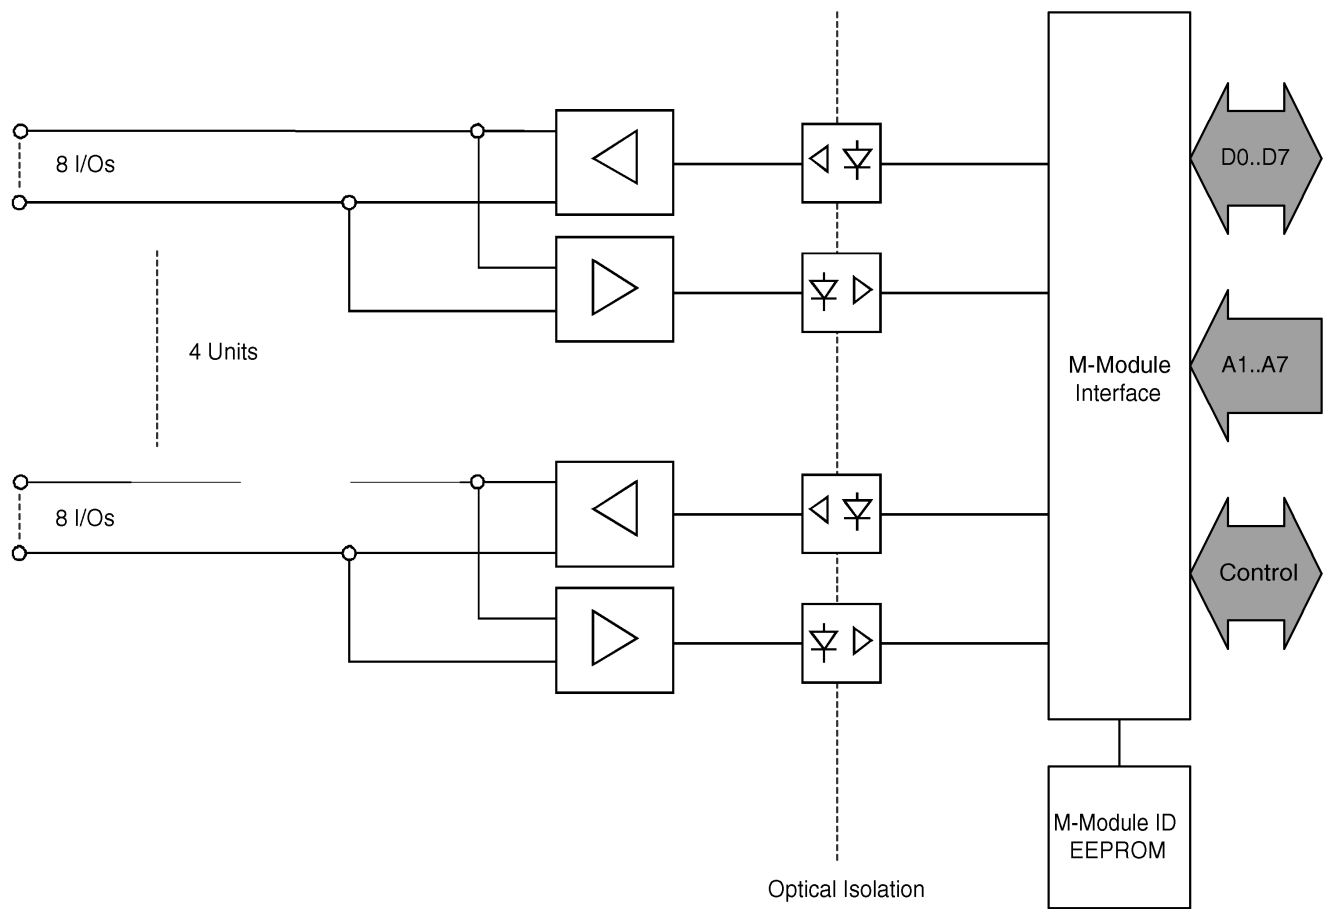

Technical Data

Binary I/Os	■ 32 binary signals □ 4 optically isolated units □ 8 channels for each unit ■ Individual use of each channel as input or output ■ Individual edge-triggered interrupts ■ Input/output load on ground ■ High-side output switches ■ High output current □ Max. 1.9A per channel □ Max. 4A per unit ■ Over-current and over-temperature protection
Output Characteristics	■ Output voltage range: 12V..32V ■ Output current log. 0: max. 10µA ■ Output current log. 1: max. 1.9A ■ Switching time for output change: 200µs typ. ■ Isolation voltage (optocoupler): 500V DC
Input Characteristics	■ Input voltage min.: 0V ■ Input voltage max. external supply voltage (12..32V) ■ Voltage level log. 0: 0V..6V or open ■ Voltage level log. 1: 12V..32V ■ Input current log. 1: 4.4mA @ 24V ■ Switching threshold: 9.2V @ 0.78mA typ. ■ Switching time for input change: 200µs typ. ■ Excess voltage protection: ± 50V
Peripheral Connections	■ Via front panel on a shielded 44-pin HD-Sub receptacle connector
M-Module™ Characteristics	■ A08, D08, INTA, IDENT
Electrical Specifications	■ Isolation voltage: □ 500V DC between isolated side and digital side □ 180V DC between the channels □ Voltage between the connector shield and isolated ground is limited to 180V using a varistor; AC coupling between connector shield and isolated ground through 47nF capacitor ■ Supply voltage/power consumption: □ +5V (4.85V..5.25V), 200mA typ. □ +24V (external supply voltage 12..32V), 46mA typ. ■ MTBF: 45,000h @ 50°C (derived from MIL-HDBK-217F)
Mechanical Specifications	■ Dimensions: conforming to M-Module™ Standard ■ Weight: 110g
Environmental Specifications	■ Temperature range (operation): □ 0..+60°C or -40..+85°C □ Airflow: min. 10m³/h ■ Temperature range (storage): -40..+85°C ■ Relative humidity range (operation): max. 95% without condensation ■ Relative humidity range (storage): max. 95% without condensation ■ Altitude: -300m to + 3,000m ■ Shock: 15g/11ms ■ Bump: 10g/16ms ■ Vibration (sinusoidal): 2g/10..150Hz ■ Conformal coating on request
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)

Technical Data

Software Support

- MEN Driver Interface System (MDIS™ for Windows®, Linux, VxWorks®, QNX®, OS-9®)
- [For more information on supported operating system versions and drivers see Downloads.](#)

Configuration & Options

Standard Configurations

Article No.	Channels	Operation Temperature
04M066-00	32 in/out	0..+60°C
04M066-02	32 in	0..+60°C
04M066-03	32 in/out	-40..+85°C

Options

Channels

- 32 in or 32 in/out

Operation Temperature

- 0..+60°C
- -40..+85°C

Ordering Information

Standard M66 Models	04M066-00	32 binary inputs and/or outputs, 0..+60°C
	04M066-02	32 binary inputs, 0..+60°C
	04M066-03	32 binary inputs and/or outputs, -40..+85°C screened
Miscellaneous Accessories	05M000-14	M-Module™ cable, 2.5m, with 44-pin HD-Sub plug/housing to pig tail
	05M000-17	25 mounting screw sets to fix M-Modules™ on carrier boards
	05M000-25	M-Module™ cable, 2m, with 44-pin half-pitch D-Sub plug/housing to 50-pin D-Sub receptacle/housing, (connecting 1:1)
	05M066-01	M66 cable, 44-pin HD D-Sub plug to 44-pin HD D-Sub receptacle assembled on PCI-card front panel, 1:1
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	13M066-06	MDIS5™ low-level driver sources (MEN) for M66, A302 and D302
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	13M066-70	MDIS4™/2004 / MDIS5™ Windows® driver (MEN) for M66, A302 and D302
Software: VxWorks®	This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M066-06	MDIS5™ low-level driver sources (MEN) for M66, A302 and D302
Software: QNX®	This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M066-06	MDIS5™ low-level driver sources (MEN) for M66, A302 and D302
Software: OS-9®	This product is designed to work under OS-9®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13M066-06	MDIS5™ low-level driver sources (MEN) for M66, A302 and D302
For operating systems not mentioned here contact MEN sales .		
Documentation	Compare Chart binary I/O M-Modules™ » Download	
	20M000-00	M-Module™ Draft Specification, Rev. 3.0
	20M066-00	M66 User Manual

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.