

P599 – FPGA-based USM™ Main PMC


- **Main PMC for USM™ Universal Submodules**
- **1 USM™ slot**
- **1 FPGA 33,216 LE (for user-defined I/O and Nios® soft core)**
- **32 MB DDR2 SDRAM**
- **2 MB Flash**
- **-40 to +85°C with qualified components**



USM™ Universal Submodules make PMC modules more flexible than ever. The main PMC P599 gets its specific function through the IP cores implemented inside its onboard FPGA. This function can be changed at any time through implementation of different IP cores. The corresponding line drivers are realized on the USM™ which is simply plugged on the P599. The same USM™ may also be used on XMCs, conduction-cooled PMCs or M-Module™ main modules. A new design is then limited to the USM™ module and the FPGA content and therefore saves development time and costs. A Nios® soft processor implemented in the Cyclone® II FPGA by Altera® provides local intelligence where needed. The I/O signals are led to the USM™ and then to a SCSI connector at the front of the P599.

The growing range of Wishbone-based standard IP cores from MEN comprise different UARTs, Ethernet, fieldbus interfaces, graphics, digital I/O etc. For users who like to write and/or implement specific IP cores on their own a complete FPGA USM™ development kit is available. The USM™ concept has been developed for harsh environments. Therefore, the P599 uses robust connectors to the USM™, while all other components are soldered, and operates in a -40 to +85 °C temperature range with qualified components. The P599 is a PMC mezzanine card suitable for any PMC compliant host carrier board in any type of bus system, i.e. CPCI, VME or on any type of stand-alone SBC. Appropriate PMC carrier cards in 3U, 6U and other formats are available from MEN or other manufacturers.

Diagram

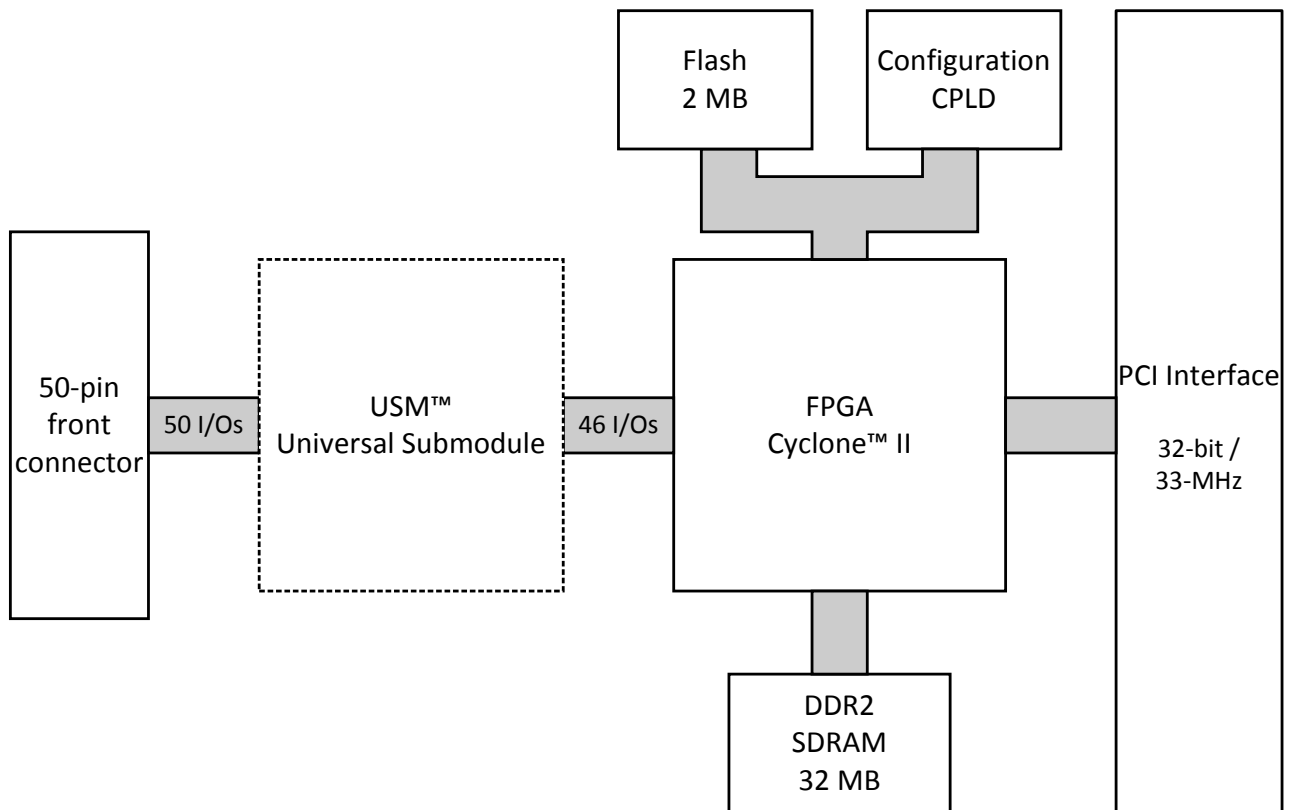

Technical Data

Functionality	■ User-defined through FPGA ■ Line drivers and/or additional hardware implemented on USM™ Universal Submodule (not included)
Memory	■ 32MB SDRAM memory □ Soldered □ DDR2 □ 132MHz memory bus frequency □ FPGA-controlled ■ 2MB non-volatile Flash □ For FPGA data and Nios® firmware □ FPGA-controlled
FPGA	■ Standard factory FPGA configuration: □ Main bus interface □ Altera® SOPC Unit incl. Nios® II/f soft processor, GPIO, UART and DDR2 SDRAM control □ Wishbone-to-Avalon®/Avalon®-to-Wishbone bridges □ Chameleon Table V2 □ Interrupt controller, SMBus controller □ PCI to Wishbone bridge, ID EEPROM emulation □ 16Z045_FLASH - Flash interface □ 16Z034_GPIO - GPIO controllers (2 IP cores, for onboard LEDs and 8-bit I/O) ■ The FPGA offers the possibility to add customized I/O functionality. See FPGA.
USM™ Slot	■ One slot for a standard USM™ module ■ For implementation of line drivers and/or additional hardware
Miscellaneous	■ Eight front-panel LEDs, FPGA-controlled ■ I²C interface to detect the USM™ module
PMC Characteristics (PCI)	■ Compliant with PCI Specification 2.2 ■ 32-bit/33-MHz, 3.3V V(I/O) ■ Target
Peripheral Connections	■ Via front panel on a shielded 50-pin HP D-Sub SCSI 2 receptacle connector
Electrical Specifications	■ Isolation voltage: □ Voltage depends on implementation and signal routing of USM™ ■ Supply voltage/power consumption: □ +5V (-3%/+5%), FPGA idle / US0 plugged: 83mA, memory test / US0 plugged: 109mA □ +3.3V (-5%/+5%), FPGA idle / US0 plugged: 74mA, memory test / US0 plugged: 82mA ■ MTBF: 669,963h @ 40°C according to IEC/TR 62380 (RDF 2000)
Mechanical Specifications	■ Dimensions: conforming to IEEE 1386.1 ■ Weight: 65g (w/o USM™ module)
Environmental Specifications	■ Temperature range (operation): □ -40..+85°C (qualified components) □ Airflow: min. 10m³/h ■ Temperature range (storage): -40..+85°C ■ Relative humidity (operation): max. 95% non-condensing ■ Relative humidity (storage): max. 95% non-condensing ■ Altitude: -300m to + 3,000m ■ Shock: 15g/11ms ■ Bump: 10g/16ms ■ Vibration (sinusoidal): 2g/10..150Hz ■ Conformal coating on request
Safety	■ PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers
EMC	■ Tested according to EN 55022 (radio disturbance), IEC1000-4-2 (ESD) and IEC1000-4-4 (burst)

Technical Data

Software Support

- Nios® sample design for Quartus® II development tools
- Flash update tools for Linux, Windows®, VxWorks®, QNX®
- Driver software depending on implemented FPGA functions
- [For more information on supported operating system versions and drivers see Downloads.](#)

FPGA

This product offers the possibility to add customized I/O functionality in FPGA.

Flexible Configuration

- Customized I/O functions can be added to the FPGA.
- It depends on the board type, pin counts and number of logic elements which IP cores make sense and/or can be implemented. Please contact MEN for information on feasibility.
- [You can find more information on our web page "User I/O in FPGA"](#)

FPGA Capabilities

- FPGA Altera® Cyclone® II EP2C35
 - 33,216 logic elements
 - 483,840 total RAM bits
 - Supports Nios® II soft processor
- Connection
 - Functions can be linked to Wishbone or Avalon® bus
 - Available pin count: 46 pins (FPGA to USM™)
 - Functions available via USM™ at front I/O connector
- [MEN offers an FPGA Development Package as well as Flash update tools for different operating systems.](#)

MEN IP Cores

- MEN offers a large number of standard IP cores.
- Examples:
 - IDE (e.g. PIO mode 0, UDMA mode 5)
 - UARTs
 - CAN bus
 - Display control
 - Fast Ethernet (10/100Base-T)
 - ...
- For IP cores developed by MEN please refer to our IP core overview.
 - [IP Core compare chart \(PDF\)](#)
- MEN also offers development of new (customized) IP cores.

Third-Party IP Cores

- Third-party IP cores can also be used in combination with MEN IP cores.
- Examples:
 - www.altera.com
 - www.opencores.org

FPGA Design Environment

- Altera® offers free download of Quartus® II Web Edition
 - Complete environment for FPGA and CPLD design
 - Includes schematic- and text-based design entry
 - Integrated VHDL and Verilog HDL synthesis and support for third-party synthesis software
 - SOPC Builder system generation software
 - Place-and-route, verification, and programming
- [Altera® Quartus® II Web Edition FPGA design tool](#)

Ordering Information

Standard P599 Models	15P599-00	USM™ main PMC, -40..85°C with qualified components
Miscellaneous Accessories	05P000-01	25 mounting screw sets to fix PMC/XMC modules on carrier boards
	05P599-00	PMC/M-Module™ cable, 2m, with 50-pin HP D-Sub 50 M both sides, 0..+60°C
	08U500-00	Universal Submodule for prototyping, -40..+85°C qualified
Software: FPGA	16P599-00	Nios® PMC USM™ FPGA Development Package (MEN) (without Altera® Quartus® II) (license included in PMC USM™ FPGA Development Kit)
Software: Linux	This product is designed to work under Linux. See below for potentially available separate software packages from MEN.	
	13Z017-06	MDIS5™ low-level driver sources (MEN) for 16Z034_GPIO and 16Z037_GPIO
	13Z100-91	Linux FPGA update tool (MEN)
Software: Windows®	This product is designed to work under Windows®. See below for potentially available separate software packages from MEN.	
	13P599-77	Windows® Installset (MEN) for P599, P598 and PMC USM™ FPGA development kit (Includes all free drivers developed by MEN for the supported hardware.)
	13Z100-70	Windows® FPGA update tool (MEN)
Software: VxWorks®	This product is designed to work under VxWorks®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13Z017-06	MDIS5™ low-level driver sources (MEN) for 16Z034_GPIO and 16Z037_GPIO
	13Z100-60	VxWorks® FPGA update tool (MEN)
Software: QNX®	This product is designed to work under QNX®. For details regarding supported/unsupported board functions please refer to the corresponding software data sheets.	
	13Z017-06	MDIS5™ low-level driver sources (MEN) for 16Z034_GPIO and 16Z037_GPIO
	13Z100-40	QNX® FPGA update tool (MEN)
For operating systems not mentioned here contact MEN sales .		
Documentation	Compare Chart mezzanine functions on PMC/XMC and PC-MIP® » Download	
	20P599-00	P599 User Manual
	20U500-00	USM™ Specification
	21M199-00	P599/M199 Programmer's Guide

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SA
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro, Inc.
24 North Main Street
Ambler, PA 19002
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2013 MEN Mikro Elektronik GmbH. All rights reserved.