




Model number

BT115A
Activator for F31 series

Features

- Four fixed actuating lugs, offset by 90°
- For right and left rotating drives with 180° rotational motion

Dimensions

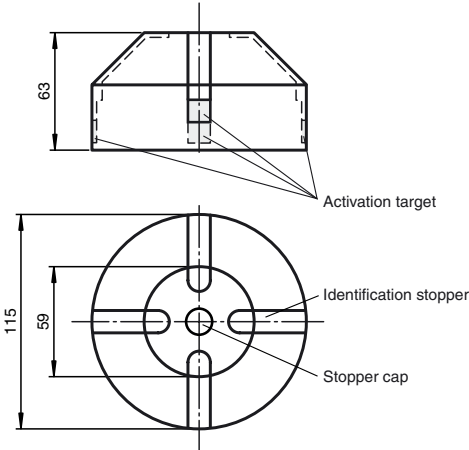

Technical data

General specifications

Ring diameter	≤ 110 mm
Spring ring height	≤ 7 mm

Mechanical specifications

Shaft diameter	< 90 mm
Shaft height	30 mm and 50 mm
Fixing hole pattern	30 x 130 mm

Material

Housing	PA
Spacer disk	PA (2 units, 10 mm strong)
Stopper cap	PBT (1 unit black)
Identification stopper	PA (2 units yellow, 2 units black)
Fixing screw	for activator: V2A (1 unit M6 x 25) for sensors - F31: V2A (4 items M5 x 16, 2 items M5 x 12)
Activation target	V2A (integrated)

Notes

The activator consists of a conductive plastic material which prevents static charging and allows installation in potentially explosive environments.