


3U CompactPCI Graphics Module

Extended
Temperature
+85°C
-40°C

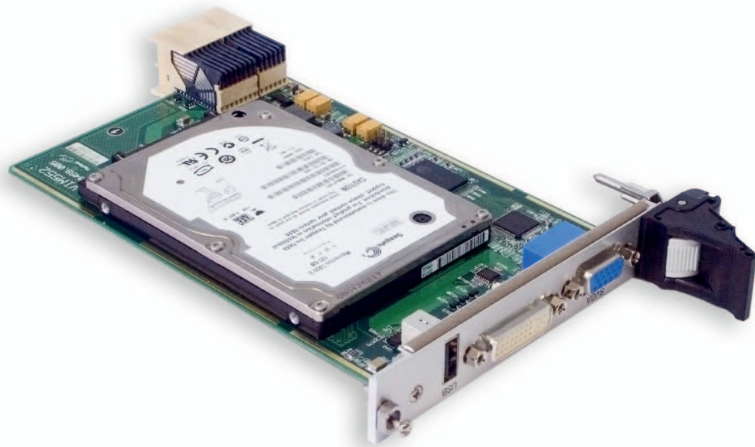


- Compliance with PICMG standard
- Silicon Motion SM750 Controller
- Multi-display VGA, DVI-I
- Extended operating temp. -40~+85°C

Specification	
Controller	Silicon Motion SM750
Memory	64MB SDRAM soldered onboard
Storage	1 x 2.5" SATA HDD/SSD (Consumption under 5Watt)
Front I/O	
VGA	1 x VGA, resolution up to 1920x1440@60Hz
DVI-I	1 x DVI-I resolution up to 1920x1200@60Hz
USB	1 x USB2.0

Mechanical and Environment	
Form Factor	3U CompactPCI
Operating Temp.	-40 to 85°C
Storage Temp.	-40 to 85°C
Power Input	12V DC
MTBF	340,000 hours

Block Diagram

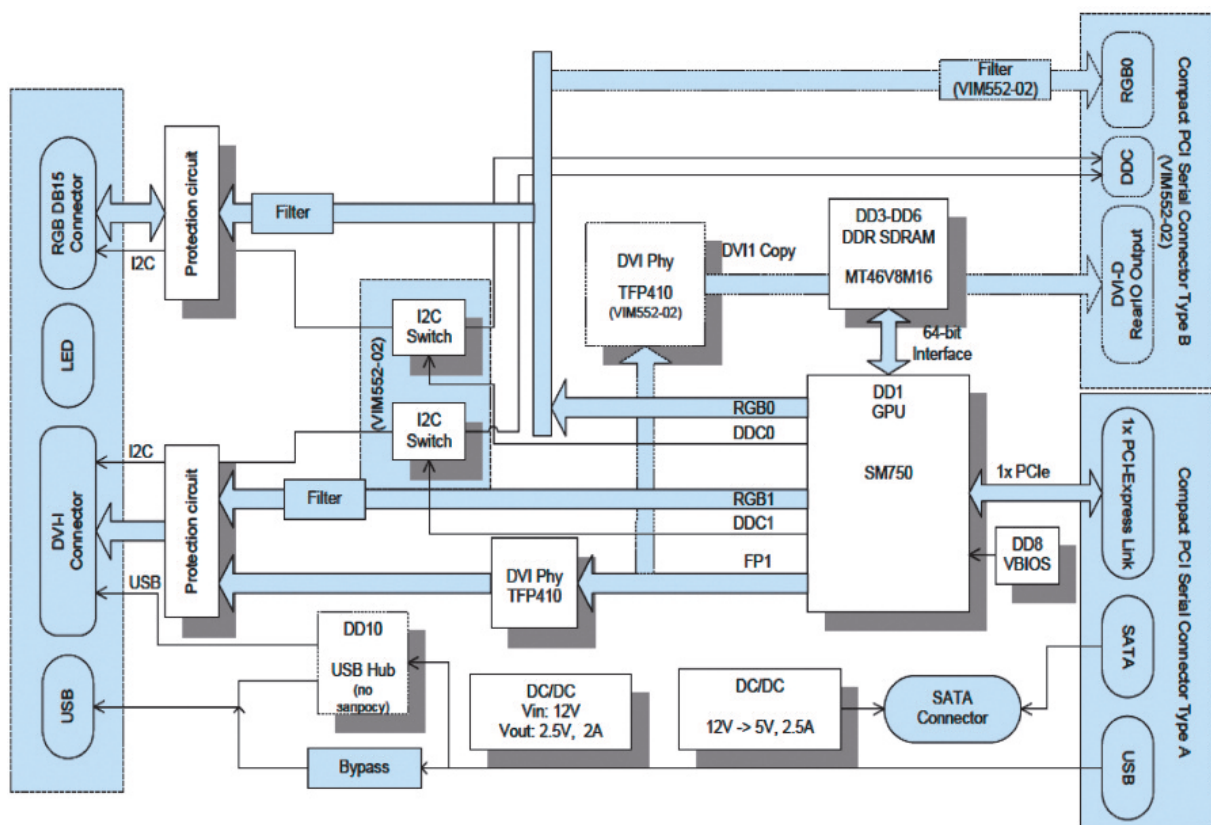

Ordering information

MT405

3U CompactPCI Graphics Module

1 x VGA, 1 x DVI-I, 1 x 2.5" SATA HDD/SSD

Operating Temperature -40 to 85°C

Note: Specifications are subject to change without prior notice