


3U CompactPCI Storage Expansion Module

Extended
Temperature
+85°C
-40°C

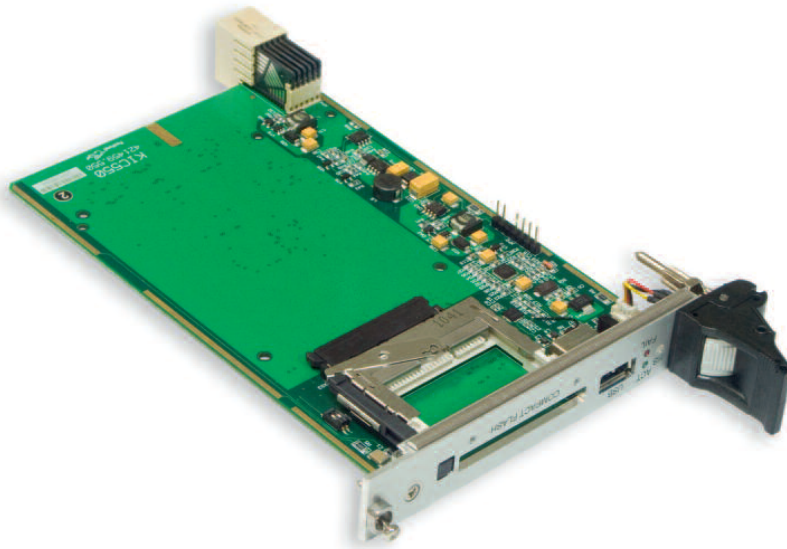


- Compliance with PICMG 2.30 standard
- 1 x 2.5" SSD/HDD, 1 x CFast
- Multi display: 2 x DisplayPort
- Support RAID 0, 1 & Hot Swap
- Extended operating temp. -40~+85°C

Storage Device	
2.5" HDD/SSD	1 x 2.5" SSD/HDD
CFast	1 x CFast
Front I/O	
USB	1 x USB3.0 (Type A)
LED Indicator	1 x SGPIO LED, status of RAID finction 1 x Hot Swap LED

Mechanical and Environment	
Form Factor	3U CompactPCI
Operating Temp.	-40 to 85°C
Storage Temp.	-40 to 85°C
Relative Humidity	10% to 93%, non-condensing
Power Input	12V DC, 0.27A
MTBF	1,000,000 hours

Block Diagram

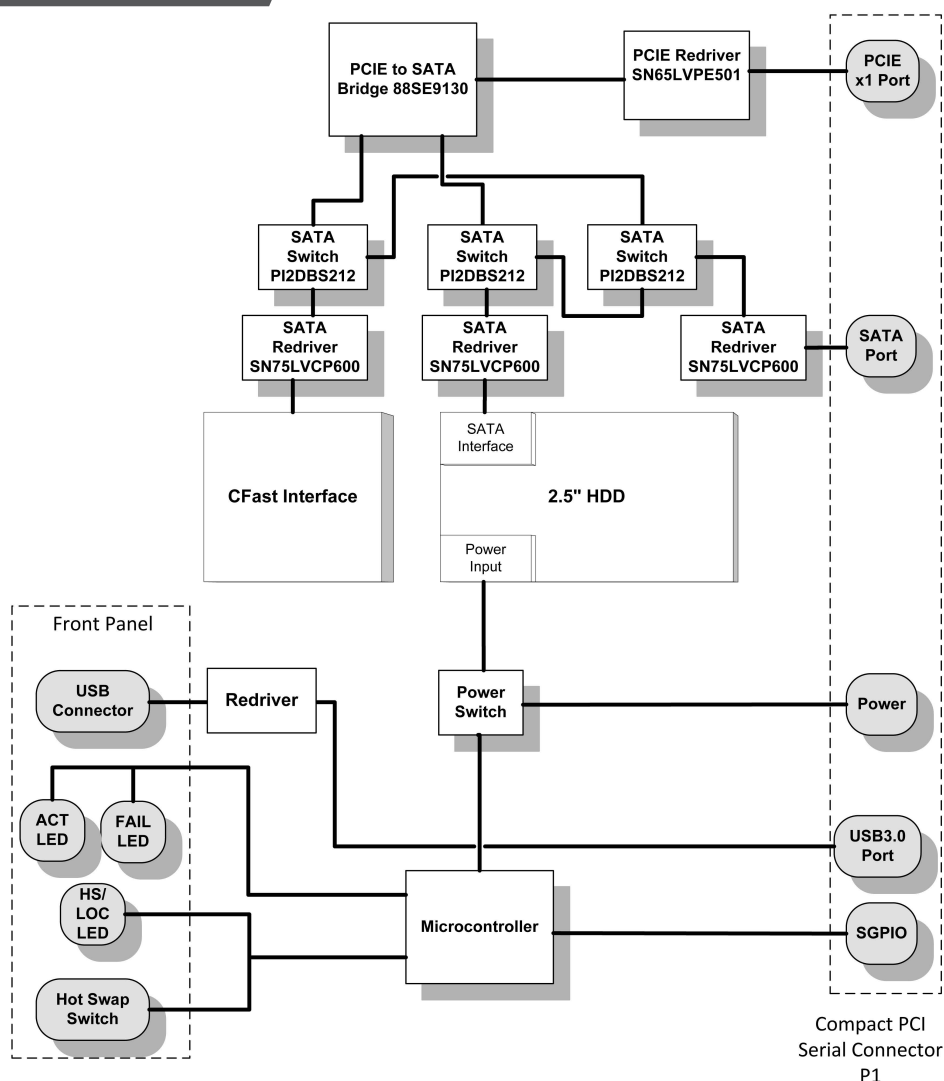

Ordering information

MT401

3U CompactPCI Storage Carrier Module

1 x 2.5" SATA SSD/HDD, 1 x CFast, support RAID and hot swap function

Operating Temperature -40 to 85°C

Note: Specifications are subject to change without prior notice