


3U CompactPCI Serial PCI Express Switchboard

Extended
Temperature
+85°C
-40°C

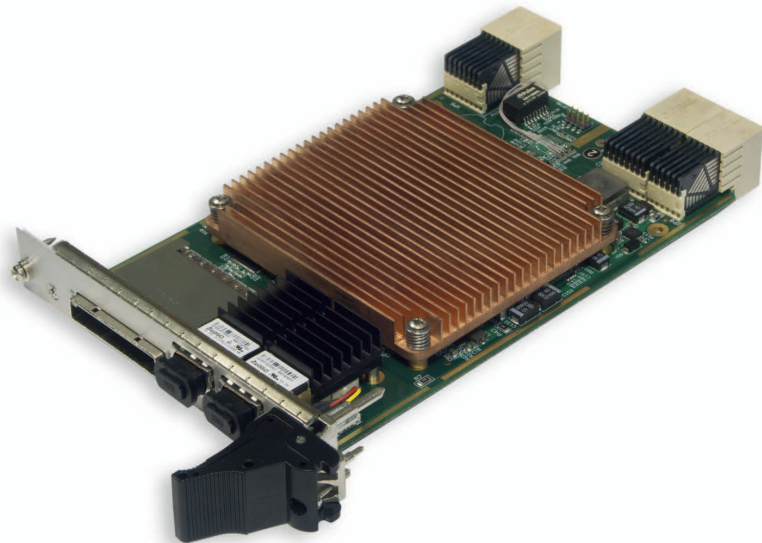


- Compliance with PICMG/VITA standard
- CompactPCI Serial
- PCI Express External Cabling
- PCI Express Fiber Optics
- Extended operating temp. -40~+85°C

Front I/O	
PCIe External Cabling	1 x PCIe External Cabling # PCIe x8 Gen1/Gen2
PCIe Fiber Optics	1 x PCIe Fiber Optics # PCIe x8 Gen1/Gen2
LED Indicator	1 x System LED, 1 x PCIe External Speed LED 1 x Fiber Optics Speed LED

Mechanical and Environment	
Form Factor	3U CompactPCI
Operating Temp.	-40 to 85°C
Storage Temp.	-40 to 85°C
Relative Humidity	up to 98%, non-condensing (with operational coating)
Power Input	12V DC, under 4A
MTBF	100,000 hours

Block Diagram

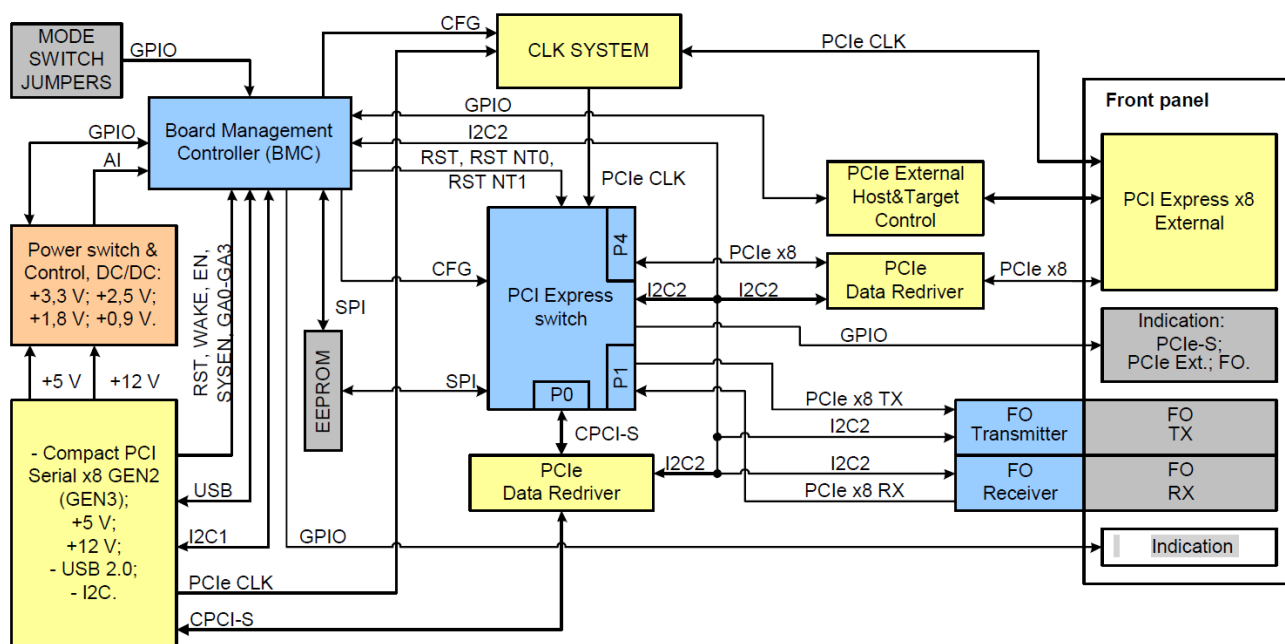

Ordering information

MT403

3U CompactPCI Serial PCI Express Switchboard

1 x PCIe External Cabling, 2 x PCIe Fiber Optics

Operating Temperature -40 to 85°C

Note: Specifications are subject to change without prior notice