


3U CompactPCI Audio and Video Input Module

Extended
Temperature
+85°C
-40°C

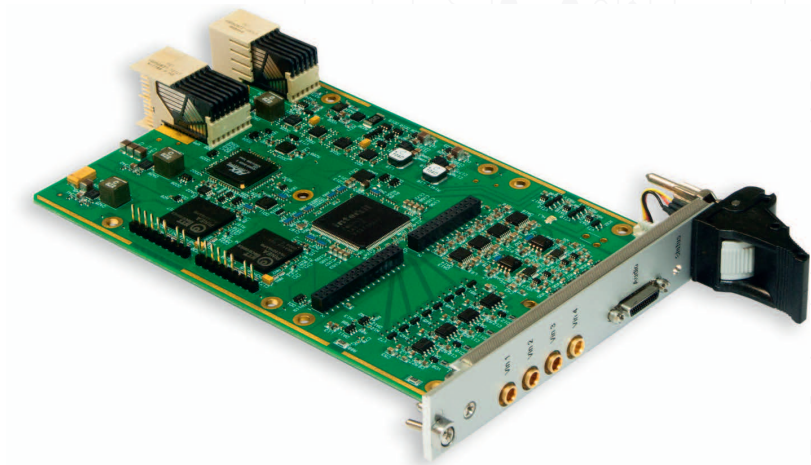

- Compliance with PICMG standard
- Intersil™ TW6869 Video decoder
- 4 x Audio, 4 x Video Input
- Extended operating temp. -40~+85°C


Specification	
Decoder	IntersilTM TW6869
OS support	Microsoft: indows 7 Linux: Kernel 3.2.0
Front I/O	
Video Input	4 x Video input jack, (MCX 75 Ohm End Launch Jack)
Audio Input	1 x Audio input connector, (HDR-EA26LFYPG1-SLG+)
LED Indicator	1 x Status LED

Mechanical and Environment	
Form Factor	3U CompactPCI
Operating Temp.	-40 to 85°C
Storage Temp.	-40 to 85°C
Humidity	Up to 93% (with coating)
MTBF	100,000 hours

Block Diagram

Backplane

Front Panel

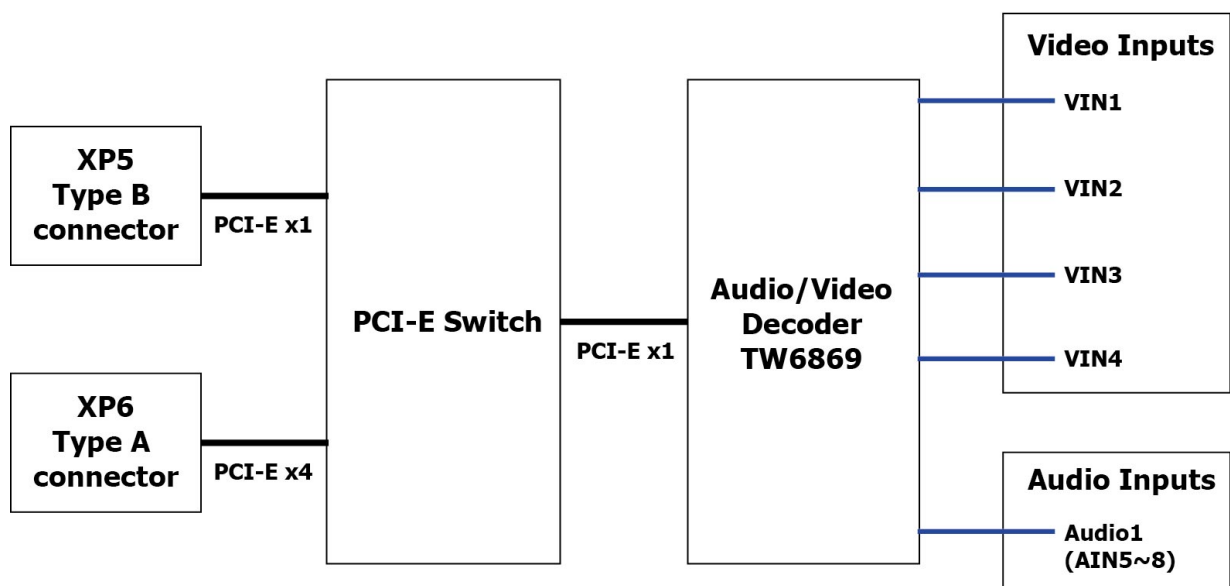

Ordering information

MT407

3U CompactPCI Audio and Video Input Module

4 x Audio (mono), 4 x Video channel

Operating Temperature -40 to 85°C

Note: Specifications are subject to change without prior notice