

Medical Grade Thin All-In-One

MeD215

True-Flat Touch Panel All-In-One Computer with 21.5" Full HD LCD and Intel® Core™ i7/i5/i3 Processor





- Medical all-in-one Panel Computer
- 21.5" Full HD (1920x1080) Display
- True Flat Multi-Touch P-Cap Touchscreen
- Intel® Core™ i7/i5/i3 Platform Support
- Ultra slim and super lightweight design
- UL/CE/FCC Compliance
- Certified with Height Adjustable Articulating Arm
- Wall Mount, VESA Mount Support

Specification


System	
High Performance Processor	Intel® Core™ i3-4330TE Processor (4M Cache, 2.40 GHz)
	Intel® Core™ i5-4570TE Processor (4M Cache, up to 3.30 GHz)
	Intel® Core™ i7-4770TE Processor (8M Cache, up to 3.30 GHz)
Memory	1 x DDR3 SO-DIMM up to 8GB
Display / Touch	
LCD Size	21.5" (16:9 ratio)
Brightness	250 cd/m2
Resolution	1920 x 1080
Viewing Angle (H/V)	85/80
Touch Panel	True-Flat Projected Capacitive Touch
Ethernet	
Ethernet	2 x Realtek RL8111GN Gigabit Ethernet
I/O Interface	
Display	1 x VGA connector
Ethernet	2 x RJ45 Gigabit Ethernet LAN
Serial Port	4 x RJ48 (with DB9 convert cable) (RS-232)
Audio	1 x Line-out, 1 x MIC-in
USB Port	2 x USB3.0 standard-A connectors 4 x USB2.0 standard-A connectors
Power In	1 x 4-pole DIN (with latch)
Physical	
Dimension (W x D x H)	536 x 48 x 328 mm (21.1" x 1.9" x 12.9")
Weight	8 kg (17.6 lbs)
Chassis	Aluminum Alloy, Corrosion Resistant
Finish	Anodic aluminum oxide
Cooling	Cooling FAN
Ingress Protection	Front Bezel Water Proof (IP65)

Applications, Operating System	
Applications	Hospitality, Medical Healthcare, Digital Signage, Interactive Information, Kiosk, Embedded Computing and applications where Harsh Temperature, Shock, Vibration, Altitude, Dust, Damp and EMI Conditions.
Operating System	Microsoft Windows 7 32/64Bit, Microsoft Windows 8 32/64Bit, Microsoft Windows 10 32/64Bit, Ubuntu13.04 Ubuntu13.10 Ubuntu14.04, Fedora 20
Storage	
HDD	1 x 2.5" HDD/SSD – SATAIII speed up to 6.0Gb/s,
Peripheral (Option)	
WiFi + BT	802.11 b/g/n WLAN card + BT 4.0
Built-in Webcam	2MP
Mechanical and Environment	
Mounting	VESA 75mm
Reliability	Manufactured using ISO 9001/14001/13485/27001 Quality Control Program
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Humidity	20% ~ 85% RH non-condensing
EMC	CE and FCC compliance
Green Product	RoHS, WEEE compliance
Power Type	DC 19V/120W

Dimension

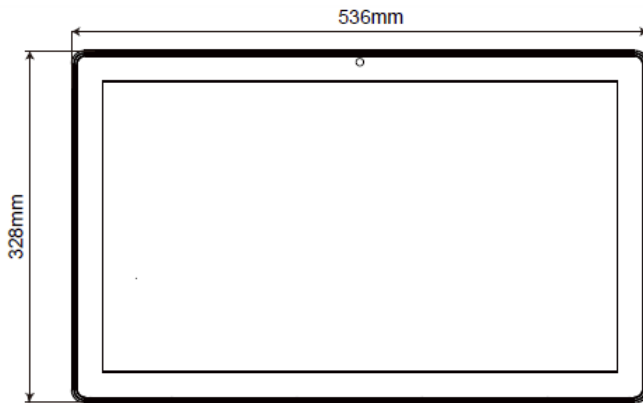


Side USB

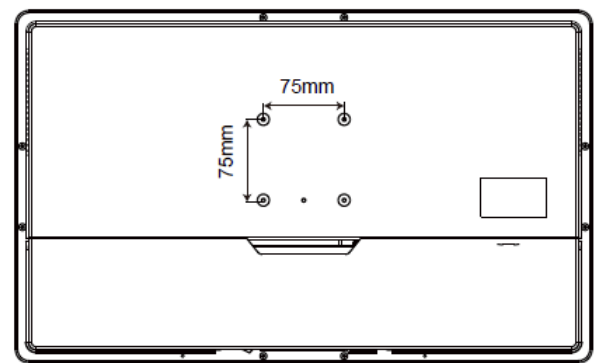

ARM08

Specification

Weight Capacity	3~8 kg (6.6~17.6 lbs)
Material	Aluminum Alloy
Tilt	30° up and 25° down (display)
Rotation	90° for portrait or landscape viewing (right & left)
Mounting Option	Wall Mount Type
Pivot	180° 360° 360°(wall" arm" display)
Extension	600mm
Lift	200~500mm
VESA	75mm/100mm

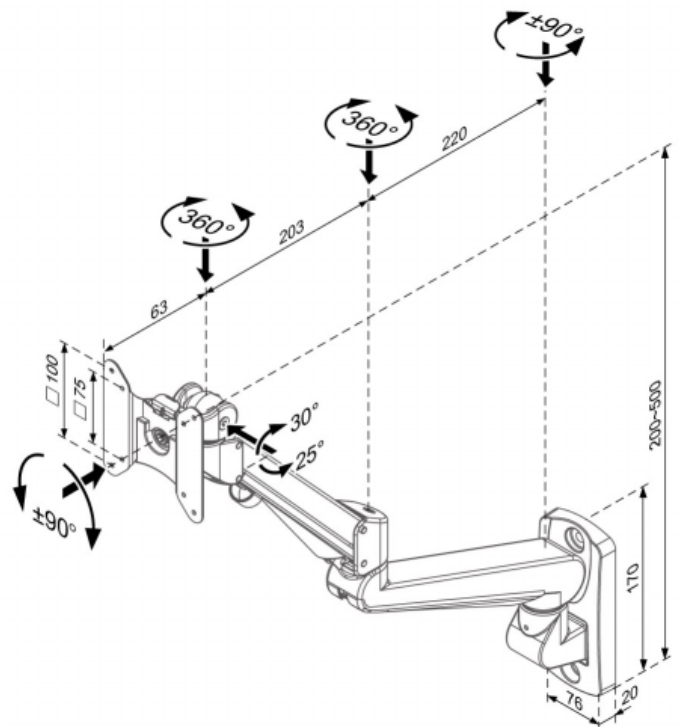

Ordering information

MeD215

MeD215A-1 : Medical AIO 21.5" w/Haswell i7-4770TE / 8GB RAM / 2.5 SATA HDD 500G/PCAP touch

MeD215A-2 : Medical AIO 21.5" w/Haswell i5-4570TE / 8GB RAM / 2.5 SATA HDD 500G/PCAP touch

MeD215A-3 : Medical AIO 21.5" w/Haswell i3-4330TE / 8GB RAM / 2.5 SATA HDD 500G/PCAP touch

ARM08

Gas Spring Wall Mount kit