



SPECIFICATION

OLED SPECIFICATION

Model No:

REA012864M

General Specification

The Features is described as follow:

- Dot Matrix: 128 x 64 Dots
- Module dimension: 27.3 × 27.3 × 2.72 (mm)
- Active Area: 21.744 × 11.204 (mm)
- Pixel Size: 0.148 × 0.148 (mm)
- Pixel Pitch: 0.17 × 0.17 (mm)
- Display Mode: Passive Matrix
- Display Color: Dual Color (Yellow / Sky Blue)
- Drive Duty: 1/64 Duty
- IC: SSD1306
- Interface: I2C
- SIZE: 0.96 inch

Interface Pin Function


No.	Symbol	Function
1	VCC	Power supply input: 2.8 – 5.2V
2	GND	Ground
3	SCL	The serial clock input
4	SDA	The serial data input



RAYSTAR

Contour Drawing & Block Diagram

PIN No.	SYMBOL
1	VCC
2	GND
3	SCL
4	SDA

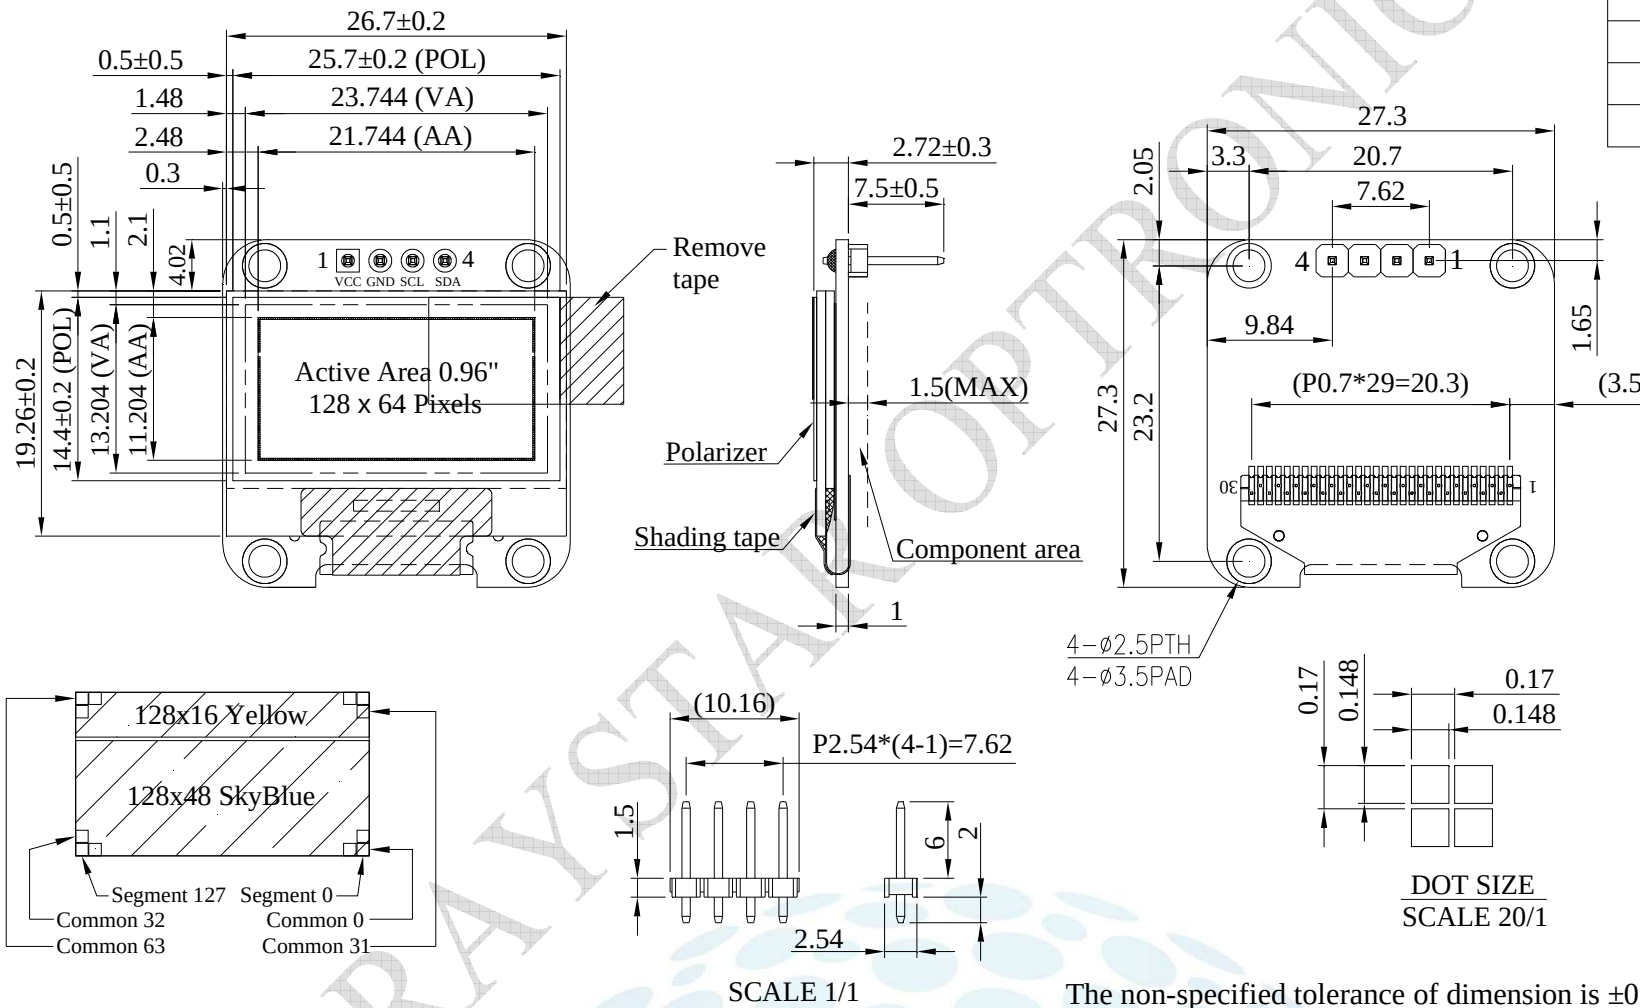

The non-specified tolerance of dimension is ±0.3 mm .

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage for Logic	VCC	2	5.5	V
Operating Temperature	TOP	-40	+80	°C
Storage Temperature	TSTG	-40	+85	°C

Electrical Characteristics

DC Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage for Logic	VCC	—	2.8	3.3	5.2	V
Input High Volt.	VIH	—	0.8×VCC	—	VCC	V
Input Low Volt.	VIL	—	0	—	0.2×VCC	V
Output High Volt.	VOH	—	0.9×VCC	—	VCC	V
Output Low Volt.	VOL	—	0	—	0.1×VCC	V
50% Check Board operating Current	ICC	VCC=3.3V	—	14.0	22.0	mA