



Cots



Industrial



Test



LED



Broadcast



COMM

500 Watt AC-DC Power Module

Features	Benefits
• 2.4 x 4" Brick Foot-print with Metal Case	• Smaller Package Size
• Load Share (optional)	• Parallel Capable
• High Efficiency	• Less Heat in System
• PMBus™	• Control and Monitoring
• Suitable for Conduction Cooling	• No Forced Air Required



Specification		
Model	PHF500F-28-R	
AC Input Voltage (1)	VAC	85 to 265VAC, 47-63Hz
AC Input Current (typ) (4)	A	5 / 2.5A
Power Factor	-	0.95 minimum (Vin=230VAC, Io > 80%, Tc=25°C, meets EN61000-3-2)
Inrush Current (typ) (4)	A	9A / 18A (peak) (20A max)
Input Turn - on Voltage	VAC	83V
Input Turn - off Voltage	VAC	79V
Hold -up (Typ.) (1) (2)	ms	20ms
Output Voltage Setpoint	VDC	27.5 - 28.5VDC (Vin=230VAC, Io=0%)
Start-up Delay (from application of Vin) (5)	s	2.3 / 1.1 sec (Vin = 115 / 230VAC, On/Off = On, Io = Io max., Vo = 0 to 0.1*Vo nom, Tc = 25°C)
Start-up Delay (from On / Off) (5)	s	2.2 / 1.1 sec (Vin = 115 / 230VAC, Io = Io max, Vo = 0 to 0.1*Vo nom, Tc = 25°C)
Output Voltage Rise Time (typ)	ms	65ms
Line Regulation (typ)	mV	42mV (0.15%) (Io=50% of Io,max, Vin=Vin,min to Vin, max)
Load Regulation (typ)	mV	28 mV (0.1%) (Vin=115/230 Vac, Io=0 to Io,max, excluding Droop)
Output Ripple (Pk to Pk) (3)	mV	400mV Typ. (500mV max.)
Over Voltage Protection (max)	VDC	35.5V
Over Current Protection (Hiccup) (max) (6)	A	21.5A
Maximum Output Capacitance	uF	3,000uF
Power Good Signal	mA	Open collector 200mA max. (Active low)
Auxiliary Supply	-	10-14V; 200mA
Remote On-Off	VDC	Low = On, < 0.8VDC (3.3V max input)
Over Temperature Protection	°C	Input line voltage dependent (see derating curves)
Series Operation	-	Yes (maximum of two units)
Parallel Operation (optional)	-	Droop Share
Operating Baseplate Temperature	°C	-40°C to 100°C (with derating)
Storage Temperature	°C	-55°C to 125°C
Humidity (non condensing)	%	Operating: 20 - 95%RH, Non Operating: 10 - 95%RH
Cooling	-	Conduction
Withstand Voltage (1 min)	VAC	Input to Output 3,000VAC: Input to Case 2,500VAC: Output to Case 1,500VDC
Isolation Resistance	Ω	Output to Case: 100MΩ at 500Vdc, 25C ambient, 70%RH
Vibration (Non Operating)	-	MIL-STD-810G: 514.6 Cat 4, Cat 21; Sine Vibration 23.52 m/s² Constant (XYZ Axis)
Shock	-	MIL-STD-810G: 516.6 Procedure I (XYZ Axis)
Safety Certifications	-	UL/cUL60950-1, IEC/EN60950-1, CE Mark
Size (typ)	mm	101.6 x 61.0 x 13.3
Weight	g	225
Warranty	Yrs	3

Notes: External components are required. Consult Installation Manual for detailed specifications, test methods and application notes.

- Maximum Power will be de-rated at Vin < 100V with 6.7 W/V (400W@85Vin)
- Typical holdup time with 2 x 470uF bulk cap, 100% Load
- Vin=115/230Vac, Io=100%, Tc=25°C. Measured across one 0.1uF, four 10uF ceramic capacitors, and two 220uF electrolytic capacitors located 2 inches away. BW = 20MHz.
- Vin = 115/230Vac, Io = 100%, Tc = 25°C
- With 2 x 470uF bulk cap
- Vo=28V. When Vo is higher than 28V, OCP trip point will be lower to limit Po_max


Specifications

Model	Voltage (V)	Range (V)	Current (A)	Wattage (W)	(typ) (%) (4)
PFH500F-28-XXX-R	28	22.4 - 33.6	18	504	90 / 92


Model Selector

Model	Mounting Inserts	Overvoltage Protection	Overcurrent Protection	Overtemperature Protection	Pin Length	Droop Model Current Share
PFH500F-28-0D0-R	3.3mm Ø Non-threaded	Latching	Non-Latching	Non-Latching	0.24" (6.1mm)	Yes
PFH500F-28-1D0-R	3mm (M3) Threaded	Latching	Non-Latching	Non-Latching	0.24" (6.1mm)	Yes
PFH500F-28-000-R	3.3mm Ø Non-threaded	Latching	Non-Latching	Non-Latching	0.24" (6.1mm)	No
PFH500F-28-100-R	3mm (M3) Threaded	Latching	Non-Latching	Non-Latching	0.24" (6.1mm)	No

Outline Drawing PFH500F

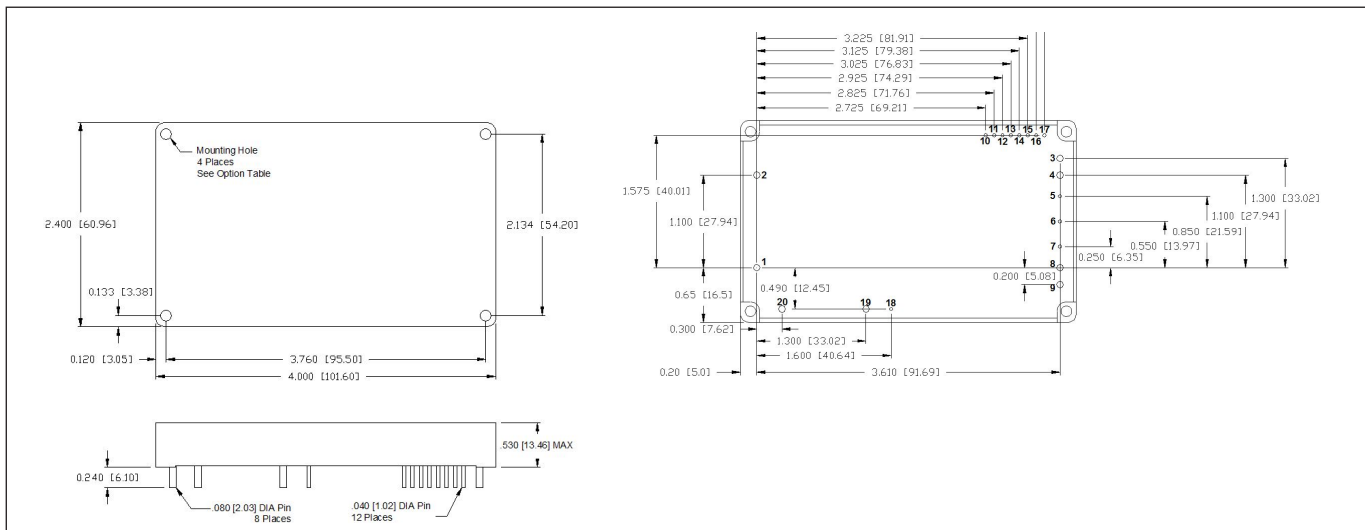

Basic Connection Diagram PFH500F

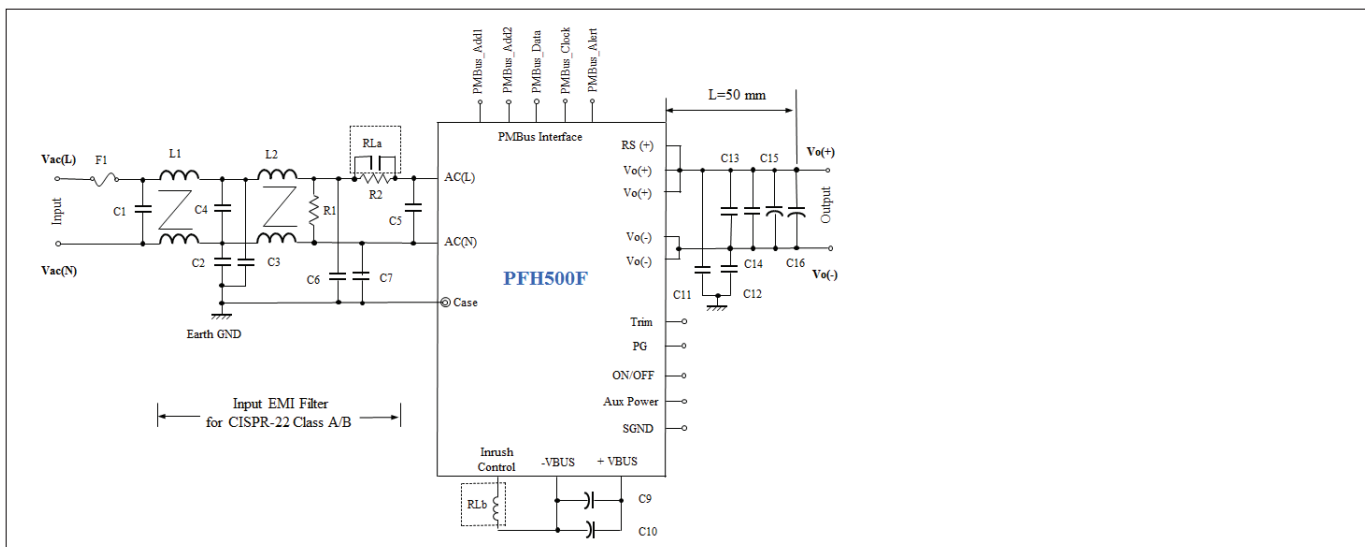

Pin Assignment

PIN	Function	PIN	Function
1	AC Input (Line) or AC (L)	11	Secondary Signal GND or SGND
2	AC Input (Neutral) or AC (N)	12	Aux Power Supply or Aux Power
3	Vout (-)	13	PMBus Clock
4	Vout (-)	14	PMBus Data
5	ON/OFF	15	PMBus Alert
6	Trim	16	PMBus Address 2
7	Remote Sense (+) or RS (+)	17	PMBus Address 1
8	Vout (+)	18	Inrush Control or Inrush CTL
9	Vout (+)	19	- Boost Voltage Bus or - VBUS
10	Power Good or PG	20	+ Boost Voltage Bus or + VBUS

Heat Accessory

Part #	Description
HS00110	2.4" x 4" x 1.5" Al with cylindrical pin fins & integrated thermal pad

Evaluation Board

Evaluation Kit Part #	Content
PFH05W-001-EVK-S0	Evaluation Kit Assembly with no module
PFH05W28-100-EVK-S1	Evaluation Kit Assembly with PFH500F-28-100-R module
PFH05W28-1D0-EVK-S1	Evaluation Kit Assembly with PFH500F-28-1D0-R module
PFH05W-S01-EVK-S0	Evaluation Kit Assembly with surge I/P filter, no module



TDK-Lambda France SAS

3 Avenue du Canada
Parc Technopolis
Bâtiment Sigma
91940 les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via Giacomo Matteotti 62
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com



Switzerland Sales Office

Eichtalstrasse 55
8634 Hombrechtikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
DK-6000 Kolding
Denmark
Tel: +45 8853 8086
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

1 Alexander Yanai
Segula
Petah-Tikva
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution