


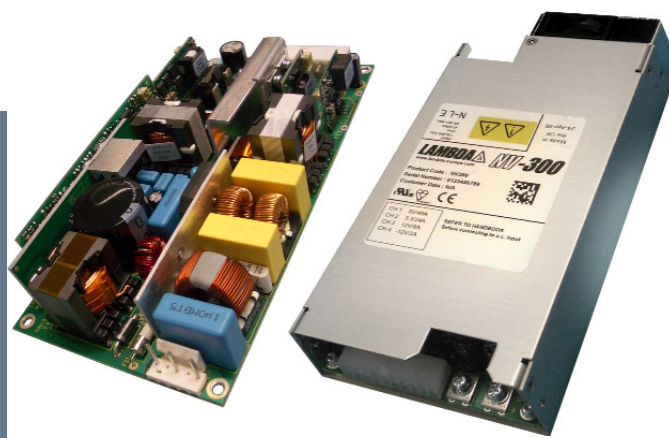

NV-Power

300 Watts, flexible power solution

- High Efficiency
- High Power Density (8.3W/in³)
- Up to 5 outputs
- No minimum load
- Fits 1U applications
- Medical Approval
- 3 Year Warranty
- Temperature controlled Fan Option

Key Market Segments & Applications

Instrumentation	Broadcast
Medical	ATE
Automation	Industrial Computing
Security	Lifesciences/Laboratory
Network Servers and Routers	

Features and Benefits

Feature	Benefit
◆ High Efficiency	◆ Minimises heat in system
◆ Low Profile	◆ Fits 1U applications
◆ High Power Density	◆ Less Space

INPUT

Input Voltage	90 - 264Vac / 120 - 350Vdc	Input Frequency	45 - 63Hz (440Hz with reduced PFC - consult factory)
Input Harmonics	EN61000-3-2 compliant	Inrush Current	<15A at 25°C and 264Vac, (cold start)
Input Fuse	Fast acting (not user accessible)	Power Factor	0.97 typical
Earth Leakage Current	300µA max at 264Vac & 63Hz (normal condition, 500µA Single Fault Condition)		

AVAILABLE OUTPUTS

Channel 1	Adjustment Range ₅	Channel 2	Adjustment Range ₅	Channel 3	Adjustment Range	Channel 4 ₂	Adjustment Range
5 5V / 40A ₁	5 - 5.5V	1 1.8V / 15A	0.9 - 3.8V	T 12V / 5A ₄	12 - 15V	3H -3.3V / 2A ₃	Fixed
		2 2.7V / 15A	2.5 - 3.8V	TH 12V / 8A ₆	12 - 15V	5H -5V / 2A ₃	Fixed
		3 3.3V / 15A	2.5 - 3.8V	F 15V / 4A ₄	12 - 15V	T -12V / 1A	Fixed
		2H 2.7V / 24A	2.5 - 3.8V	FH 15V / 6.4A ₆	12 - 15V	TH -12V / 2A ₃	Fixed
		3H 3.3V / 24A	2.5 - 3.8V	G 24V / 2.5A	18 - 24V	F -15V / 1A	Fixed
		0 Omit		0 Omit		FH -15V / 2A ₃	Fixed
						0H Fan supply only	
						0 Omit	

1. Maximum combined output current from Ch1 & Ch2 = 40A
2. Follow letters in red by 'P' for positive output channel 4.
3. 1.5A max if fitted with '-F' option.
4. 60W max output power
5. Max voltage at the output (includes remote sense)
6. 96W max output power

Other output options are available, please contact factory with your requirements.


ISOLATION

Input to Output	Reinforced	4.3kV (dc)	Note: Basic for IEC/EN/UL/CSA60601-1	
Input to Earth	Basic	2.25 kV (dc)	Output to Earth	200 V (dc)

OUTPUT SPECIFICATION

Remote Sense	Yes	Channels 1 & 2 - Max 0.5V total line drop.
Total Regulation	1.5%	For channels 1, 2 and 3 (2.5% for channel 4) Including Line (for 90-264Vac input change), Load (for 0-100% load change) and Cross (for 0-100% load change on any other output) regulation.
Ripple & Noise	1%	(or 50mV if higher) pk-pk, using EIAJ test method & 20MHz bandwidth
Voltage Accuracy	±1%	±5% for Channel 4
Turn on Time	1.5s max	at 90 Vac & 100% rated output power
Efficiency	up to 90%	configuration dependent
Hold up	16ms min	at 90 Vac
Min Load	None	on any output
Transient Response	<5%	of set voltage for 40% load change (in 50µs within the range 25 - 100% load)
Recovery	<500µs	for recovery to 1% of set voltage
Short circuit protection	Yes	
Over Temperature protection	Yes	
Over Voltage Protection	Yes	See Application Notes for details
Ch1 Good Signal	Yes	Provides a Logic 'Low' signal after Channel 1 output is within 90% (±5%) of nominal.

HOW TO CREATE A PRODUCT CODE

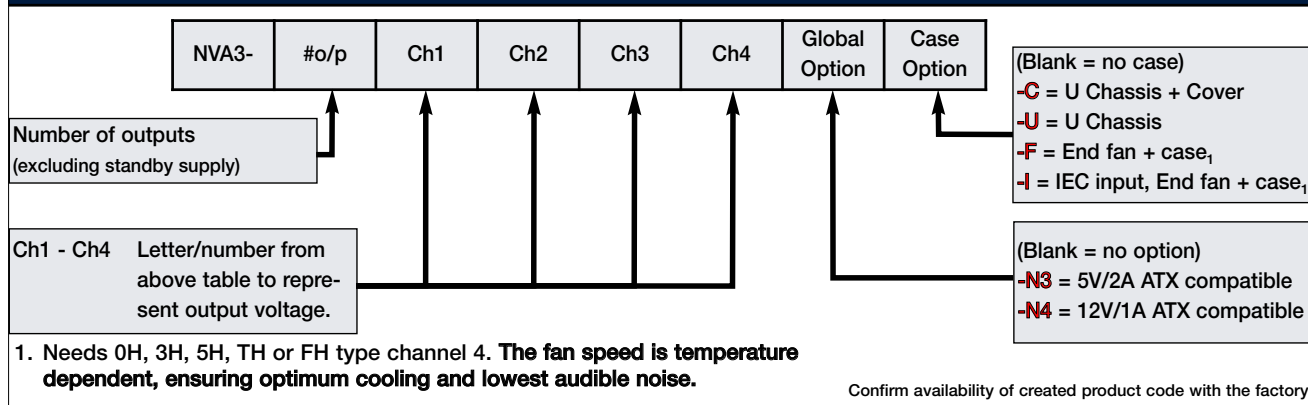

QUICK SELECTOR - preferred configurations

Model	CH1	CH2	CH3	CH4	CH5	Global Option ₁
NVA3-453TT	5V / 40A	3.3V / 15A	12V / 5A	-12V / 1A	-	No
NVA3-453TT-N3	5V / 40A	3.3V / 15A	12V / 5A	-12V / 1A	5V / 2A	ATX (-N3)
NVA3-350TT	5V / 40A	-	12V / 5A	-12V / 1A	-	No
NVA3-350TT-N3	5V / 40A	-	12V / 5A	-12V / 1A	5V / 2A	ATX (-N3)
NVA3-453FF	5V / 40A	3.3V / 15A	15V / 5A	-15V / 1A	-	No
NVA3-453FF-N3	5V / 40A	3.3V / 15A	15V / 5A	-15V / 1A	5V / 2A	ATX (-N3)
NVA3-350FF	5V / 40A	-	15V / 5A	-15V / 1A	-	No
NVA3-350FF-N3	5V / 40A	-	15V / 5A	-15V / 1A	5V / 2A	ATX (-N3)

Above Units available on rapid delivery.

See over for additional variants available 'Build to Order'

1. see page 3 for details of global option

GLOBAL SIGNALS (-N3 and -N4 Option Models)	
ATX Remote on/off	TTL logic level high or open circuit will inhibit all outputs (except Standby)
ATX Power Good	Logic high indicates ac supply is good and output 1 is within regulation.
Standby Supply	Common 0V with power supply. Not affected by ATX remote on/off -N3 Option = 5V / 2A -N4 Option = 12V / 1A.




IMMUNITY EN61000-6-2:2005, EN60601-1-2:2001			Criteria	
Electrostatic Discharge	EN61000-4-2	Level 3	Air discharge 8kV Contact discharge 4kV	A
Electromagnetic Field	EN61000-4-3	Level 3	(12V/m)	A
Fast / Burst Transient (ac input)	EN61000-4-4	Level 4	(tested to 4.4kV)	A
Fast / Burst Transient (dc output)	EN61000-4-4	Level 4	(tested to 2.2kV)	A
Surge Immunity	EN61000-4-5	Level 3	Common mode - 2.2kV Differential - 1.1kV	A
Conducted RF Immunity	EN61000-4-6	Level 3	(12V)	A
Power Frequency Magnetic Field	EN61000-4-8	Level 4	(30A/m)	A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3	Criteria B for 5 sec interruption	A
Voltage Fluctuations	EN61000-4-14	Class 3	For 100 - 240V Nominal	A

EMISSIONS EN61000-6-3:2001, EN60601-1-2:2001		
Radiated Electric Field	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B (2005) see app note for details
Conducted Emissions	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B (2005)
Conducted Harmonics	EN61000-3-2	Class A
Flicker	EN61000-3-3	Compliant - d _{max} only

ENVIRONMENT	
Temperature	0 to 50°C operational, -40°C to 85°C storage (max 12 months). Full load, with either '-F' option fitted or 2m/s air blown from input to output
Derating	50 to 70°C derate each output by 2.5% per °C
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 514.4, Pro I, Cat 1,9
Vibration	Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 516.5, Pro I, IV, VI
Altitude	3,000 metres operational
Pollution	Degree 2, Material group 3

SAFETY APPROVALS					
	Date	Amendments		Date	Amendments
EN 60950-1	2001		EN 61010-1	2001	
UL 60950-1	2003		IEC 61010-1*	2001	
CSA 22.2 No 60950-1	2003		IEC 60601-1	1988	
IEC 60950-1*	2001		EN 60601-1	1990	A1:1991, A2:1995
CE Mark	LV Directive 72/23/EEC(EN60950-1:2001)		UL 60601-1	2001	A1:1993, A2:1995, A13:1996
* CB certificate and Report available on request			Check with factory for status of approvals		

OUTLINE & CONNECTION DRAWINGS

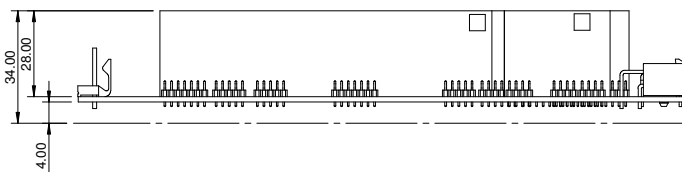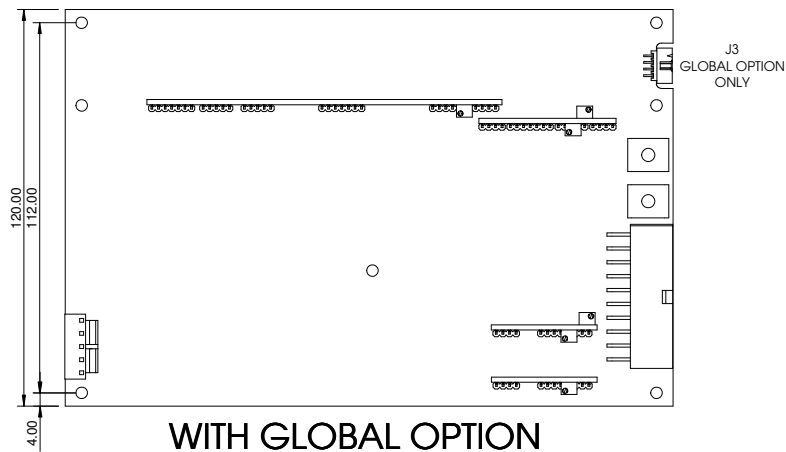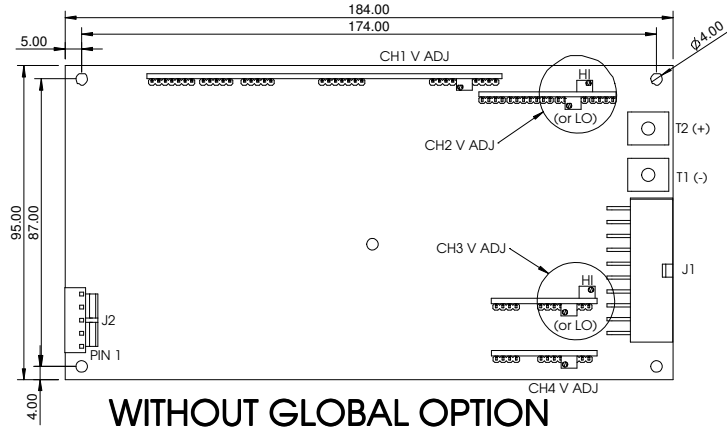

J2

PIN	CONNECTION
1	EARTH
2	NOT CONNECTED
3	LIVE
4	NOT CONNECTED
5	NEUTRAL

J1

PIN	CONNECTION	PIN	CONNECTION
11	0V COMMON	1	0V COMMON
12	0V COMMON	2	0V COMMON
13	CH2 +Ve	3	CH2 +Ve
14	CH2 +Ve	4	CH2 +Ve
15	+SENSE CH1	5	-SENSE CH1
16	+SENSE CH2	6	-SENSE CH2
17	CH1 GOOD	7	N/C
18	CH3 +Ve	8	CH3 +Ve
19	0V COMMON	9	0V COMMON
20	CH4 O/P	10	CH4 O/P


T1 & T2 (SEE TOP LEFT)

J3 (GLOBAL OPTION ONLY)

PIN	CONNECTION	PIN	CONNECTION
1	STANDBY -Ve	5	N/C
2	STANDBY +Ve	6	N/C
3	STANDBY -Ve	7	POWER GOOD
4	STANDBY +Ve	8	REM ON/OFF

MATING PARTS (MOLEX OR EQUIVALENT)


CONNECTOR	HOUSING	CRIMP PIN
J1	39-01-2245	44476-3112
J2	09-50-8051	08-52-0113
J3	51110-0860	50394
T1 & T2	N/A	TAG 19073-0165

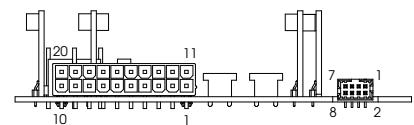


Notes 1. All customer fixings M3 2. Maximum Penetration 4.5mm 3. Maximum torque 0.9Nm 4. All tolerances +/-0.5mm

OUTLINE & CONNECTION DRAWINGS


OPEN FRAME

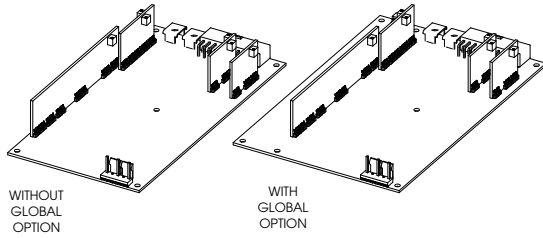


'U' CHANNEL
(COVER OPTIONAL)

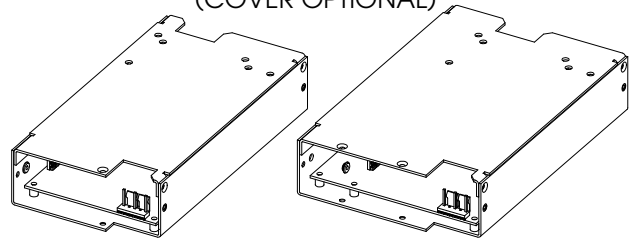



FAN OPTION

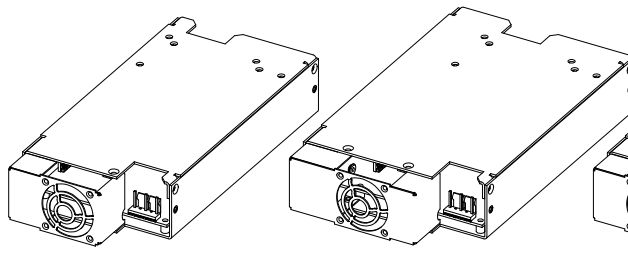



FAN+IEC OPTION

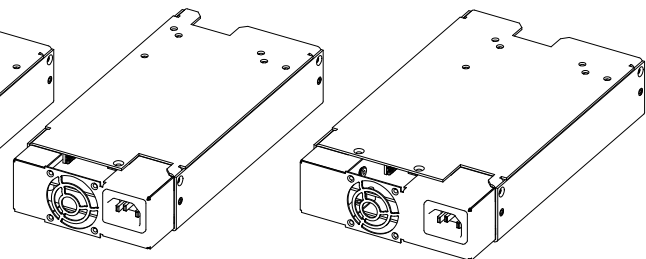



FAN+IEC OPTION



FAN OPTION



'U' CHANNEL

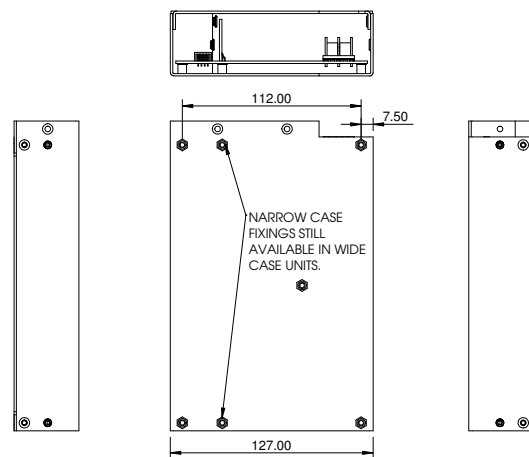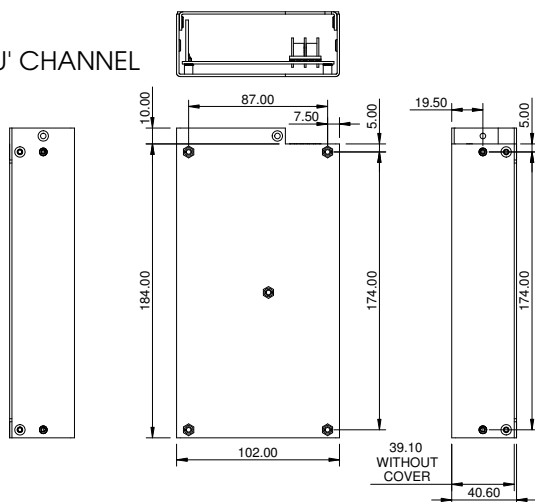

Other dimensions same as cases without fans (above)

Notes 1. All customer fixings M3 2. Maximum Penetration 4.5mm 3. Maximum torque 0.9Nm 4. All tolerances +/-0.5mm

NV-POWER SERIES (NV-300)

LAMBDA EMEA

AUSTRIA

LAMBDA ELECTRONICS GmbH
Aredstraße 22
A-2544 Leobersdorf

Telephone: +43 (0) 2256 655 84
Facsimile: +43 (0) 2256 645 12
Web: www.lambda-austria.com

FRANCE

LAMBDA SAS
ZAC des Delaches, BP1077 - Gometz le Chatel
91940 Les Ulis

Telephone: +33 (0) 1 60 12 71 65
Facsimile: +33 (0) 1 60 12 71 66
Web: www.lambda-f.com

GERMANY

LAMBDA GmbH
Karl-Bold-Straße 40
D-77855 Achern

Telephone: +49 (0) 78 41 666 0
Facsimile: +49 (0) 78 41 5000
Web: www.lambda-germany.com

ISRAEL

NEMIC LAMBDA LTD
Kibbutz Givat
Hashlosa 48800

Telephone: +972 (0) 3 902 4333
Facsimile: +972 (0) 3 902 4777
Web: www.nemic.co.il

ITALY

LAMBDA s.r.l.
Via dei Lavoratori 128/130,
20092, Cinisello Balsamo (Mi)

Telephone: +39 (0) 02 61 29 38 63
Facsimile: +39 (0) 02 61 29 09 00
Web: www.lambda-italy.com

SWEDEN

LAMBDA SCANDINAVIA
PO Box 546, Rallervägen 41
SE-184 25. Åkersberga

Telephone: +46 (0) 8 598 94 090
Facsimile: +46 (0) 8 540 66 096
Web: www.lambda-scandinavia.com

UK

LAMBDA UK
Kingsley Avenue
Ilfracombe Devon EX34 8ES

Telephone: +44 (0) 1271 856666
Facsimile: +44 (0) 1271 864894
Web: www.lambda-gb.com

LAMBDA NORTH AMERICA

visit www.lambdapower.com for a list of Lambda offices and distributors

LAMBDA ASIA

visit www.densei-lambda.com for a list of Lambda offices and distributors

LOCAL DISTRIBUTION