




Fieldbus conection Series 231 (MCS)

DIP switch
for node ID
and baud rate

Configuration interface

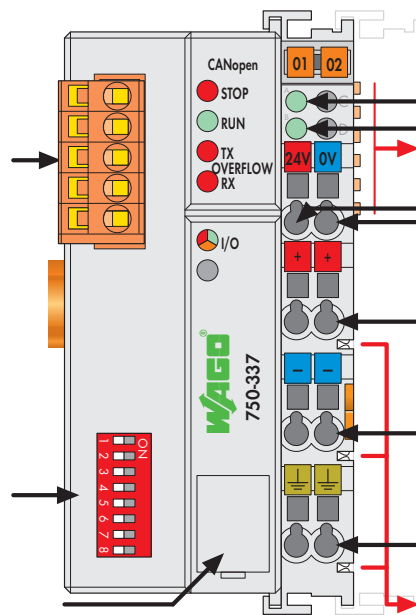

Status
voltage supply
-System
-Power jumper contacts
Data contacts

Supply
24 V
0 V

Supply via
power jumper contacts
24 V

OV

Power jumper contacts

This buscoupler connects the WAGO-I/O-SYSTEM as a slave to the CANopen fieldbus. The module data is transmitted using PDOs and SDOs. The buscoupler automatically configures, creating a local process image which may include analog, digital or specialty modules. Analog and specialty module data is sent via words and/or bytes, digital data is sent bit by bit.

The local process image is divided into two data zones containing the data received and the data to be sent. The process data can be sent via the CANopen fieldbus to the PLC, PC or NC for further processing, and received from the field via CANopen.

The data of the analog modules is stored in the PDOs according to the order in which the modules are connected to the buscoupler. The bits of the digital modules are sent byte by byte and also mapped in the PDOs. If the amount of digital information exceeds 8 bits, the buscoupler automatically starts with a new byte.



All entries of the object dictionary can be mapped - as the user likes - in the 32 Rx PDOs and 32 Tx PDOs.

The complete input and output process image can be transmitted using SDOs. "Spacer modules" can be set via software.

Notice: EDS files required

Description	Item no.	Pack. unit
CANopen MCS	750-337	1
CANopen MSS/T	750-337/025-000	1
Operating temperature -20 °C ... +60 °C		
Accessories	Item no.	Pack. unit
EDS files	Download: www.wago.com	
Miniature WSB quick marking system,		
	plain	248-501 5
	with marking	see pages 256 ... 257
Standards and Approvals	(Product variations available upon request)	
Conformity marking	CE	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
EN 60079-15	I M2 / II 3 GD Ex nA nL IIC T4	
	BR-Ex nA II T4	
Marine applications	see "Approvals Overview" in section 1	

[illegible]

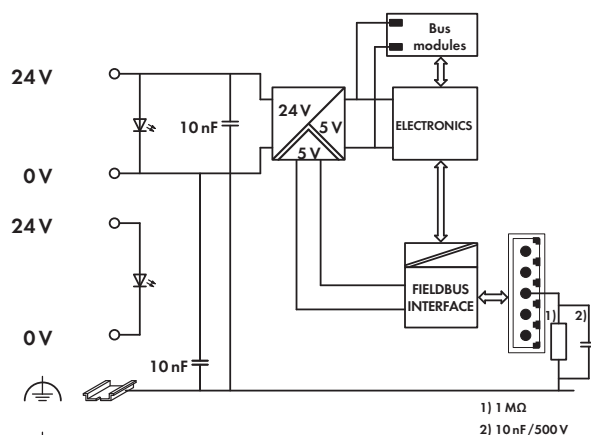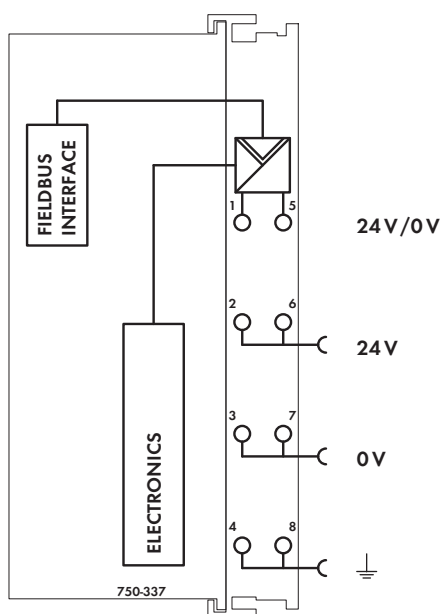

Technical Data

Number of I/O modules	64
Fieldbus	
Max. input process image	512 bytes
Max. output process image	512 bytes
Configuration	via PC or PLC
No. of PDOs	32 Tx / 32 Rx
No. of SDOs	2 server SDOs
Communication profile	DS-301 V4.1
Device profile	DS 401 V2.0
	Marginal check
	Edge-triggered PDOs
	Programmable error response
COB ID distribution	SDO, standard
Node ID distribution	DIP switches
Other CANopen features	NMT slave
	Minimum boot-up
	Variable PDO mapping
	Emergency message
	Life guarding
	Configuration of virtual modules
Voltage supply	DC 24 V (-25 % ... +30 %)
Max. input current (24 V)	500 mA
Efficiency of the power supply	87 %
Internal current consumption (5 V)	350 mA
Total current for I/O modules (5 V)	1650 mA
Isolation	500 V system/supply
Voltage via power jumper contacts	DC 24 V (-25 % ... +30 %)
Current via power jumper contacts (max.)	DC 10 A

General Specifications

Operating temperature	0 °C ... +55 °C
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm² ... 2.5 mm² / AWG 28 ... 14
Stripped lengths	8 ... 9 mm / 0.33 in
Dimensions (mm) W x H x L	51 x 65 x 100
	Height from upper-edge of DIN 35 rail
Weight	200 g
Storage temperature	-25 °C ... +85 °C
Relative air humidity (no condensation)	95 %
Vibration resistance	acc. to IEC 60068-2-6
Shock resistance	acc. to IEC 60068-2-27
Degree of protection	IP20
EMC Immunity to interference	acc. to EN 50082-2 (1996)
EMC Emission of interference	acc. to EN 50081-2 (1994)
EMC marine applications -	
Immunity to interference	acc. to Germanischer Lloyd (2003)
EMC marine applications -	
Emission of interference	acc. to Germanischer Lloyd (2003)