


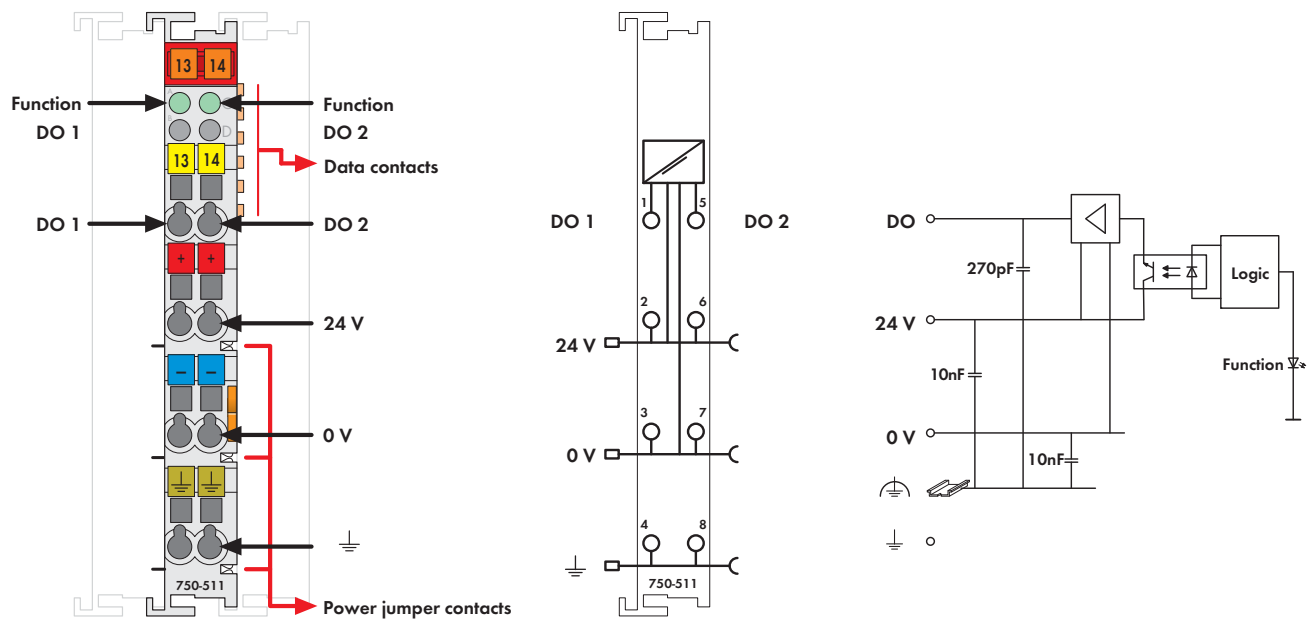

### Delivery without Mini WSB marker

This output module is able to modulate an output with a resolution of 16 bits, with a constant frequency. The field side is electrically isolated from the bus system.

It can also be configured to modulate frequency with a constant duty cycle. Frequency and pulse width cannot be modulated simultaneously.

Outputs are short-circuit-protected.

Actuators with a ground (earth) wire may be directly connected to the module.

| Description                                                                               | Item no.                       | Pack.<br>unit |
|-------------------------------------------------------------------------------------------|--------------------------------|---------------|
| 2DO 24V DC 0.1A/Pulse Width                                                               | 750-511                        | 1             |
| 2DO 24V DC 0.1A/Frequency/2kHz                                                            | 750-511/000-001                | 1             |
| Frequency counter, pulse frequency/pulse duty factor 2 Hz ... 2 kHz / 50 %                |                                |               |
| 2DO 24V DC 0.1A/Pulse Width/100Hz                                                         | 750-511/000-002                | 1             |
| Pulse frequency 100 Hz                                                                    |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
| Accessories                                                                               | Item no.                       | Pack.<br>unit |
| Miniature WSB quick marking system,                                                       |                                |               |
|  plain | 248-501                        | 5             |
| with marking                                                                              | see pages 256 ... 257          |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
| Approvals                                                                                 |                                |               |
| Series 750                                                                                |                                |               |
| Conformity marking                                                                        | C E                            |               |
| UL 508                                                                                    |                                |               |
| ANSI/ISA 12.12.01                                                                         | Class I, Div. 2, Grp. ABCD, T4 |               |
| EN 60079-15                                                                               | I M2 / II 3 GD Ex nA IIC T4    |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |
|                                                                                           |                                |               |

[illegible]