


ECM100 Series

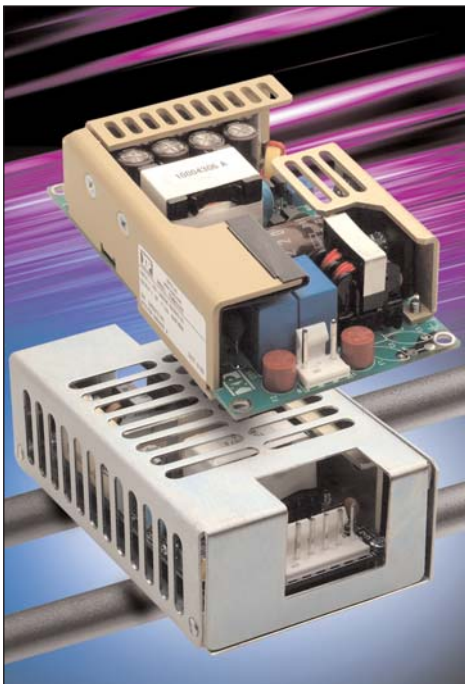

- 100 Watt Models
- Small Size 2.5" x 4.5" x 1.2"
- Low Leakage Current
- Industrial & Medical Approvals
- Convection & Force Cooled Ratings
- Wide Operating Temperature 0 °C to +70 °C
- Level B Conducted Emissions
- EN61000-3-2 Compliant
- Universal AC Input 90-264 VAC
- Input Frequency 47-63 & 440 Hz
- Cover Kits Available
- Mating Connector & Cable Harness Kits Available

Approved for Class I applications, the ECM100 range of single output AC-DC, 100 W power supplies from XP feature the world's smallest footprint for units of these ratings. Size is just 2.5" x 4.5" (63.5 mm x 114.3 mm) and 1.2" (30.48 mm) high. Furthermore, these high-density power supplies meet EN55022 Level B conducted emissions with maximum leakage currents of 100 μ A at 115 VAC or 200 μ A at 230 VAC. As a result, these switchers are equally suitable for industrial, IT and medical applications, with no price premium for meeting medical requirements.

The ECM100 series have single output versions from 3.3 V to 48 VDC, adjustable by $\pm 10\%$. They are dual-fused for compliance with IEC60601-1 and efficiency is 80-85%, depending upon the model, so minimal excess heat is generated.

The power supplies deliver full power between 0 °C and +50 °C and will operate at up to +70 °C with derating and only 5 CFM of cooling. Comprehensive overvoltage, overload and short circuit protection is built in. Covers, cable harnesses and connector kits are available.



T H E X P E R T S I N P O W E R

Input Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage - Operating	90		264	VAC	170-370 VDC
Input Frequency	47	50/60	63	Hz	400 Hz operation available
Power Factor		0.62			230 VAC
Input Current - No Load		40		mA	230 VAC
Input Current - Full Load		0.9		A	230 VAC
Inrush Current			40	A	230 VAC cold start
Earth Leakage Current			100/200	μA	115/230 VAC
Input Protection	T3.15 A/250 V internal fuse in both line and neutral				

Output Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	3.3		48.0	VDC	See Models and Ratings Table
Initial Set Accuracy			$V^1: \pm 1. V^2, V^3 \text{ \& } V^4: \pm 5$	%	
Output Voltage Adjustment	± 5			%	3.3 & 5 V versions
	± 10				All other versions
Minimum Load				A	See model tables
Start Up Delay			2	s	90 VAC
Start Up Rise Time			50	ms	
Hold Up Time	16		75	ms	115-230 VAC input
Drift			± 0.2	%	
Line Regulation			± 0.5	%	90-264 VAC
Load Regulation			± 1	%	Single output versions
			$V^1 \text{ \& } V^2: \pm 1. V^3 \text{ \& } V^4: \pm 5$		Multi output versions
Transient Response			4	%	Recovery to within 1% in less than 500 μs for a 25% load change
Ripple & Noise			1	%pk-pk	20 MHz bandwidth
Overvoltage Protection	115		135	%	V^1 only. Recycle input to reset
Overload Protection	110		150	%	Primary power limit, auto-recovery
Short Circuit Protection					Trip & restart (Hiccup mode)
Temperature Coefficient			0.05	%/°C	

General Specifications

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Reliability and Service Life					
Mean Time Between Failure		250		kHrs	MIL-HDBK-217F
Isolation					
Input to Output Test Voltage	4000			VAC	Test duration: 1 min
Input to Ground Test Voltage	1500			VAC	Test duration: 1 min
Output to Ground Test Voltage	500			VAC	Test duration: 1 min
Other Specifications					
Efficiency		80-85		%	See Efficiency Graphs
Switching Frequency		70		kHz	Fixed
Weight		0.4 (180)		lb (g)	
Power Density			7.40	W/In ³	

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	0		+70	°C	See derating curves
Storage Temperature	-20		+85	°C	
Cooling	5			CFM	For full power operation
Humidity			95	%RH	Non-condensing
Operating Altitude			3000	m	
Shock			30	G peak	Half sine 6 axis
Vibration			2	G rms	5 Hz to 500 Hz, 3 axis

Electromagnetic Compatibility - Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	2	B	
EFT	EN61000-4-4	2	B	
Radiated Field	EN61000-4-3	10 V/m	B	
Surges	EN61000-4-5	3	B	
Conducted	EN61000-4-6	10 V/m	B	
Dips and Interruptions	EN61000-4-11	70% Ut	A	For 10 ms
		40% Ut	B	For 100 ms

Electromagnetic Compatibility - Emissions

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Conducted	EN55022/11	Class B		
Voltage Flicker	EN61000-3-3			
Harmonic Currents	EN61000-3-2	Class A		

Safety Agency Approvals

Standard	Edition
EN60950	2001
UL/cUL 60950	3rd Edition
UL/cUL 60601-1	1st Edition (2003)
IEC 60950	IEC 60950 (2001) 1st Edition
IEC60601-1	IEC 60601-1 (1998) 2nd Edition, amd nos. 1&2

Models and Ratings

Single Output Models

Output Voltage	Output Current Minimum	Output Current Maximum		Ripple & Noise	Model Number
		Convection cooled	5 CFM		
+3.3 V	0.0 A	15.0 A	20.0 A	50 mV	ECM100US03*
+5.0 V	0.0 A	15.0 A	20.0 A	50 mV	ECM100US05*
+7.0 V	0.0 A	11.4 A	14.3 A	70 mV	ECM100US07*
+9.0 V	0.0 A	8.8 A	11.1 A	90 mV	ECM100US09*
+12.0 V	0.0 A	7.5 A	8.3 A	120 mV	ECM100US12*
+15.0 V	0.0 A	6.0 A	6.6 A	150 mV	ECM100US15*
+18.0 V	0.0 A	5.0 A	5.5 A	180 mV	ECM100US18*
+24.0 V	0.0 A	4.1 A	4.1 A	240 mV	ECM100US24*
+33.0 V	0.0 A	3.0 A	3.0 A	330 mV	ECM100US33*
+48.0 V	0.0 A	2.1 A	2.1 A	480 mV	ECM100US48*

Multi Output Models

Power Max Convection	Power Max 5 CFM	Output 1	Imin/Imax	Output 2	Imin/Imax	Output 3	Imin/Imax	Output 4	Imin/Imax	Model Number
80 W	100 W	+5.0 V	0.0 A/12 A	+12.0 V	0.00 A / 3.0 A					ECM100UD21*
80 W	100 W	+5.0 V	0.0 A/12 A	+15.0 V	0.00 A / 3.0 A					ECM100UD22*
75 W	100 W	+5.0 V	0.5 A/10 A	+12.0 V	0.00 A / 3.0 A	-12.0 V	0.0 A / 0.8 A			ECM100UT31*
80 W	100 W	+5.0 V	0.5 A/10 A	+24.0 V	0.00 A / 2.0 A	-12.0 V	0.0 A / 0.8 A			ECM100UT32*
80 W	100 W	+5.0 V	0.5 A/10 A	+15.0 V	0.00 A / 3.0 A	-15.0 V	0.0 A / 0.8 A			ECM100UT33*
65 W	100 W	+3.3 V	0.5 A/10 A	+5.0 V	0.00 A / 5.0 A	+12.0 V	0.0 A / 0.8 A			ECM100UT34*
70 W	100 W	+5.0 V	0.5 A/10 A	+3.3 V	0.00 A / 5.0 A	+12.0 V	0.0 A / 0.8 A			ECM100UT35*
80 W	100 W	+5.0 V	0.5 A/10 A	+12.0 V	0.00 A / 3.0 A	-5.0 V	0.0 A / 0.8 A			ECM100UT36*
70 W	100 W	+5.0 V	0.5 A/10 A	+15.0 V	0.00 A / 3.0 A	-5.0 V	0.0 A / 0.8 A			ECM100UT37*
65 W	100 W	+5.0 V	0.5 A/10 A	+3.3 V	0.10 A / 5.0 A	+12.0 V	0.0 A / 0.8 A	-12.0 V	0.0 A / 0.5 A	ECM100UQ41*
60 W	100 W	+3.3 V	0.5 A/10 A	+5.0 V	0.10 A / 5.0 A	+12.0 V	0.0 A / 0.8 A	-12.0 V	0.0 A / 0.5 A	ECM100UQ42*
80 W	100 W	+5.0 V	0.5 A/10 A	+24.0 V	0.10 A / 2.0 A	+12.0 V	0.0 A / 0.8 A	-12.0 V	0.0 A / 0.5 A	ECM100UQ43*
80 W	100 W	+5.0 V	0.5 A/10 A	+24.0 V	0.10 A / 2.0 A	+15.0 V	0.0 A / 0.8 A	-15.0 V	0.0 A / 0.5 A	ECM100UQ44*
80 W	100 W	+5.0 V	0.5 A/10 A	+12.0 V	0.10 A / 3.0 A	-12.0 V	0.0 A / 0.8 A	-5.0 V	0.0 A / 0.5 A	ECM100UQ45*
80 W	100 W	+5.0 V	0.5 A/10 A	+15.0 V	0.10 A / 3.0 A	-15.0 V	0.0 A / 0.8 A	-5.0 V	0.0 A / 0.5 A	ECM100UQ46*


Notes

1. To receive unit with cover fitted, add suffix '-C' to model number.
2. Output 3 available with opposite polarity for OEM quantities.

3. '*' denotes ECM100 models are class I operation only.

Derating Curves


All ECM100 single output models convection cooled

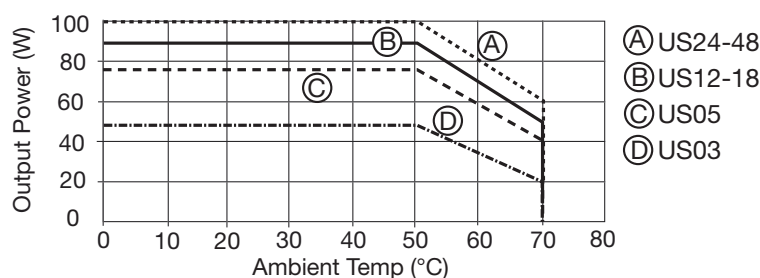


Note:

1. Derate by 10% if cover is fitted.
2. For multi output convection-cooled operation above 50 °C derate linearly to 50% at 70 °C.

All ECM100 models with 5 CFM

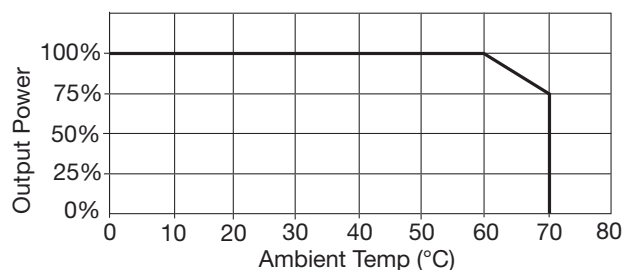


Transient Response

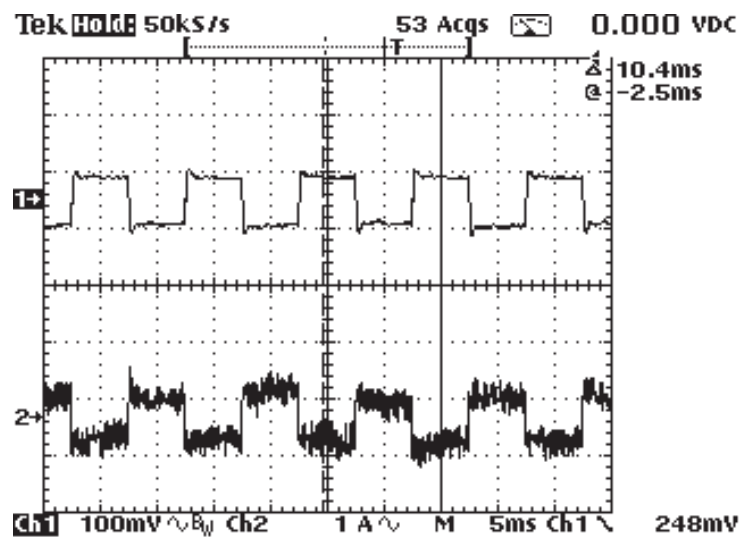


ECM100US24 25% load change

Efficiency Versus Input Voltage

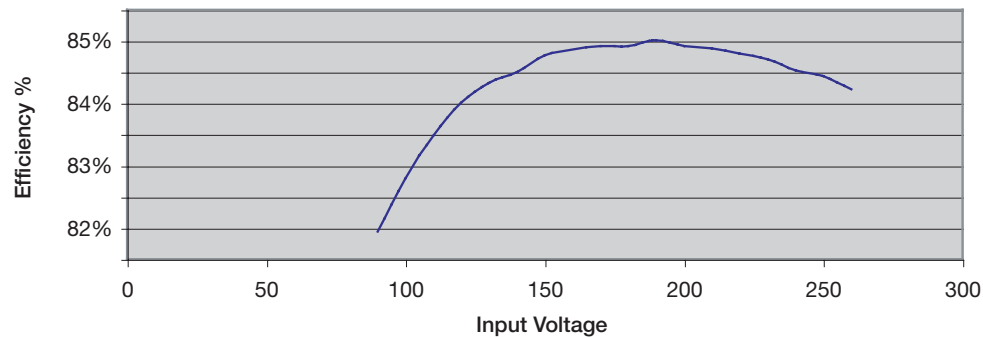


Efficiency shown for ECM100US24

Efficiency Versus Output Load

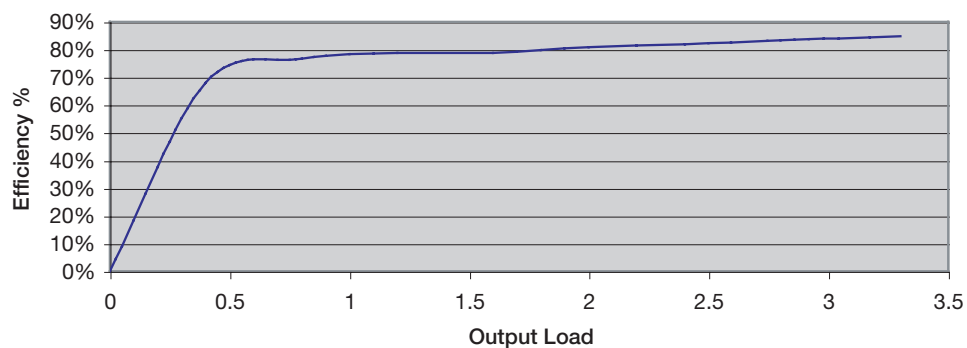


Efficiency shown for ECM100US24

Start Up Delay

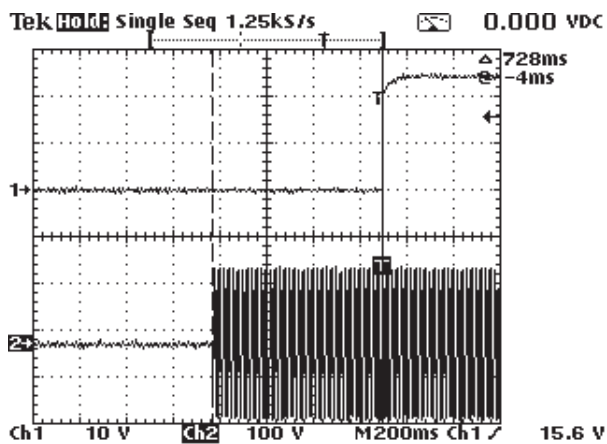


ECM100US24 start up 115 VAC at 100% load

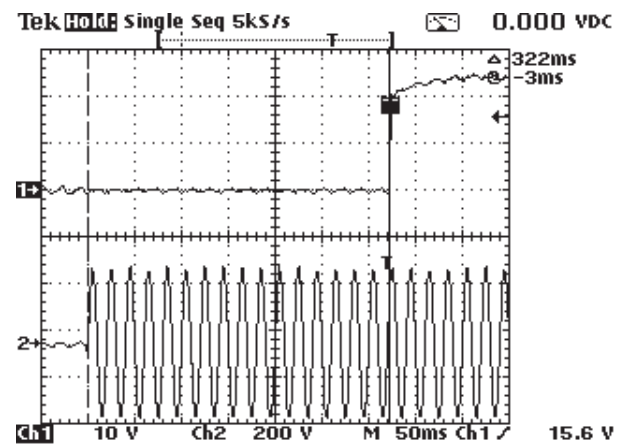


ECM100US24 start up 230 VAC at 100% load

Hold Up Time

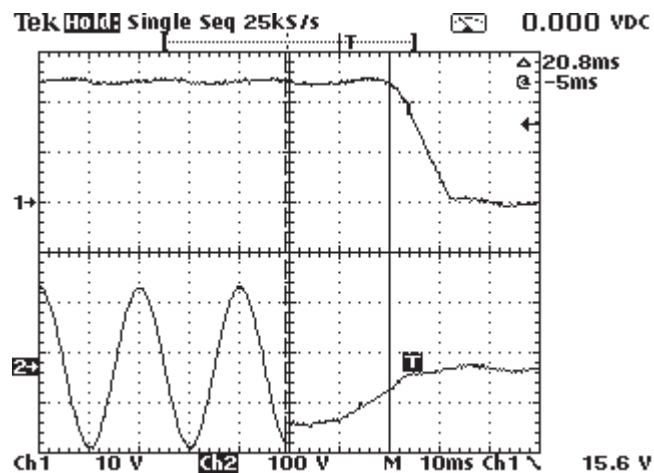


ECM100US24 hold up 115 VAC at 100% load
 Hold up time is 20.8 ms

Overload Characteristics

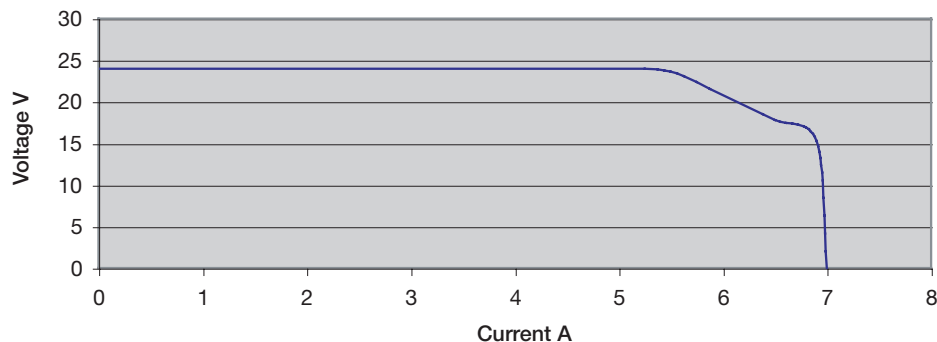


ECM100US24. When current reaches 6.9 A, output goes into trip & restart (Hiccup mode)

Output Ripple & Noise

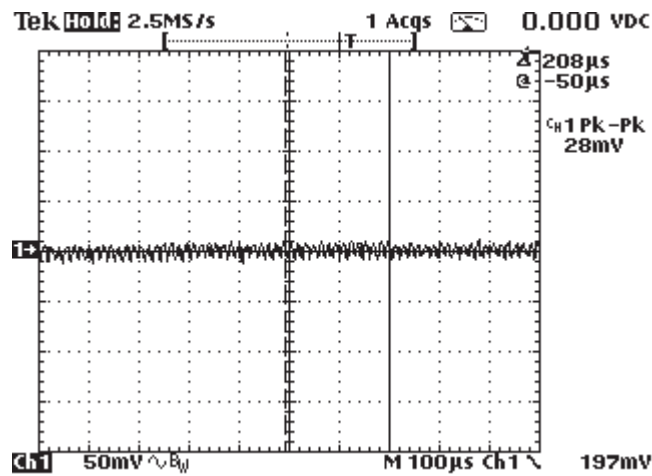


ECM100US24 with 100 W load
Noise measured is 28 mV


Conducted Noise

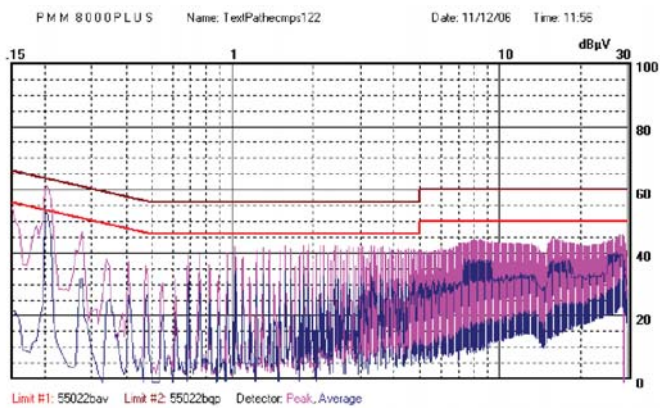


ECM100US12 Class I - Output floating (full load)

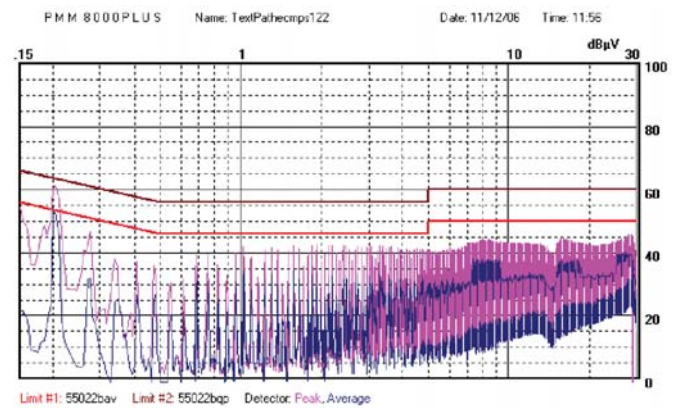

ECM100UQ44 Class I - Output floating (full load)

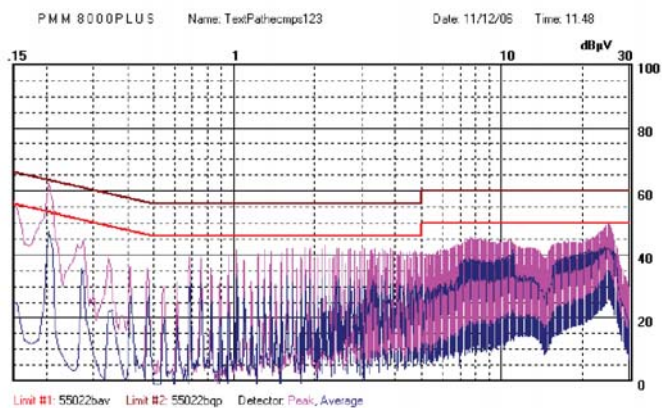

ECM100US12 Class I - Output grounded (full load)

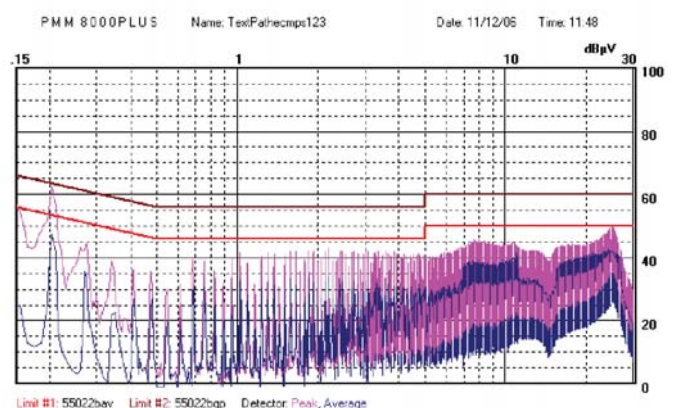


ECM100UQ44 Class I - Output grounded (full load)

Mechanical Details - Single Output Models

Weight: approx. 0.4 lb (180g)

Cover dimensions are 4.96 x 3.05 x 1.52 (126 x 77.5 x 38.5)

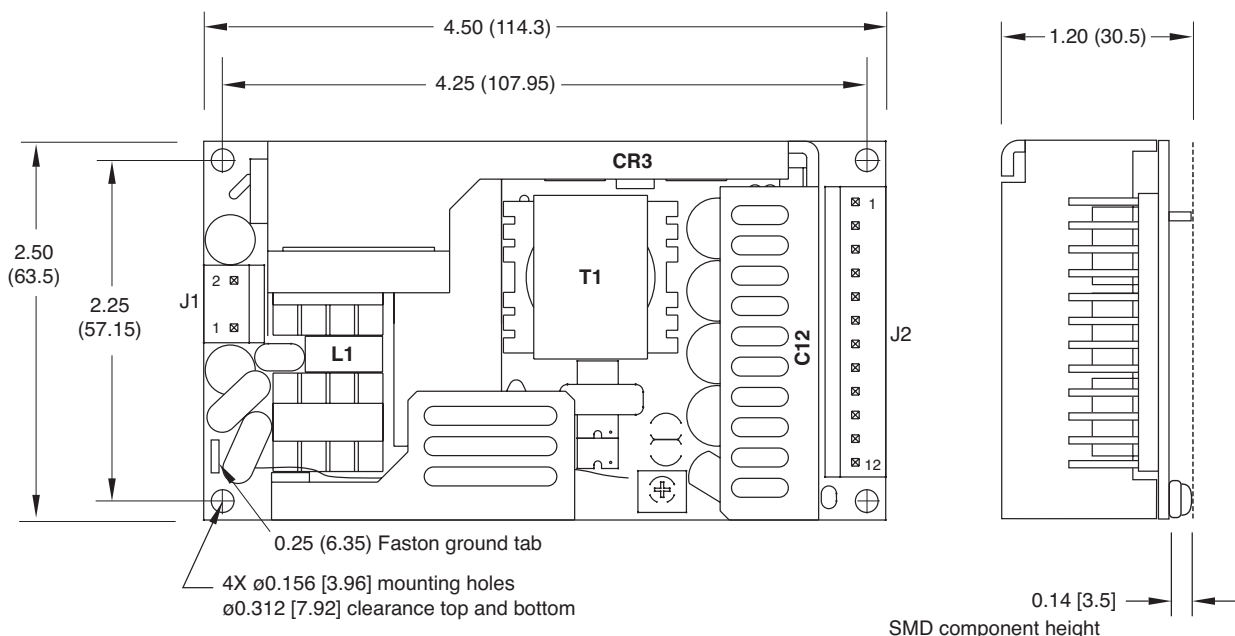

Input Connector J1	
Pin 1	Line
Pin 2	Neutral

J1 mates with Molex housing 09-50-3031 and Molex series 2878 crimp terminals. Optional ground (0.25 faston) tab available.

Output Connector J2	
Pin	Single
1	+V1
2	+V1
3	+V1
4	+V1
5	V1 RTN
6	V1 RTN
7	V1 RTN
8	V1 RTN
9	NOT USED
10	NOT USED
11	NOT USED
12	NOT USED

J2 mates with Molex housing 09-50-3121 & Molex series 2878 crimp terminals (2 pt contact) or Molex housing 09-50-8031 & Molex series 6838 crimp terminals (3 pt contact).

Notes

1. All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
2. Cable harnesses with 300mm wire available. For single output models, order part number ECM100S LOOM.
3. Mating connector kit available. Order part number ECM100 CONKIT.
4. Covers available. Order part number ECM100 COVER.

Thermal Considerations


To ensure correct and reliable operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

Component	Maximum Temperature
L1	110 °C
T1	110 °C
CR3	120 °C
C12	95 °C

Mechanical Details - Multi Output Models

Weight: approx. 0.4 lb (180g)

Cover dimensions are 4.96 x 3.05 x 1.52 (126 x 77.5 x 38.5)

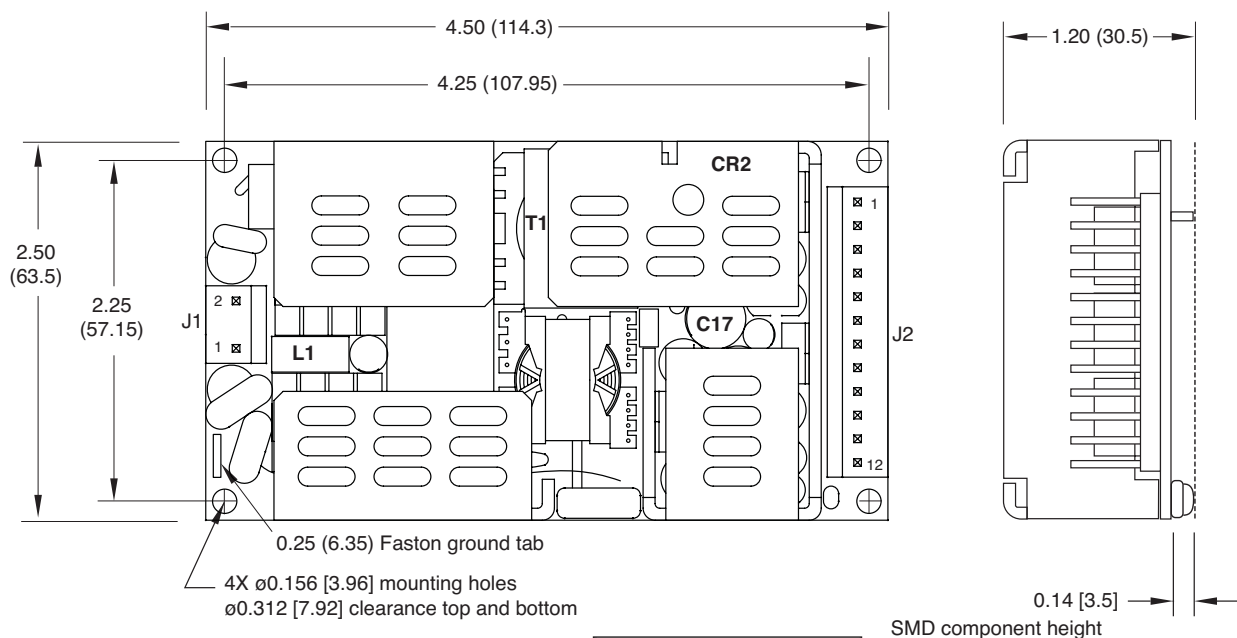

Input Connector J1	
Pin 1	Line
Pin 2	Neutral

J1 mates with Molex housing 09-50-3031 and Molex series 2878 crimp terminals. Optional ground (0.25 faston) tab available.

Output Connector J2	
Pin	Single
1	+V1
2	+V1
3	+V1
4	+V1
5	V1 RTN
6	V1 RTN
7	V1 RTN
8	V1 RTN
9	NOT USED
10	NOT USED
11	NOT USED
12	NOT USED

Notes

1. All dimensions in inches (mm). Tolerance .xx = ± 0.02 (0.50); .xxx = ± 0.01 (0.25)
2. Cable harness with 300mm wire available. For single output models, order part number ECM100S LOOM.
3. Mating connector kit available. Order part number ECM100 CONKIT.
4. Covers available. Order part number ECM100 COVER.

Thermal Considerations

To ensure correct and reliable operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

Component	Maximum Temperature
L1	110 °C
T1	110 °C
CR2	120 °C
C17	95 °C

www.xppower.com

North American Sales Offices

Central Region (972) 578-1530
Eastern Region (973) 658-8001

Western Region (408) 732-7777
Toll Free (800) 253-0490

European Sales Offices

Belgium +33 (0)820 801 401
Denmark 43 42 38 33
France 0820 801 401
Germany 0421 63933-0
Italy 039 2876027

Netherlands 0049 421 639330
Norway +47 63 94 60 18
Sweden 08 555 367 00
Switzerland 056 448 90 80
United Kingdom 0118 984 5515

Distributors

Australia 29 80 95 022 Amtex
Austria 02282 3144 Vitecom
Czech Republic 235 366 129 Vums
Czech Republic 377 824 986 Vienna Trading
Finland 09 2906 1990 Cool Power
Israel 09 7498777 Appletec

Poland 022 8133 145 Vienna Trading
Poland 022 817 80 22 Euro Electronica
Portugal 93 263 3354 Venco
Russia +7(495)234 0636 Prosoft
South Africa 011 453 1910 Vepac
Spain 93 263 3354 Venco

Global Catalogue Distributors

Americas Newark InOne www.newarkinone.com
Europe & Asia Farnell InOne www.farnellinone.com

North American HQ

XP Power
990 Benecia Avenue
Sunnyvale, CA 94085
Phone : +1 408 732-7777
Fax : +1 408 732-2002
Email : nasales@xppower.com

European HQ

XP Power
Horseshoe Park
Pangbourne
Berkshire, RG8 7JW
Phone : +44 (0)118 984 5515
Fax : +44 (0)118 984 3423
Email : eusales@xppower.com

Asian HQ

XP Power
629 Aljunied Road
#04-08 Cititech Industrial Building
389838
Singapore
Phone : +65 68469368
Fax : +65 67418730
Email : apsales@xppower.com



T H E X P E R T S I N P O W E R