

ecoinsight
Energy Efficient High Bright Monitors
for industrial applications


12.1" Daylight Readable Open Frame Monitor


- ✓ Daylight Readable and Energy Saving by use of revolutionary e³ Backlight Technology.
- ✓ Standard Interface DVI-I and 24VDC for easy operation.
- ✓ ecoinsight monitors are available from 12,1" to 17".

Product Characteristics

Article No.	G67598-E1001-R100	Model	eco121SV1001
Resolution	SVGA / 800x600 pixel	Screen Size	30,75 cm / 12.1"
Colours	262.144	Format	4:3
Brightness	1000 cd/m ²	Input Signal	DVI-I (DVI + VGA)
Contrast Ratio	650:1 stat.	Fixture	VESA MIS D STD 100
Viewing Angle (V/H)	120° / 130°	Supply Voltage	24VDC
Response Time	10 ms	Power Consumption	< 25 Watt (typ.) **
Colour Temperature	9000 K (backlight)	Dimensions	289,8 x 218,4 x 47,9 mm
Operating Temperature	0 to +50°C *	Storage Temperature	-10 to +60°C
DVI (CN1)	DVI connector (VGA by adapter)		
+24VDC (CN2)	Barrel Connector outer ø 5,5mm / inner ø 2,5mm (DIN 45323)		

*Measured on front side in the center of the display. ** Power consumption of complete system: Display, Backlight, Display Control.

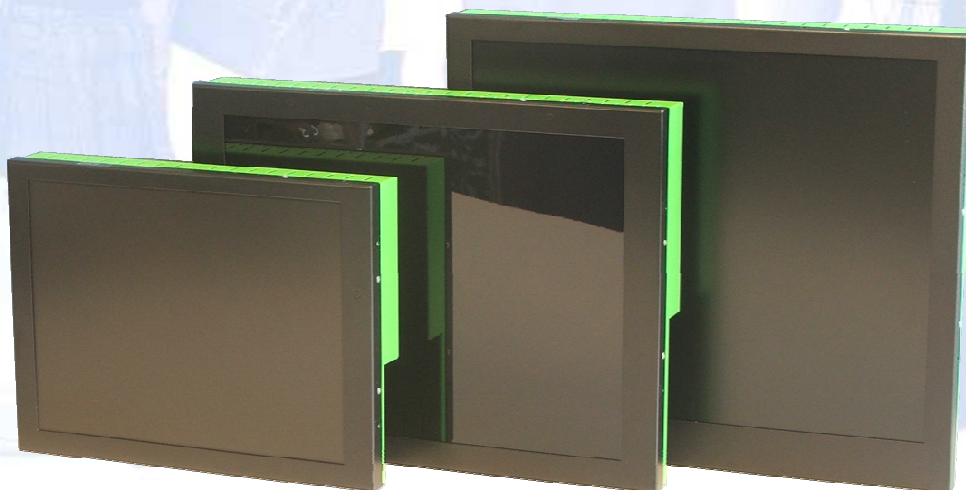

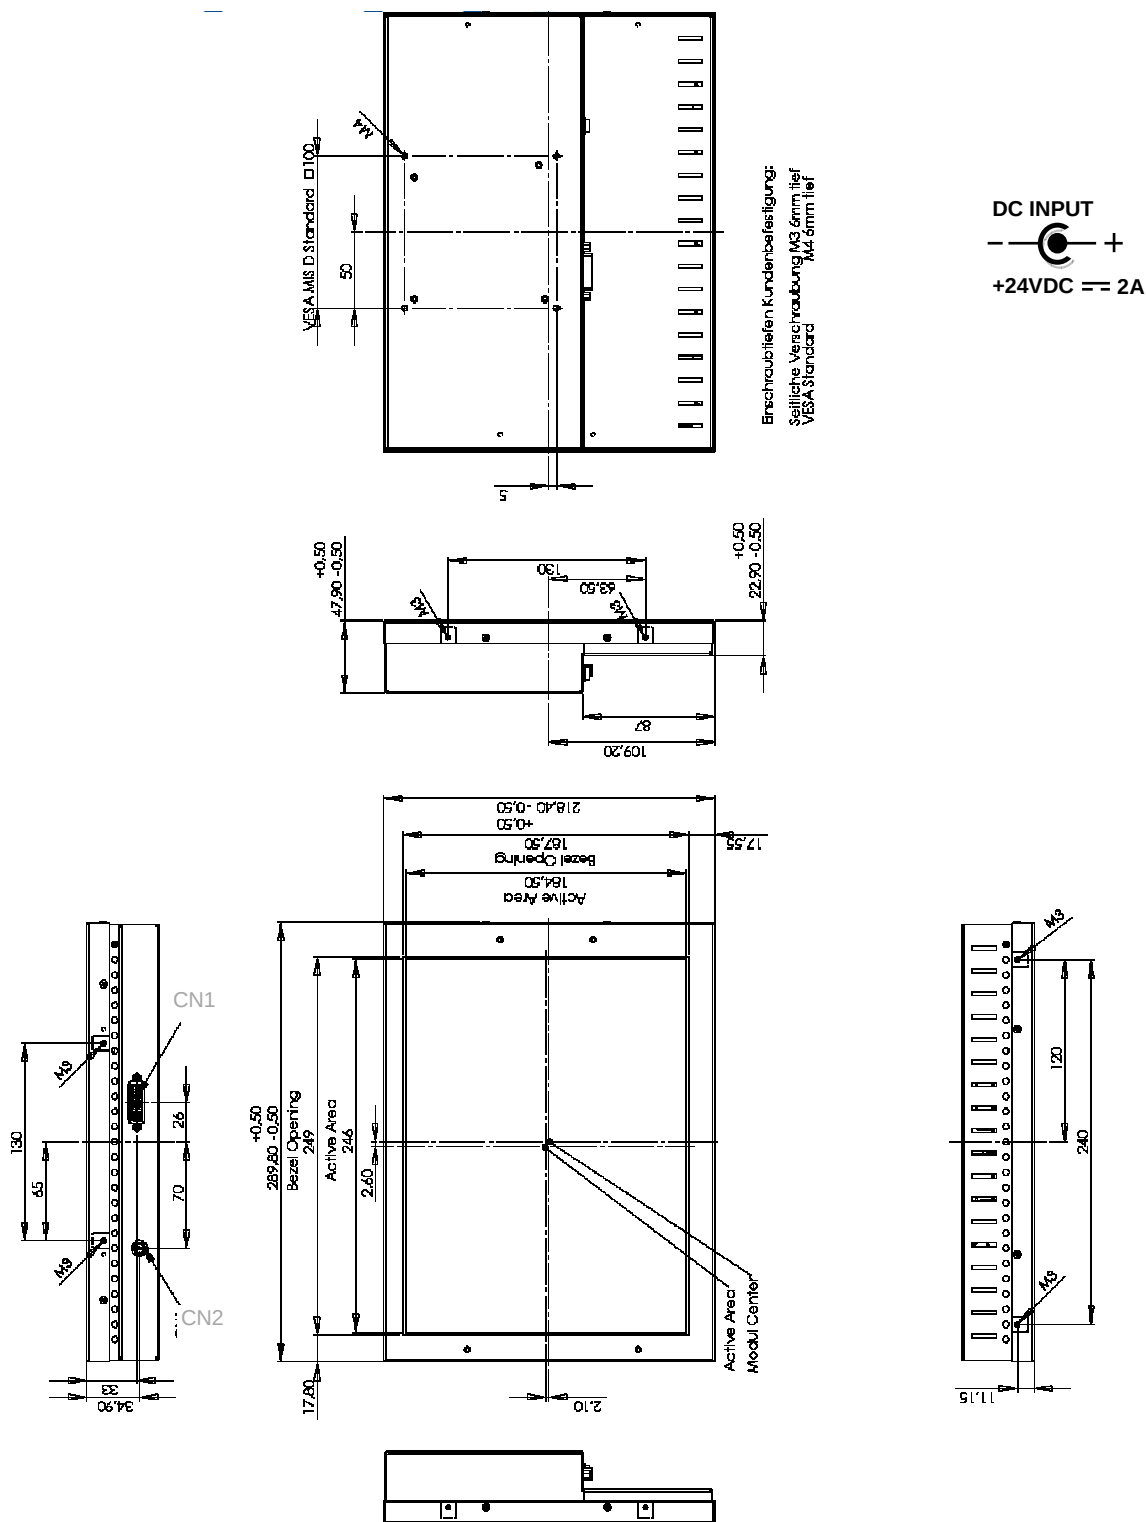

For more information please see our website www.displaynet-lighting.de

i-sft GmbH do not accept any liability whatsoever for topicality, quality, completeness, or correctness of the information provided. Liability claims against i-sft GmbH for material or immaterial damage resulting from utilization or non-utilization of the information provided resp. from utilization of either flawed or incomplete information, are strictly excluded.