

ecoinsight
Energy Efficient High Bright Monitors
for industrial applications


17" Daylight Readable Open Frame Monitor


- ✓ Daylight Readable and Energy Saving by use of revolutionary e³ Backlight Technology.
- ✓ Standard Interface DVI-I and 24VDC for easy operation.
- ✓ ecoinsight monitors are available from 12,1" to 17".

Product Characteristics

Article No.	G67598-E1003-R100	Model	eco170SX1003
Resolution	SXGA / 1280x1024 pixel	Screen Size	43,52 cm / 17"
Colours	16,2Mio.	Format	5:4
Brightness	1600 cd/m ²	Input Signal	DVI-I (DVI + VGA)
Contrast Ratio	950:1 stat.	Fixture	VESA MIS D STD 100
Viewing Angle (V/H)	160° / 160°	Supply Voltage	24VDC
Response Time	1,5 ms	Power Consumption	< 70 Watt (typ.) **
Colour Temperature	9000 K (backlight)	Dimensions	380,8 x 324,4 x 52,15 mm
Operating Temperature	0 to +50°C*	Storage Temperature	-10 to +60°C
DVI (CN1)	DVI connector (VGA by adapter)		
+24V DC (CN2)	Barrel Connector outer ø 5,5mm / inner ø 2,5mm (DIN 45323)		

*Measured on front side in the middle of the display. ** Power consumption of complete system: Display, Backlight, Display Control.

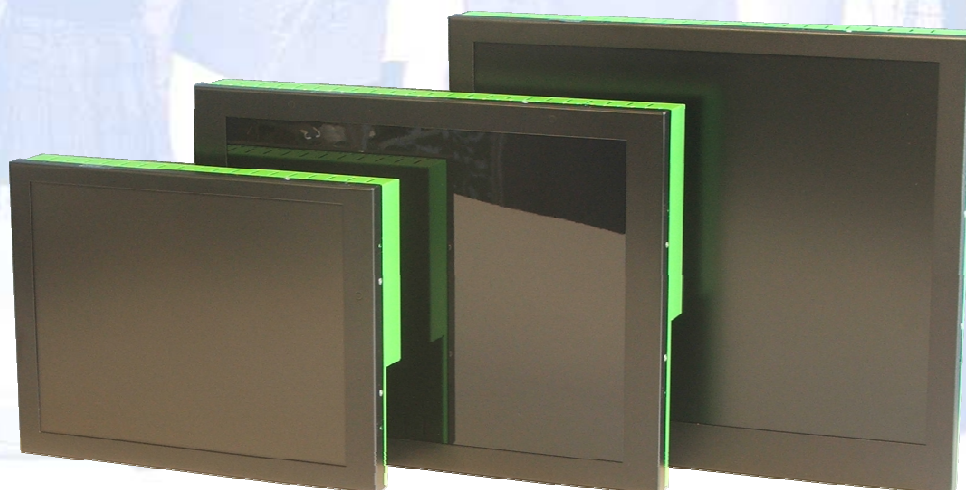

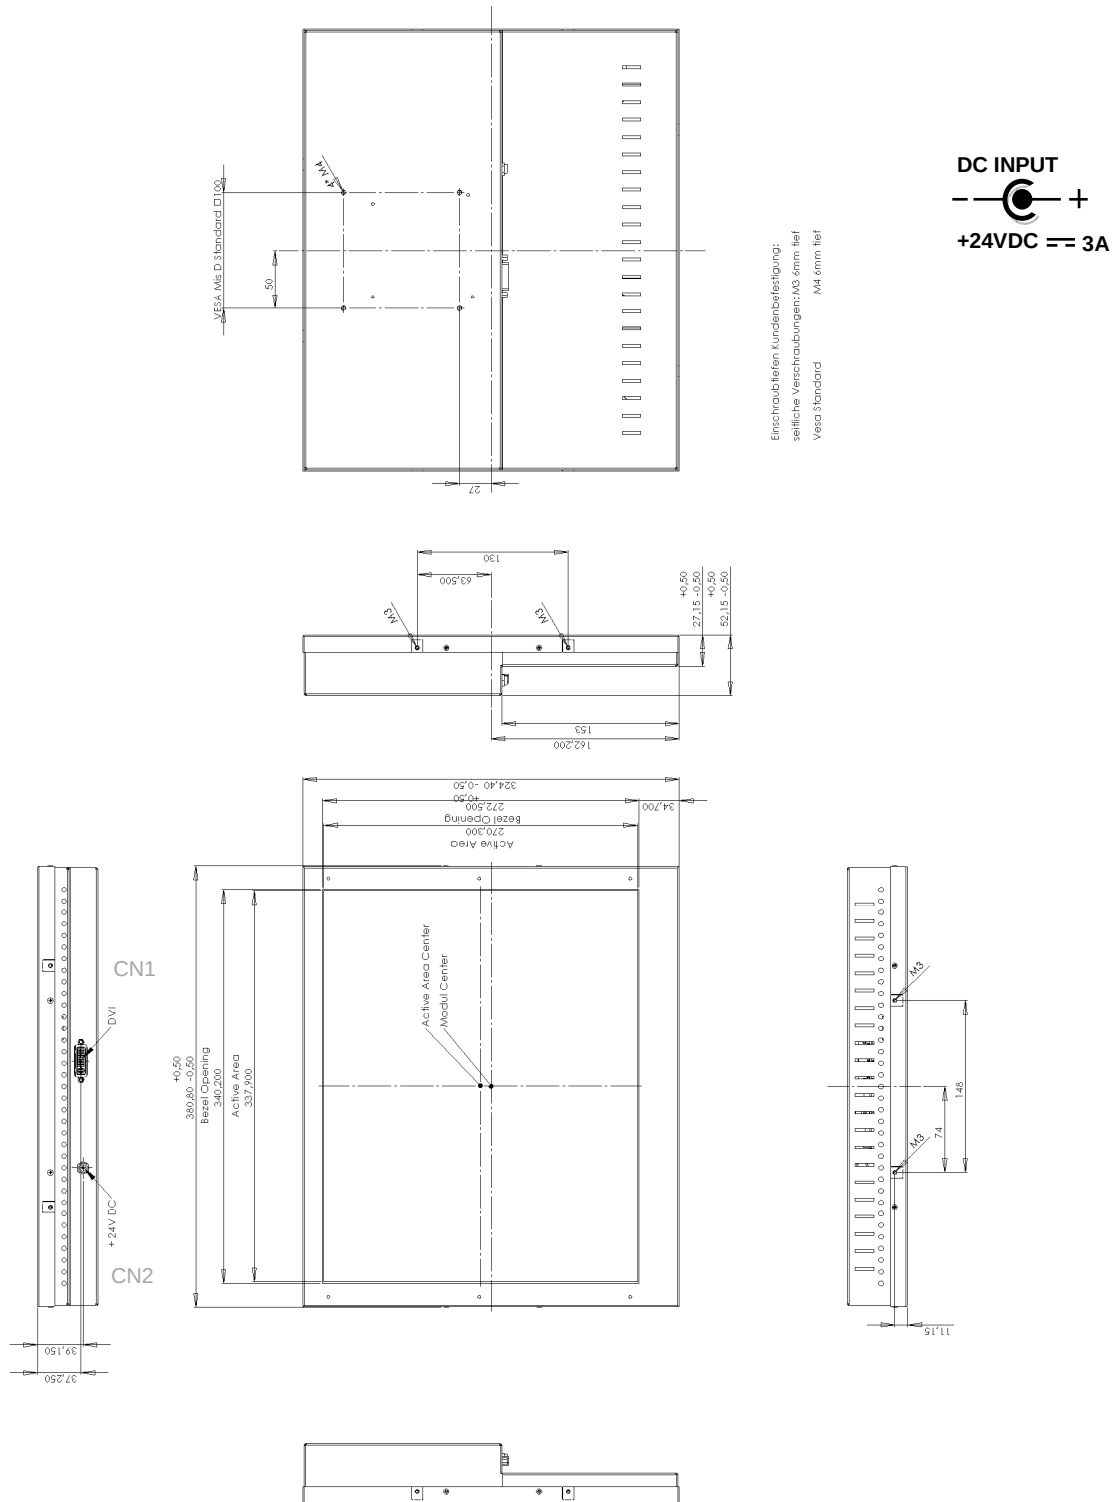

Further Information

Please find prices, contact persons and technical details like drawings, approvals and accessories in our webshop: www.ecoinsight.de.

i-sft GmbH do not accept any liability whatsoever for topicality, quality, completeness, or correctness of the information provided. Liability claims against i-sft GmbH for material or immaterial damage resulting from utilization or non-utilization of the information provided resp. from utilization of either flawed or incomplete information, are strictly excluded.