



Features

- Freescale i.MX535 1GHz on board
- Built-in DDR3-800 1GB RAM
- Fanless Design
- Supports USB-OTG
- 4-wire resistive touch panel
- SD card / Micro SD support


Specifications

CPU Type	Freescale i.MX535
System Speed	1.0 GHz
Memory	DDR3 1GB on board
Construction	Plastic
Chassis Color	Black & Silver
Front Panel External I/O	IR sensor, Home and Return keys
Rear Panel External I/O	1x 10/100 LAN RJ45 (POE optional) 1x USB (USB Host, A-Type) 1x USB OTG (mini USB B-type) 1x COM1 RS-232 for RJ45 connector 1x 12V DC-IN jack with lock 1x HDMI
Storage	SD/Micro SD card, 4GB eMMC (optional)
Mounting	IPPC07A5-RE: VESA mount, 75mm x 75mm IPPC10A5-RE: VESA mount, 100mm x 100mm
Power Supply	60W power adaptor
Dimensions	IPPC07A5-RE: 195mm(W) x 28mm(D) x 137mm(H) IPPC10A5-RE: 267mm(W) x 27mm(D) x 170mm(H)
LCD Size	IPPC07A5-RE: 7" TFT LCD IPPC10A5-RE: 10.1" TFT LCD
LCD Color	16.7M colors
Touch Screen	4-wire resistive touch panel
Display Resolution	IPPC07A5-RE: 800 x 600 with LEDs IPPC10A5-RE: 1280 x 800 with LEDs
LCD Brightness	350 cd/cm2
Operating Temperature	0°C~ 45°C (32°F~113°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5 ~ 90% @ 45°C, non-condensing

Ordering Information

IPPC07A5-RE	RISC 7" Panel PC with resistive touch, Freescale 1GHz CPU, 1GB DDR3 on board, 60W power adaptor
IPPC10A5-RE	RISC 10.1" Panel PC with resistive touch, Freescale 1GHz CPU, 1GB DDR3 on board, 60W power adaptor

IPPC10A5-RE Dimensions

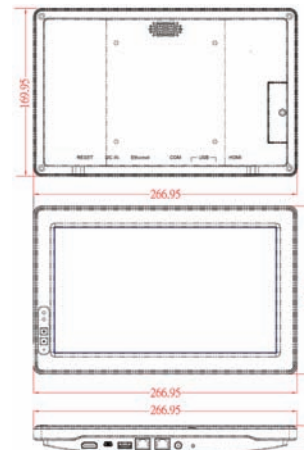

IPPC07A5-RE Dimensions

