



ProjectWorX

Project Reporting and Diagnostics



APPLICATION NOTE

August 2014

Description: Guide to setting up, understanding and using Project Reporting.

General Requirement: Version 10.85 or later installed, SQL Server 2012 or 2014 with Reporting Services installed, basic GENESIS64 knowledge. For Report Template editing or creation, basic SQL knowledge is required.

Introduction

The Project Reporting feature, introduced in version 10.85, allows users to report on the data sources in use by their project. The data sources can be checked for validity so that incorrect tags can be quickly identified. It can aid in troubleshooting problems that may occur during initial setup, project deployment, or during runtime.

This application note will describe how to enable Project Reporting, the two types of reports (Configured Tags Report and Runtime Use Report), the different reporting actions, and some options.

Enabling Project Reporting

Project Reporting requires SQL Server Reporting Services (SSRS) for the actual report generation. The recommended approach is to have both the SQL Server Engine and the SSRS on a single server, however with the appropriate SQL Server licenses they can exist on separate nodes.

To enable Project Reporting during installation, check the **Enable Project Reporting** box and if necessary fill in your SSRS URL as shown in Figure 1.

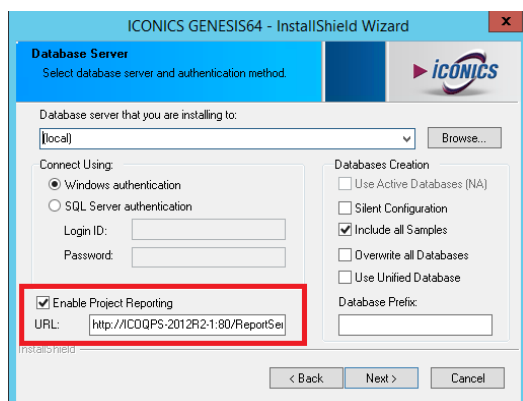


Figure 1 - Enabling Project Reporting during installation

If SSRS was not installed until after the installation, or if you otherwise did not enable Project Reporting during the install, please follow these steps to enable project reporting:

1. From the **Components** folder (located by default at "C:\Program Files\ICONICS\GENESIS64\Components") launch "IcoWorkbenchSqlSetup.exe".
2. On the **Project Reporting** tab, check the **Enable Project Reporting** box.
3. If necessary, use the **Configure SSRS** button to automatically configure SSRS.

NOTE: A remote SSRS server cannot be auto-configured. It must be manually configured through the SQL Server Reporting Services Configuration Manager.

4. Select or type in your SSRS URL.
5. Click **Apply**.

Running Reports

All reports are triggered from **Workbench-SL** on the **ProjectWorX** ribbon. To run a report, click the desired report type and follow the prompts. More information on the different report types and their options will be in the following sections.

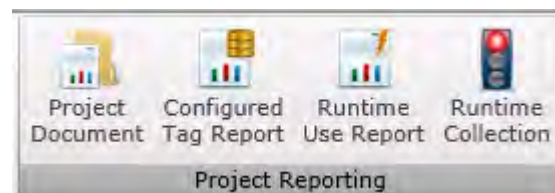


Figure 2 - Project Reporting section of the ProjectWorX ribbon

A running or completed report will show up in the **Task Explorer**. The Task Explorer will be shown automatically after you have triggered a report. If you do not see the Task Explorer you can go to the **ProjectWorX** ribbon in the **Show/Hide** section and check the **Show the Tasks Panel** box.

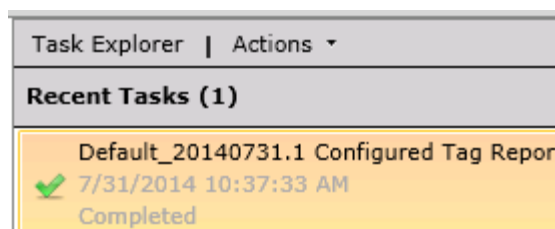


Figure 3 - Task Explorer showing a completed report



ProjectWorX

Project Reporting and Diagnostics



APPLICATION NOTE

August 2014

Right-click on the completed task to view a report, download it in PDF or Excel format, view the log, re-execute the report, or delete it from the task list.

Report Metadata

Reports can contain important metadata such as Author, Project Name or Project Version. This information can be entered during the creation of a new project in Workbench-SL or on the **ProjectWorX** ribbon in the **Project Properties** section.

Configured Tags Report (Output Data Sources)

The Configured Tags Report will use static collection to gather all of the configured tags in a project, and can optionally validate those tags to ensure they do not contain typos or are otherwise invalid.

This report type is designed to look for "output" data sources – data sources provided by ICONICS software. It will report on these products:

- AssetWorX
- BACnet
- Energy AnalytiX

This report will take the following actions (which are described in further detail in the "Reporting Actions" section):

- a. Static Collection
- b. Validation (optional)
- c. Report Generation

To generate a Configured Tags Report, perform following steps:

1. In **Workbench-SL**, go to the **ProjectWorX** ribbon and click **Configured Tag Report**.
2. Click **Next**.
3. Fill in a description for this task, if desired. Select a **Report Template** from the list of available templates on the server, or upload new one by using the "..." button. Click **Next**.

NOTE: See the section entitled "Creating New Report Templates" for more information on creating your own templates.

4. Select the configuration databases for the Static Collection phase. Click the "..." button at the end of each row if you'd like to report on only a specific part of the database. Click **Next**.

NOTE: For more information about Static Collection, see section "Reporting Actions" and sub-section "Static Collection".

5. If you'd like to validate your tags, check the **Validate collected tags box**. Click **Finish**.

NOTE: For more information about Validation, see section "Reporting Actions" and sub-section "Validation".

6. After you click Finish, the report progress should appear in the **Task Explorer**. When the task is finished you can display or download the generated report by right-clicking the completed task.

Project Document (Combined Configured Tags Report)

The Project Document button on the Project Reporting ribbon allows you to run a Configured Tags Report with multiple templates, combined into a single file. Other than the option to choose a cover page and pick more than one template, it works the same as a Configured Tags Report.

Runtime Use Report (Input Data Sources)

The Runtime Use Report will collect all of the data sources used as inputs into any ICONICS client or server using FrameWorX.

In addition to reporting on actively used data sources, the Runtime Use Report can also look through these configuration databases for inputs:

- AlarmWorX64 Server
- AssetWorX
- Hyper Historian
- Quality AnalytiX
- TrendWorX64 Logger
- Unified Data Manager

This report will take the following actions (all of which are optional, and all of which are described in further detail in the "Reporting Actions" section):

- a. Static Collection
- b. Runtime Collection*
- c. Validation
- d. Report Generation

NOTE: Runtime Collection must be started manually. Any Runtime Collection data gathered so far will be included in a Runtime Use Report. See the "Reporting Actions" section and "Runtime Collection" subsection for more details.

To generate a Runtime Use Report, perform following steps:

1. In **Workbench-SL**, go to the **ProjectWorX** ribbon and click **Runtime Use Report**.
2. Click **Next**.



ProjectWorX

Project Reporting and Diagnostics



APPLICATION NOTE

August 2014

3. Fill in a description for this task, if desired. Check the **Generate a report at the end of the task** box if you would like to see a report at the end of this task, then select a **Report Template** from the list of available templates on the server, or upload new one by using the "... " button. Click **Next**.

NOTE: See the section entitled "Creating New Report Templates" for more information on creating your own templates.

4. If you would like to do a Static Collection, check the **Scan active configuration databases and collect all the tags used** box and select the configuration databases. Click the "... " button at the end of each row if you'd like to report on only a specific part of the database. Click **Next**.

NOTE: For more information about Static Collection, see section "Reporting Actions" and sub-section "Static Collection".

5. If you'd like to validate your tags, check the **Validate collected tags box**. Click **Finish**.

NOTE: For more information about Validation, see section "Reporting Actions" and sub-section "Validation".

6. After you click Finish, the report progress should appear in the **Task Explorer**. When the task is finished you can display or download the generated report by right-clicking the completed task.

Reporting Actions

The following sub-sections are descriptions of the different actions a report can take.

Static Collection

The configuration databases of the given modules are examined for data source names. This approach is faster and more efficient than runtime collection, but limited to finding non-dynamic and non-aliased tags.

Both report types can perform a static collection, however they are looking for different types of data sources. The Configured Tags Report is looking for "output" tags, and the Runtime Use Report is looking for "input" tags.

For example, when reporting on an AssetWorX configuration, the Configured Tags Report would find tags such as:

ac:Company/Foxboro bakery/North/Baking line/Ingredients mixing tank/Heating control/CurrentTemperature

The Runtime Use Report, however, would find whatever tag was used as an input to that asset (if any).

Runtime Collection

A monitoring mechanism within FrameWorX is used to collect all data points as they are requested in runtime. This approach requires that the project be active and in use in order for all tags to be gathered, but it is able to identify aliased or otherwise dynamic tags, such as those created by scripts or smart symbols.

Runtime Collection has the potential to slow down FrameWorX communication (and the system performance in general), so it should only be turned on when necessary.

To begin Runtime Collection, click the **Runtime Collection** button on the ProjectWorX ribbon. The spotlight should turn green. To stop Runtime Collection, click the button again and the spotlight should turn red. If it is in run mode, Runtime Collection will remain running if Workbench-SL is shut down.

Runtime Collection is cumulative. Each time the Runtime Collection is triggered its results will be merged with the results of the previous Runtime Collection. This allows for users to collect runtime data on their system in stages, if desired, to avoid long periods of slow performance on a system while Runtime Collection is left running.

To flush previously collected Runtime Use data and start a new Runtime Use Report from scratch, go to the Task Explorer and select **Actions → Clear Runtime Use Data**.

There may be times when a known invalid point is requested very briefly, most notably when switching GraphWorX64 screens and loading aliases at the same time. These points are generally unsubscribed very quickly. Runtime Collection has a built-in timeout that requires that points remain subscribed for a minimum of 1 second before they are included in a report. This timeout can be adjusted. Go to the **Task Explorer**, then click **Actions → Configure Runtime Collection**.

Validation

Data sources collected by either Static or Runtime Collection can optionally be validated in both types of reports. FrameWorX briefly subscribes to each point to verify that the tag exists on the OPC server and notes the status or quality returned. This can reveal incorrectly configured or invalid data sources.

There are a few settings for tag validation which can be changed when running a report and choosing the Validation option.



ProjectWorX

Project Reporting and Diagnostics



APPLICATION NOTE

August 2014

Max concurrent points – This is the number of points (tags) that are allowed to be on scan at same time. This setting is designed to can help you to prevent overloading of data source (e.g. OPC or BACnet device), FrameWorX Server, or your license.

Timeout (sec) – this value defines timeout for getting a value in seconds, otherwise quality of this point will be marked as BAD without any value.

For example, if the max concurrent points is 100, and the timeout is 60 seconds, FrameWorX will subscribe to the first 100 points in the queue and wait for a value. Once a value is returned for any of those points it will unsubscribe to that point and subscribe to a different point from the queue. If a subscribed point goes more than 60 seconds before returning a value it will also be unsubscribed and a new point from the queue will be subscribed.

In this way it will eventually subscribe to all points in the queue, ensuring that no more than 100 points are subscribed at any one time. This means that if there are 1,000 total points to validate and none of them are going to return a value (such as if the OPC server does not exist or is hung), the total validation time may be as long as 600 seconds (1,000 divided into 10 groups of 100, each group taking 60 seconds for all of its points to time out).

Report Generation

This step uses SQL Server Reporting Services to create a report with the results. The ICONICS installation comes with several pre-defined report template, but the user can create custom report templates. For more information, see the section entitled, "Creating New Report Templates".

Creating New Report Templates

ICONICS installations come with pre-created reporting templates, stored in **C:\ProgramData\ICONICS\Reporting** by default. The **AvailabilityReport** subfolder contains report templates for the Configured Tags Reports. The **UsageReports** subfolder contains report templates for Runtime Use Reports. The **CoverPages** subfolder contains cover pages usable in a Project Document.

When creating your own templates it is recommended to use an existing report templates as starting point – copy an existing report and rename it, then edit it from there.

To be able to create new or edit existing report templates you must have the **Microsoft SQL Server Report Builder** installed.

NOTE: This section discusses only the steps and information unique for ICONICS Project Reporting. For more information on the Microsoft SQL Server Report Builder or SQL Server Reporting Services, consult Microsoft documentation, online help, or tutorials.

Each report template must contain:

- Specific set of **parameters** (see below).
- A **Data Source** pointing to the database which contains the collected data.
- One or more **Datasets** defining a query to retrieving the data from the data source.

Report Template Parameters

For proper reporting functionality is it important to have a report template containing following Report Parameters with these properties:

Common parameters (for all reports)

Name	Prompt	Data type	Allow blank	Allow null
ProjectName	ProjectName	Text	Yes	Yes
ProjectVersion	ProjectVersion	Text	Yes	Yes
ProductVersion	ProductVersion	Text	Yes	Yes
Author	Author	Text	Yes	Yes
Validation	Validation	Bool	N/A	No
LogoFileName	LogoFileName	Text	Yes	Yes
ImageServer	ImageServer	Text	Yes	Yes

NOTE: The Validation parameter determines if the validation columns should be shown. It will be set to True by reports where the user has opted to use the "Validation" feature.

Parameters for specific report types:

Report type/module	Name	Prompt
Usage	SnapshotID	SnapshotID
Configured from AssetWorX	AscReportID	{{AssetWorX}} ReportID
Configured from BACnet	BacReportID	{{BACnet}} ReportID
Configured from EA	EaReportID	{{Energy Analytix}} ReportID

The specific report parameters above all have a data type of Integer and do not allow null values. They will be used in queries to filter data within specific collection snapshots. Snapshot management is a feature planned for future releases, and it is highly recommended to include these parameters in your reports to avoid the need to edit your reports after upgrading to a version that includes snapshot management. For example, if you want to create a configuration tag report template that contains data from



ProjectWorX

Project Reporting and Diagnostics



APPLICATION NOTE

August 2014

AssetWorX and BACnet snapshots you should specify both parameters in your template.

Report Logo

The **LogoFileName** and **ImageServer** parameters will get their values from the Project Reporting engine. If you want to replace the default ICONICS logo with your own, replace **DefaultCover.jpg** and **DefaultSmall.jpg** with similarly-sized images. These files are located by default at:

C:\Program Files\ICONICS\GENESIS64\WorkbenchSL\Reporting\Logos

For the Logo image source use following expression:

```
= "http://" & Parameters!ImageServer.Value &  
"/WorkbenchSL/Reporting/Logos/" & Parameters!LogoFileName.Value
```

Report Template Data Source

During the ICONICS installation (or when using the IcoWorkbenchSqlSetup.exe tool) a data source for Project Reporting data should have been created. If your report template does not already contain this data source, follow these steps:

1. In the **Report Data** panel, right-click **Data Sources** and choose **Add Data Source...**
2. Name the data source "IcoReporting".
3. Select **Use a shared connection or report model**.
4. Click the **Browse...** button and browse for your server, or enter your server URL (the same one you chose during installation or when running IcoWorkbenchSqlSetup.exe), which should look something like:
http://localhost/ReportServer
5. In the **SCADA Reporting** folder you should find a Data Source file pointing to collected data.
6. Click **OK**.

Report Template Dataset

The Report Template Dataset is a key object for querying the database tables for the collected data and filtering the data if necessary.

The **IcoReporting** database contains the report data. When building queries for your reports, look for tables and views that start with these prefixes:

Prefix	Report Type	Source
R_ASC_*	Configured Tags Report	AssetWorX
R_BAC_*	Configured Tags Report	BACnet
R_EA_*	Configured Tags Report	Energy AnalytiX
R_TU_*	Runtime Use Report	Runtime Collection

The following is an example of how to query for AssetWorX tags in a Configured Tags Report template:

1. In your report template make sure you have correctly set the parameters and data source.
2. In the **Report Data** panel, right-click **Datasets** and choose **Add Data Source...**
3. Give the dataset a name.
4. Select **Use a dataset embedded in my report**.
5. Choose the **IcoReporting** data source.
6. Leave the **Query Type** set to **Text**.
7. Click **Query Designer...** to open the query designer wizard.
8. In the **R_ASC_AvailabilityData_View** View check **Name**, **ConfigurationPath**, **Description** and **Value** columns.
9. Click **OK**.
10. In the "Dataset Properties" dialog you should now see your generated query. Add a WHERE clause manually to ensure that data only for the specific report is retrieved. The line to add is:

```
WHERE ParentID = @ParentID
```

11. Select **Parameters** in the side panel and bind the "@ParentID" parameter to a value of "[@AscReportID]".
12. Click **OK** to the Dataset Properties dialog.

For more examples on how to query this data, see the datasets in the existing report templates.

Report Template Object Configuration

The last step is to insert the objects that will visualize the collected and queried data. Below is an example of how to insert a table.

1. Go to the **Insert** ribbon of Report Builder.
2. Click **Table → Table Wizard** in the **Data Regions** section.
3. Select an existing dataset that you created earlier and click **Next**.
4. Drag and drop the available fields into the Values section. If desired, use the Row and Column sections to aggregate fields. When your fields are arranged as desired, click **Next**.
5. Preview your table and change options as desired. Click **Next** when finished.
6. Choose a style and click **Finish**.