



How to Configure Windows Server 2003 for WEBHMI

APPLICATIONS NOTE

November, 2003



Description: This document demonstrates how you can configure IIS 6.0 on Windows Server 2003. If IIS on Windows Server 2003 is not configured properly you will not be able to view WebHMI samples files.

OS Requirements: The required operating system is Windows 2003 WEB / Standard/ Enterprise Edition.


General Requirements:

Genesis 7.0 / WEBHMI 7.0


IIS 6.0 Server Configuration:

Open Internet Information Manager. Click on WEB Sites. Expand Default Web Site.


Right Click on WEBHMI folder under Default Web Site.

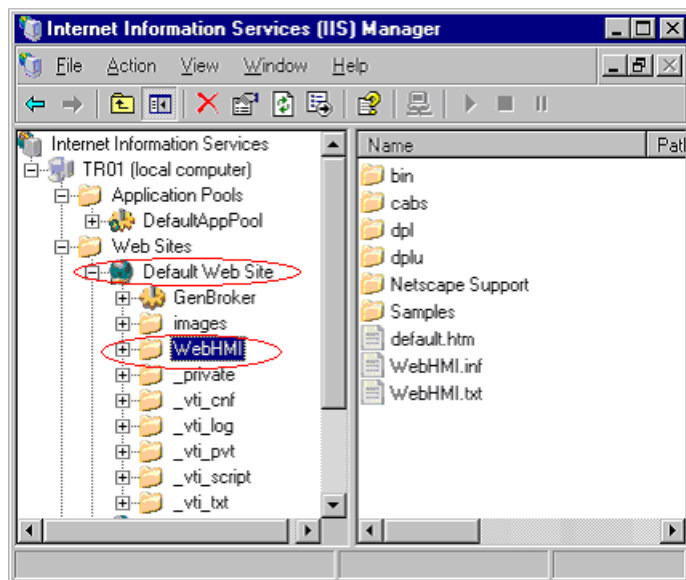

Open Properties on WebHMI and Click on HTTP Headers

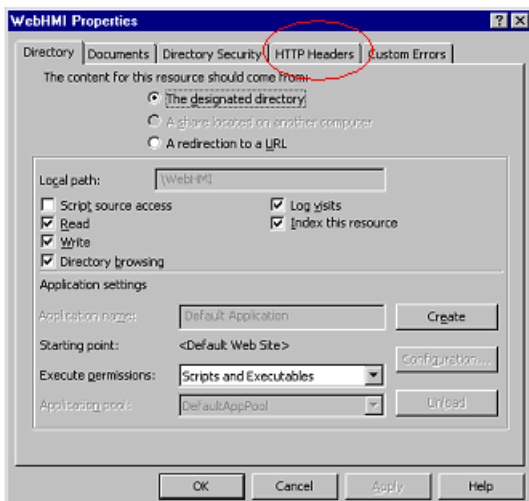


Click on MIME Type TAB

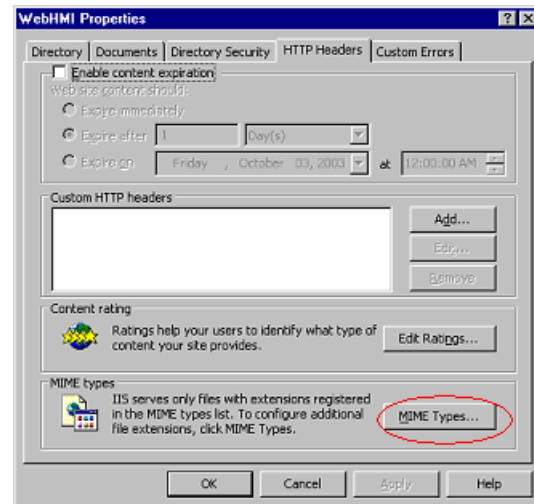

Caution IIS 6.0 returns an error (404.3) if a request refers to a file with a file extension that is not in the MIME map or script mapped. If you want to allow IIS to serve all files regardless of their extension, you have to either add the particular extension or a wildcard (*.*) to the MIME map.

Click on new and add a wildcard (*.*) to the MIME type exactions.

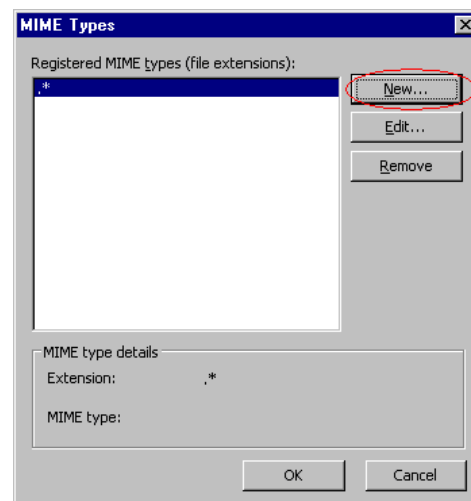

After this configuration you should be able to view WebHMI Sample pages on the same server or a remote client

NOTE: Other security setting may require a valid login to IIS
Once Windows Server 2003 is restarted the setting may require re-configuration