



ICONICS, Inc.
100 Foxborough Blvd.
Foxborough, MA 02035
Phone: (508) 543-8600
Fax: (508) 543-1503
[Worldwide Support Centers](#)
www.iconics.com



© **ICONICS, Inc. All rights reserved.**


Specifications are subject to change without notice.
GENESIS, GENESIS32, Pocket GENESIS, BizViz
and their respective modules, OPC-To-The-Core, and
Visualize Your Enterprise are trademarks of ICONICS,
Inc. Other product and company names mentioned
herein may be trademarks of their respective owners.

GenStatistics Runtime Viewer

The GenStatistics Runtime Viewer provides GenBroker/GenClient runtime data tracking for applications running in the GENESIS32 system. The GenStatistics Viewer is designed for systems integrators, OEMs and customers who want to have tools for doing their own troubleshooting and diagnostics. The GenStatistics application gets the runtime statistics in an XML format from the application (actually from GenClient the particular application is using).


To launch the GenStatistics Viewer from client applications (e.g. GraphWorX32):

1. Select **Data Statistics** from the **View** menu in runtime mode, as shown in the figure below.

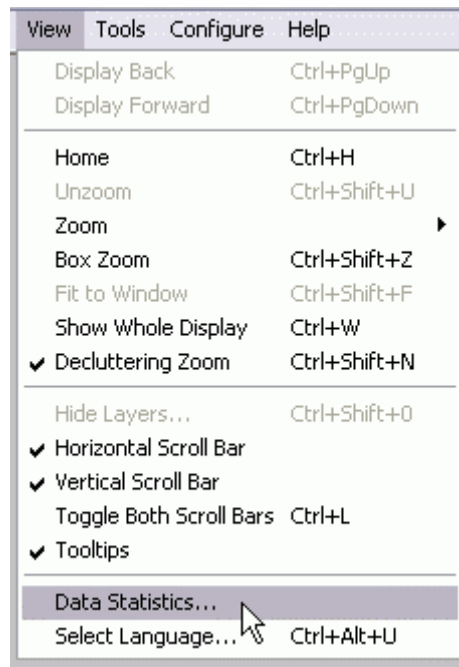

Opening the GenStatistics Viewer

2. The **GenStatistics Viewer** dialog is launched displaying runtime information, as shown in the figure below. This dialog is implemented in the GenClient/OLExpress DLL library, and it is available throughout the GENESIS32 applications. Click the **Refresh** button periodically to update the data.

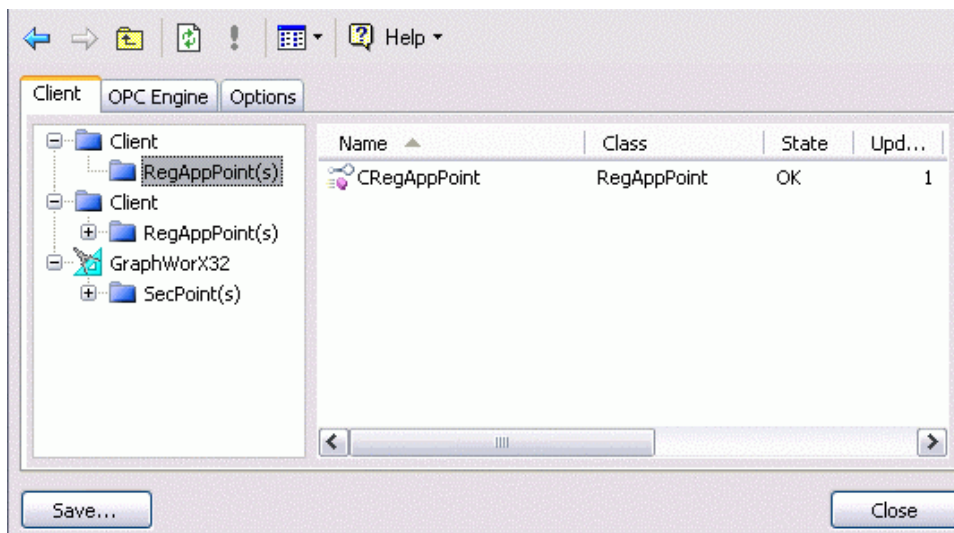


GenStatistics Runtime Viewer

There are three main tabs in the dialog that are displayed in a standard format (like Windows Explorer):

- Client Tab
- OPC Engine Tab
- Options Tab

Client Tab


The **Client** tab of the GenStatistics Runtime Viewer contains subtrees for each instance of the GenClient object the given application is using. Note that there may be additional GenClient instances for one application. Under the GenClient instances there are points used, sorted into groups by the kind of data the points are accessing. Note there are **OPCSecPoints** (for OPC DataPoints with security), **SecPoints** (for security) and **RegAppPoints** (for registering applications at GenRegistrar).

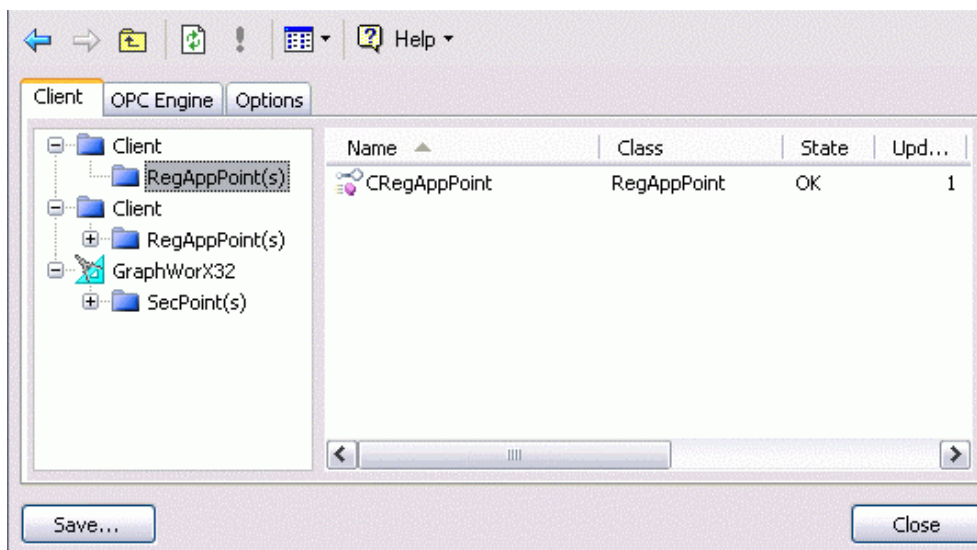

GenStatistics Runtime Viewer: GenClient Tab

OPC Engine Tab


The **OPC Engine** tab of the GenStatistics Runtime Viewer aggregates all points requested by the given application and groups them for particular servers (if GenClient communicates with the given server directly via OPC Direct) or by a GenWrapper (if GenClient uses a channel to communicate with the given server). The statistics data are then related to the given channel or server type.

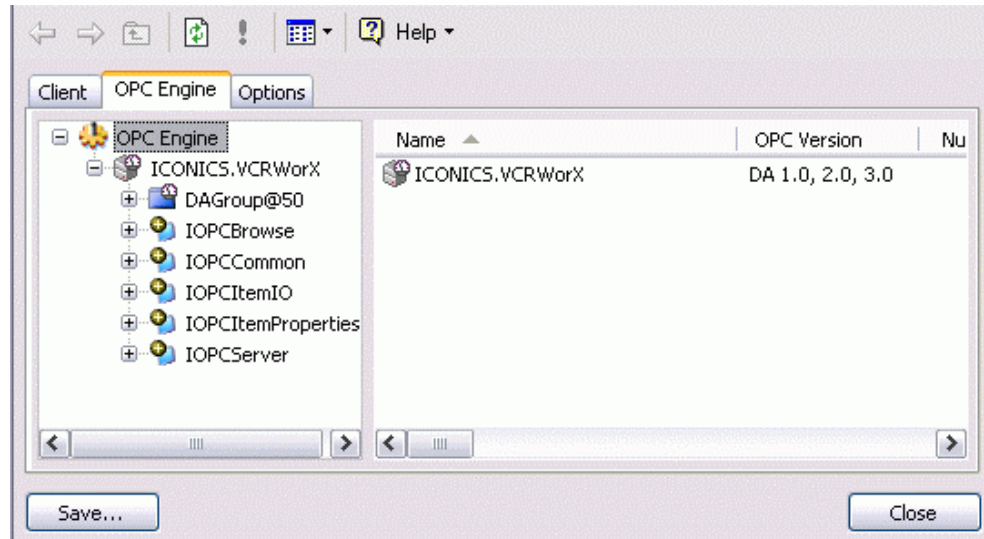

GenStatistics Runtime Viewer: OPC Engine Tab

Options Tab

The **Options** tab of the GenStatistics Runtime Viewer displays the settings from the GenBroker Configurator. This is helpful for debugging because it contains the actual GenBroker settings.

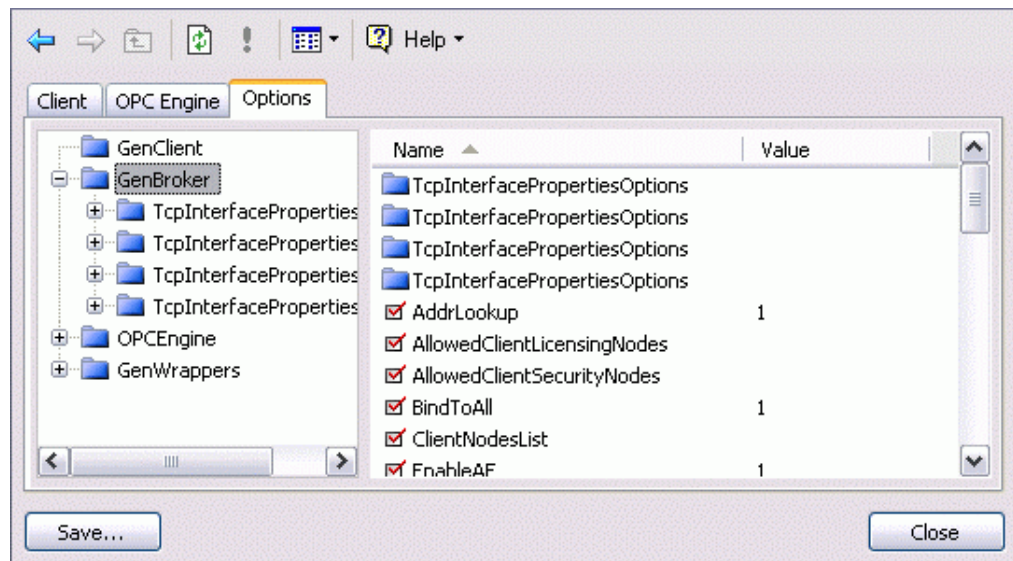


GenStatistics Runtime Viewer: Options Tab

GenBroker Tab


When you start the GenBroker server from MonitorWorX, a **Statistics** menu item appears, as shown in the figure below. To start GenBroker:

1. Launch MonitorWorX from the Windows **Start** menu by selecting **Programs > ICONICS GENESIS32 > MonitorWorX**.
2. To display the MonitorWorX user interface, right-click on the MonitorWorX icon in the Windows taskbar and select **Show Viewer** from the pop-up menu, as shown in the figure below.



Displaying the MonitorWorX Viewer


3. In the tree control, right-click on **GenBroker** and select **Start** from the pop-up menu, as shown in the figure below. This activates the GenBroker Server. Then select **Statistics**, as shown in the figure below.

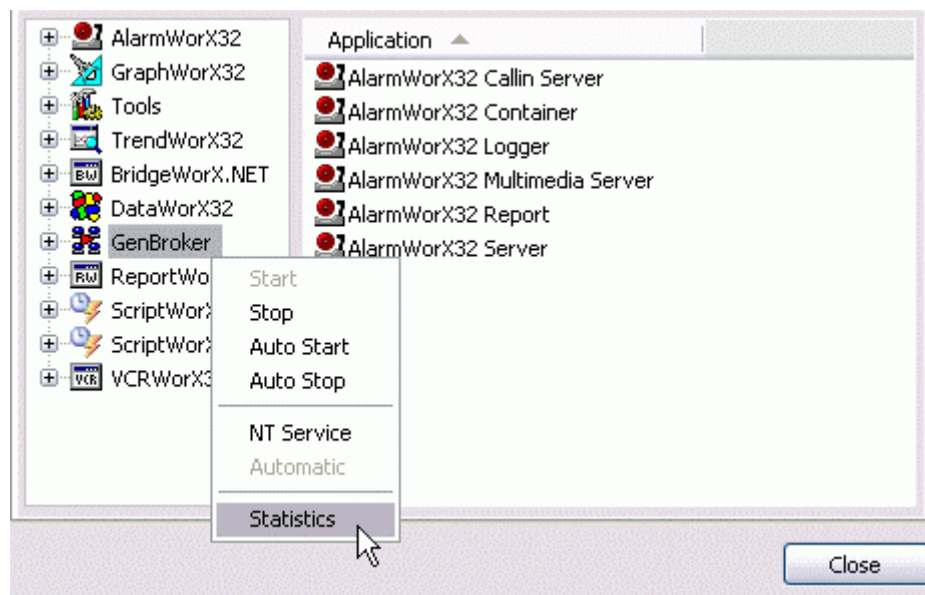

Starting the GenBroker Server on the Server Node

Selecting **Statistics** opens the **GenBroker** tab of the GenStatistics Runtime Viewer, as shown in the figure below. This tab lists the IP address, port number, and other information about the following servers:

- TCP/IP server
- SOAP/XML server
- DCOM server

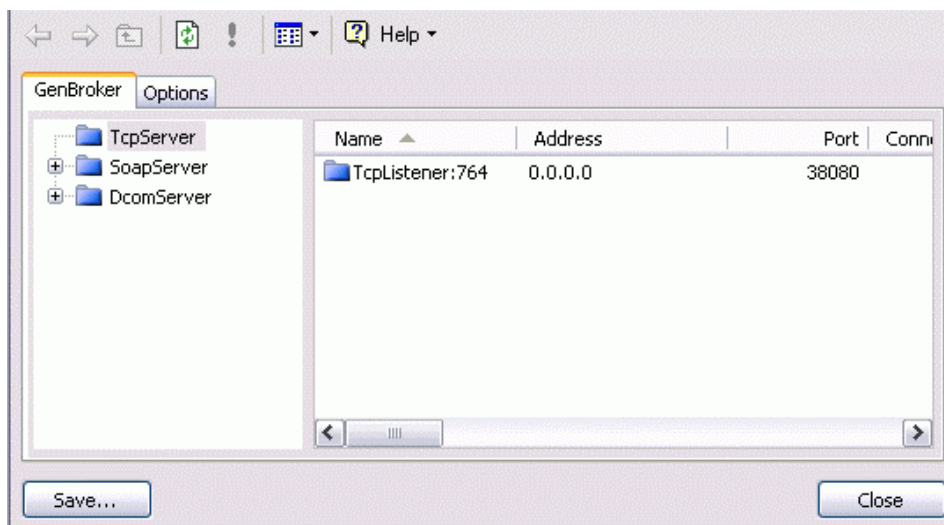


GenStatistics Runtime Viewer: GenBroker Tab

Saving Runtime Data to a Log File

The GenStatistics Viewer tracks the runtime activity for each GENESIS32 application and logs the runtime data to an XML log file. To export the runtime statistics data to an XML log file:


1. Click the **Save** button. This opens the **Save As** dialog box, as shown in the figure below. Give the log file a name, and then click **Save**.

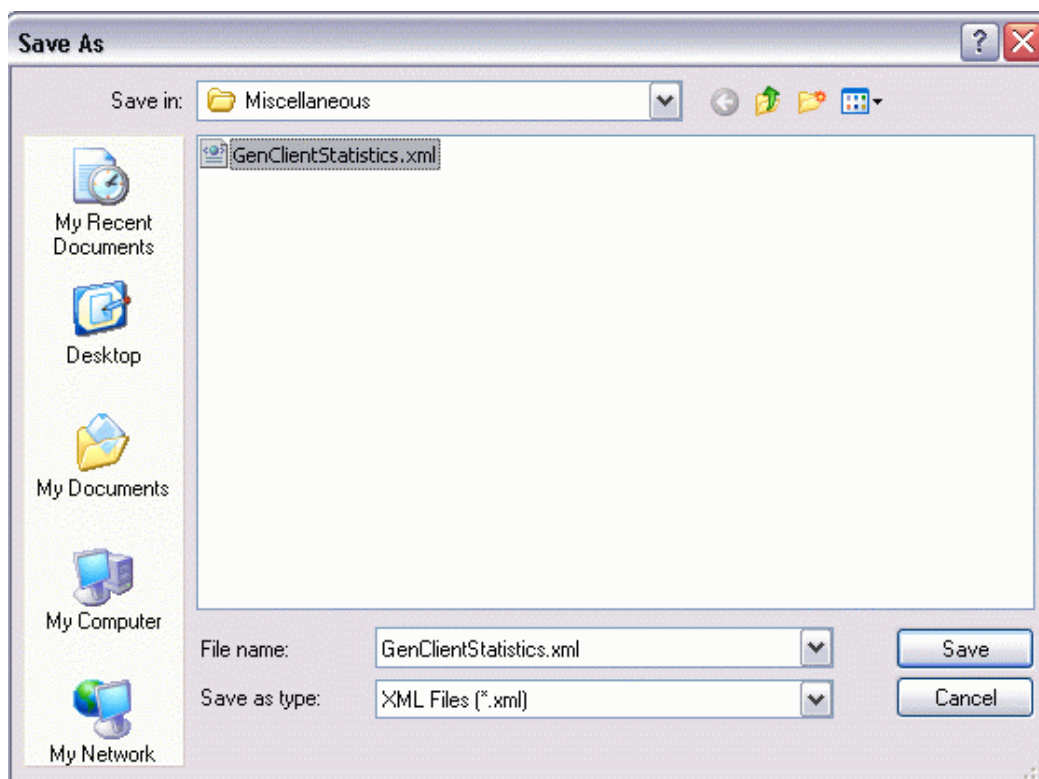

Saving the GenStatistics Viewer Data

2. You can view the exported XML log file in your Web browser, such as Microsoft Internet Explorer, as shown in the figure below. The log file provides a thorough, color-coded report that mimics the expandable tree structure in the GenStatistics Viewer, detailing all activity for the application including the product, its version number, and the date. If you are experiencing problems with any applications, you can e-mail the log file as a detailed report to technical support. Developers can use these reports to identify the source of the problems.

Note: It is possible to view the XML file later on (offline) for debugging purposes.

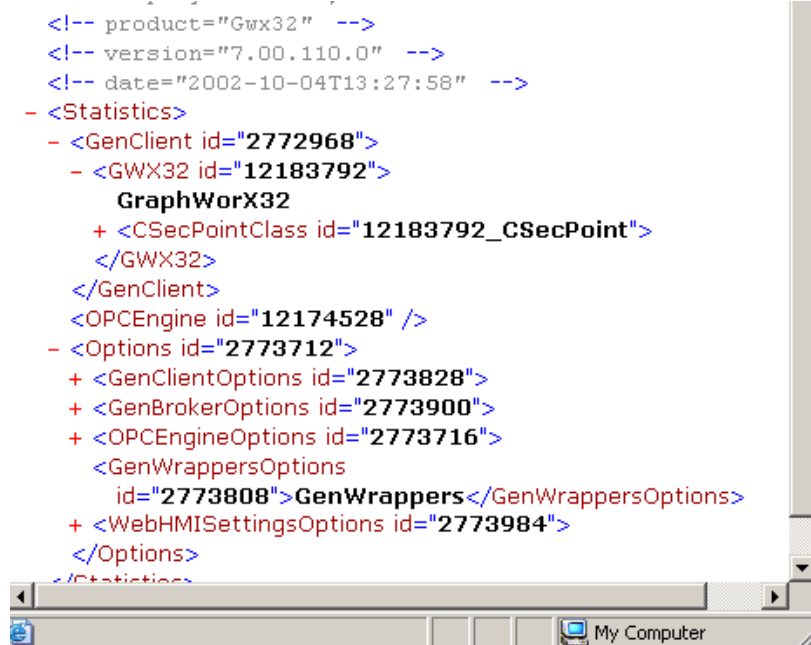


Viewing the Exported XML Statistics File

GenStatistics Offline Viewer

To view data statistics outside runtime:

1. Launch the GenStatistics Viewer from the Windows **Start** menu by selecting **Programs > ICONICS Tools > GenStatistics Viewer**.
2. This launches the **Open** dialog box, as shown in the figure below. Browse for the GenStatistics XML log file name, and then click **Open**, as shown in the figure below.

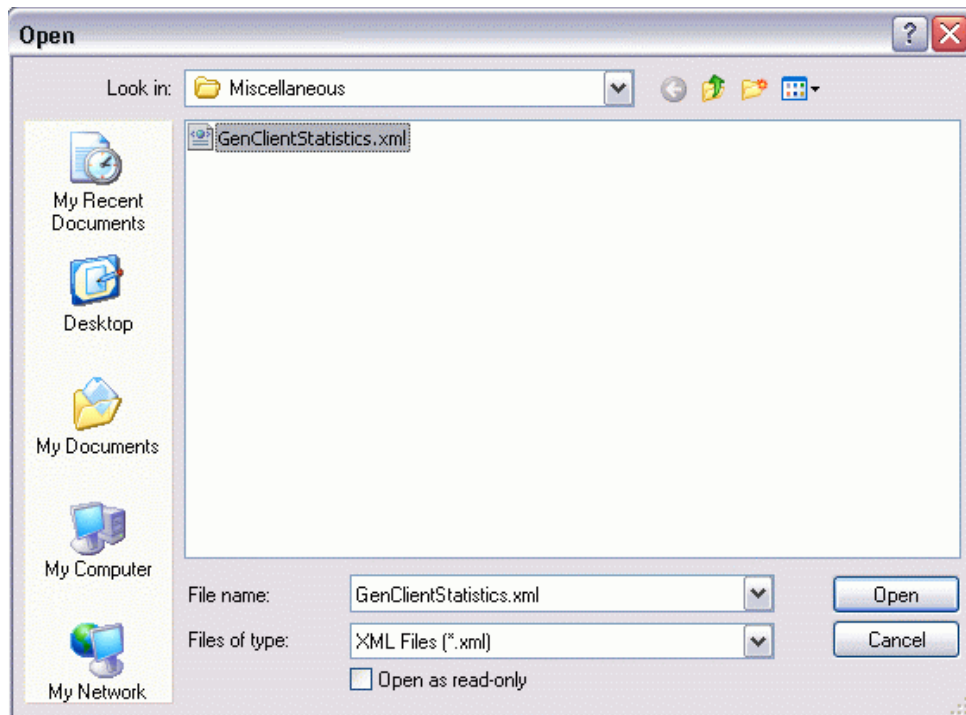

Opening the Log File

3. The data from the log file are displayed in the **GenStatistics Viewer** dialog.