SLD1095
10.4” TFT LCD, LED Backlight 1000nits,XGA

10.4” TFT LCD panel, built-in 1000 nits high bright for sunlight readable LCD display, high transmittance color filter, high transmission polarizing plates, Low Power Consumption, suitable for kiosk, advertising, POS, marline, transportation, gaming, studio display, gas pump.

Key Features
- Sunlight Readable
- LED Backlight
- High Shock & Vibration Resistance
- Low Power Consumption
- Wide Operation Temperature. (-20℃~ 70℃)
- High Uniformity (90%)
- Low EMI Noise
- Wide Dimming
- Life Expectancy (70,000hrs)

Applications
Marline, Military,
Medical, Transportation
Industrial

Specifications V1

Model No.	**SLD1095**
Description	10.4" TFT LCD, LED Backlight 1000 nits, XGA
Display Area (mm)	210.432 (H) x 157.824(V) mm
Brightness	1,000 cd/m^2
Resolution	1024 x 768 (XGA)
Contrast Ratio	600 : 1
Pixel Pitch (mm)	0.2055(H) x 0.2055(V)
Viewing Angle	+89°~-89°(H), +89°~-89°(V)
Display Colors	262,144 colors
Response Time (Typical)	36ms (Typical)
Sync	LVDS
Power Consumption	4.7W
Dimensions (mm)	249.2(W) x 206.2(H) x 45.8(D)mm
Weight (Net)	1.64
LED Driving Board	LID 10A07
Control Board (Optional)	☐AD5621GA ☐AD5621GD ☐AD5766GDVA ☐AD2662GDVAR
☐AD5621GA	VGA+Audio
☐AD5621GD	VGA+DVI
☐AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☐AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	☐5 Key ☐4 Key
☐**5 Key**	Power Switch, Menu, Select (+,-), Auto
☐**4 Key**	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock…
Optional	☐AOT ☐Touch Screen

Specifications are subject to change without notice.
All brands or product names are trademarks or registered trademarks of their respective companies.

DLF= Panel+LED Driving Board

DLH= Panel+LED Driving Board+Control Board

Mechanical Drawing

Outline Dimensions

Unit:mm

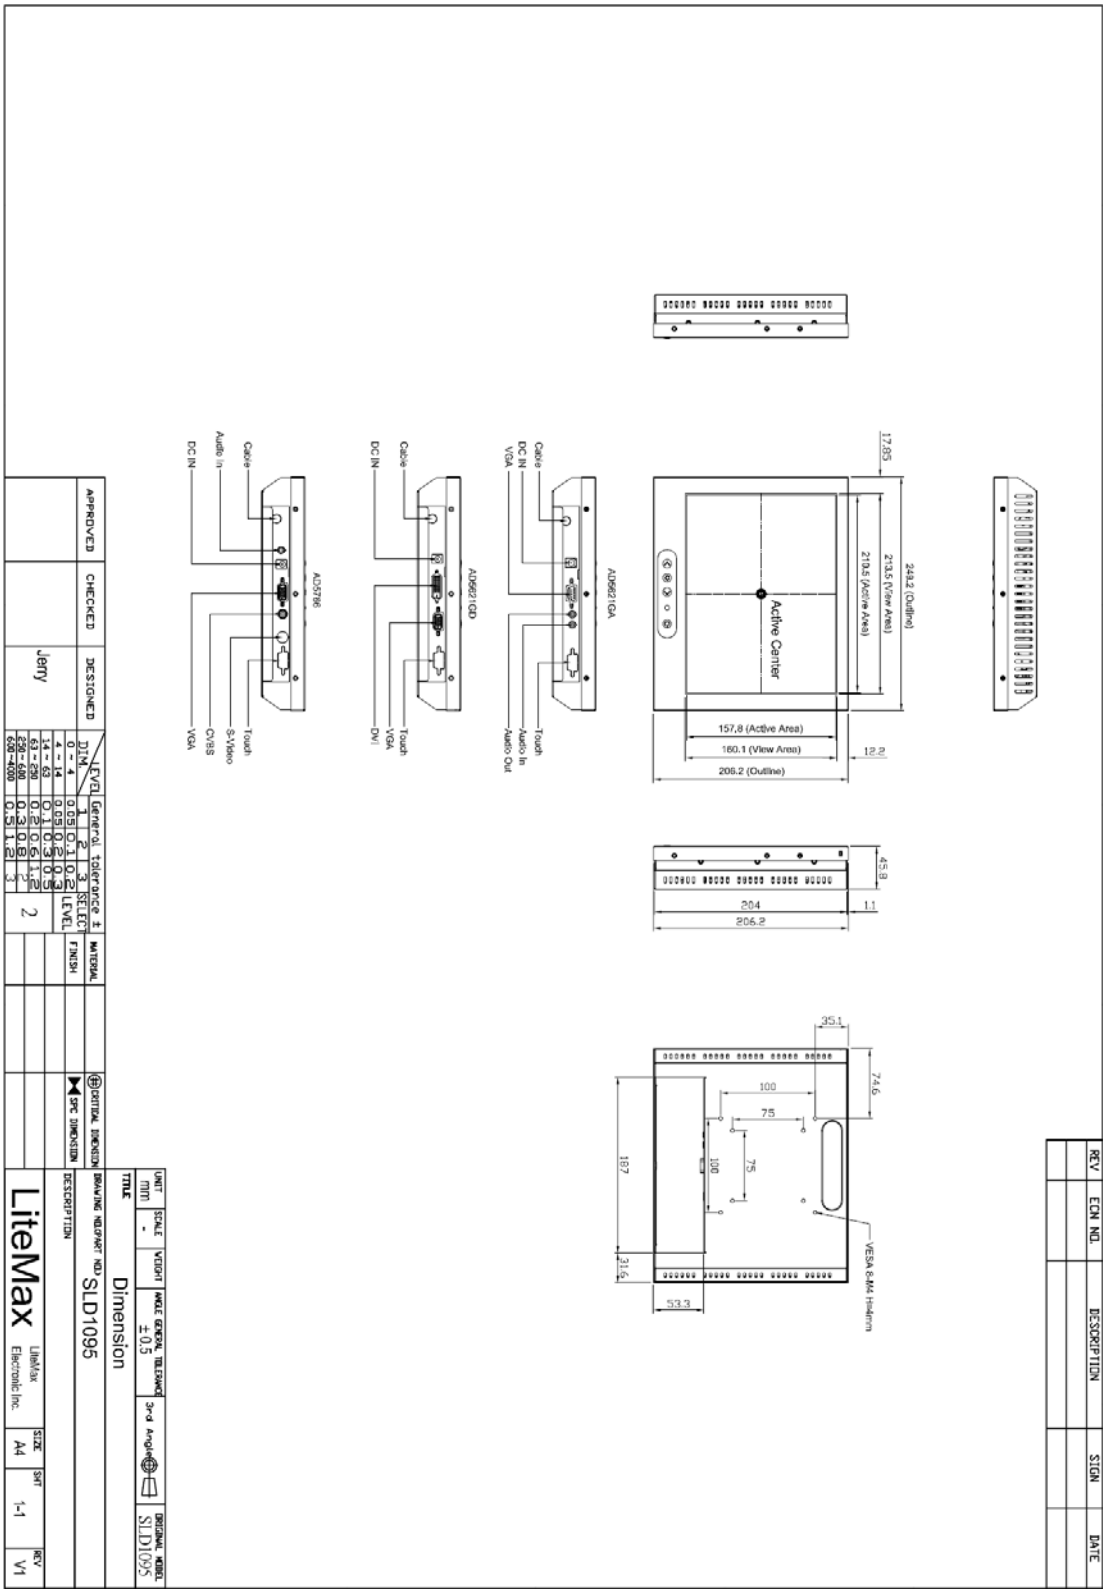

Ordering Information

Model Name	Description
SLD1095-EGA-A01	10.4",1000nits,XGA,AD5621GA,LID10A,O/F,AR Glass,V01

Optional Accessories

Part Number	Description
840612051100	ADAPTER.12V.5A.60W.EA1050A,P
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301030	CABLE.POWER.AC.1830mm Japan type